

09/29/00
jc685 U.S. PTO

PTO/SB/50 (2/98)

Approved for use through 09/30/2000. OMB 0651-0033

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

REISSUE PATENT APPLICATION TRANSMITTAL
DIVISIONAL OF REISSUE APPLICATION SERIAL NO. 09/244,037

Address to:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

Attorney Docket No. 2000_1328
First Named Inventor Mitsunaki OSHIMA et al.
Original Patent Number 5,600,672
Original Patent Issue Date February 4, 1997
(Month/Day/Year)
Express Mail Label No.

APPLICATION FOR REISSUE OF:

(check applicable box) ☒ Utility Patent

☐ Design Patent

☐ Plant Patent

APPLICATION ELEMENTS

1. ☒ Fee Transmittal Form (PTO/SB/56)
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification and Claims
(amended, if appropriate)
3. ☒ Drawing(s)
(proposed amendments, if appropriate)
4. ☒ Reissue Oath / Declaration (original or copy)
(37 CFR 1.175)(PTO/SB/51 or 52)
5. Original U.S. Patent
☒ Offer to Surrender Original Patent (37 CFR 1.178)
(PTO/SB/53 or PTO/SB/54)
or
☐ Ribboned Original Patent Grant
☐ Affidavit/Declaration of Loss (PTO/SB/55)
6. Original U.S. Patent currently assigned?
☒ Yes ☐ No
(If Yes, check applicable box(es))
☒ Written Consent of all Assignees
(PTO/SB/53 or 54)
☒ 37 CFR 3.73(b) Statement
☒ Power of Attorney

ACCOMPANYING APPLICATION PARTS

7. ☒ Foreign Priority Claim (35 USC 119)
(if applicable)
8. ☒ Information Disclosure Statement
(IDS)/PTO-1449
☒ Copies of IDS Citations
9. English Translation of Reissue
Oath/Declaration (if applicable)
10. ☐ Small Entity Statement
☐ Statement filed in prior application
Status Still proper and desired
11. ☒ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☒ Other:
1. Request to Transfer Formal Drawings
from Patent File
2. Cover Letter for Application Filed
Without Executed Declaration

15. CORRESPONDENCE ADDRESS

WENDEROTH, LIND & PONACK
2033 "K" Street, Suite 800
Washington, D.C. 20006
Phone:(202) 721-8200
Fax:(202) 721-8250

11. SIGNATURE OF APPLICANT, ATTORNEY OR AGENT REQUIRED

NAME

Jeffrey R. Filipek

Reg. No. 41,471

SIGNATURE

DATE

September 29, 2000

THE COMMISSIONER IS AUTHORIZED
TO CHANGE BY ENDORSEMENT IN THE
TOP FOR THIS PART TO DEPOSIT
ACCOUNT NO. 28-0975.

THE COMMISSIONER IS AUTHORIZED
TO CHARGE THE DEFICIENCY IN MY
FEE AND ADD SAME TO DEPOSIT
ACCOUNT NO. 23-0975

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of : **Attn: BOX REISSUE**
U.S. Patent No.5,600,672 : **Atty. Docket No. 2000_1328**
Issued February 4, 1997 :
Mitsuaki OSHIMA et al. :
Serial No. NEW :
Filed September 29, 2000 :
COMMUNICATION SYSTEM :
(Reissue Divisional
of Serial No. 09/244,037,
Filed February 4, 1999)

PATENT OFFICE FEE TRANSMITTAL FORM

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Attached hereto is a check in the amount of \$924.00 to cover Patent Office fees relating to filing the following attached papers:

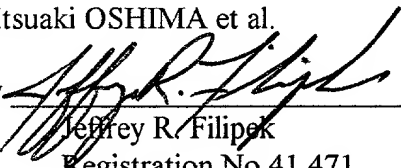
Reissue Application \$924.00

A duplicate copy of this paper is being submitted for use in the Accounting Division, Office of Finance.

The Commissioner is authorized to charge any deficiency or to credit any overpayment associated with this communication to Deposit Account No. 23-0975, with the EXCEPTION of deficiencies in fees for multiple dependent claims in new applications.

Respectfully submitted,

Mitsuaki OSHIMA et al.

By 
Jeffrey R. Filipek
Registration No.41,471
Agent for Patentees

JRF/fs
WENDEROTH, LIND & PONACK, L.L.P.
2033 K St., N.W., Suite 800
Washington, D.C. 20006
Telephone (202) 721-8200
September 29, 2000

40098
[Check No. _____]

2000_1328

THE COMMISSIONER IS AUTHORIZED
TO CURE ANY DEFICIENCY IN THE
RECORD AND PLEASE TO DEPOSIT
200001 09/244-0375

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of : Attn: **BOX REISSUE**
U.S. Patent No.5,600,672 : **Atty. Docket No. 2000_1328**
Issued February 4, 1997 :
Mitsuaki OSHIMA et al. :
Serial No. NEW :
Filed September 29, 2000 :
COMMUNICATION SYSTEM :
(Reissue Divisional
of Serial No. 09/244,037,
Filed February 4, 1999)

COVER LETTER FOR APPLICATION FILED
WITHOUT EXECUTED DECLARATION

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

The above-identified application has been submitted without an executed oath or declaration pursuant to 37 C.F.R. 1.41(c).

It is respectfully requested that this application be assigned a serial number and awarded a filing date pursuant to 37 C.F.R. 1.53.

A duly executed oath or declaration pursuant to 37 C.F.R. 1.63 will be submitted after notification by the U.S. Patent and Trademark Office pursuant to 37 C.F.R. 1.53(d).

006260 09244-0375

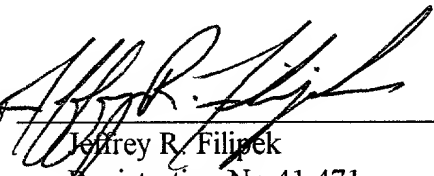
A non-executed copy of the Declaration and Power of Attorney, containing the inventorship information, is attached. It is respectfully requested that all communications be directed to the firm indicated on the attached Declaration and Power of Attorney, namely:

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street N.W., Suite 800
Washington, D.C. 20006

The required U.S. Patent and Trademark Office Filing Fee is submitted herewith.

Respectfully submitted,

Mitsuaki OSHIMA et al.

By 
Jeffrey R. Filipek
Registration No. 41,471
Agent for Patentees

JRF/fs
WENDEROTH, LIND & PONACK, L.L.P.
2033 K St., N.W., Suite 800
Washington, D.C. 20006
Telephone (202) 721-8200
September 29, 2000

THE COMMISSIONER IS AUTHORIZED
TO CHARGE ANY DEFICIENCY IN THE
FEE FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 25-0975.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of : Attn: **BOX REISSUE**
U.S. Patent No. 5,600,672 : **Atty. Docket No. 2000_1328**
Issued February 4, 1997 :
Mitsuaki OSHIMA et al. :
Serial No. NEW :
Filed September 29, 2000 :
COMMUNICATION SYSTEM :
(Reissue Divisional
of Serial No. 09/244,037,
Filed February 4, 1999)

CONSENT OF ASSIGNEE AND 37 C.F.R. 3.73(b) STATEMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Matsushita Electric Industrial Co., Ltd., the assignee of the entire interest in the above-mentioned letters patent, hereby consents to the above-identified reissue application.

In accordance with 37 C.F.R. 3.73(b) the assignee hereby establishes its ownership of the above-identified U.S. patent by specifying that evidence of such ownership was recorded on October 10, 1996 in the U.S. Patent and Trademark Office at reel 8174, frame 0306. Accordingly, to the best of the assignee's knowledge and belief, title is in the assignee seeking to take this action.

The undersigned is authorized to act on behalf of the assignee.

I hereby declare that all statements made herein of my own knowledge are true, and that all statements made on information and belief are believed to be true; and further, that these statements are made with the knowledge that willful false statements, and the like so made, are punishable by fine

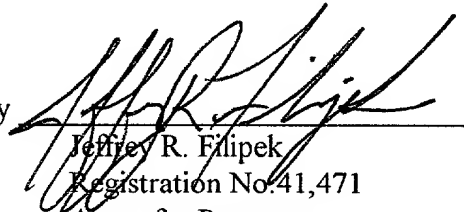
005260-94622960

or imprisonment, or both, under §1001, Title 18 of the U.S. Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Respectfully submitted,

Mitsuaki OSHIMA et al.

By


Jeffrey R. Filipek
Registration No. 41,471
Agent for Patentees

JRF/fs
WENDEROTH, LIND & PONACK, L.L.P.
2033 K St., N.W., Suite 800
Washington, D.C. 20006
Telephone (202) 721-8200
September 29, 2000

THE COMMISSIONER IS AUTHORIZED
TO CHARGE THE PETITIONER IN THE
FEE FOR THIS APPLICATION TO DEPOSIT
ACCOUNT NO. 25-0975.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Reissue Application of : Attn: **BOX REISSUE**
U.S. Patent No. 5,600,672 : **Atty. Docket No. 2000_1328**
Issued February 4, 1997 :
Mitsuaki OSHIMA et al. :
Serial No. NEW :
Filed September 29, 2000 :
COMMUNICATION SYSTEM :
(Reissue Divisional
of Serial No. 09/244,037,
Filed February 4, 1999)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Please amend the above-identified application as follows.

IN THE SPECIFICATION:

Page 1, after the title of the invention, insert the following paragraph:

--This is a reissue application of U.S. Patent No. 5,600,672, issued February 4, 1997, and a divisional application of reissue application No. 09/244,037, filed February 4, 1999, which is also a reissue application of U.S. Patent No. 5,600,672, issued February 4, 1997.--

IN THE CLAIMS:

Please cancel claims 1-12 without prejudice or disclaimer to the subject matter therein. Please add new claims 13-18 as follows.

--13. A signal transmission and reception apparatus for transmitting and receiving a VSB signal, said transmission and reception apparatus comprising a transmission apparatus and a reception apparatus,

said transmission apparatus being for use with a source signal having a first data stream and a second data stream, said transmission apparatus comprising:

an error correction encoder operable to trellis encode the second data stream;

a modulator operable to modulate the first data stream and the second data stream, such that the number of signal points of the first data stream in a signal space is different from the number of signal points of the second data stream in the signal space and such that the first data stream has data for demodulation including information representing the number of signal points of the second data stream in a signal space and such that the number of signal points of the first data stream is equal to or less than 4, to produce a VSB modulation signal, said modulator comprising an allocator operable to allocate code points along a uniaxial modulation coordinate system, and a filter, having a plurality of coefficients which are a series of impulse responses defined by plotting time base responses to the VSB modulation signal along the in-phase axis and its orthogonal axis, operable to filter a series of the code points allocated along the uniaxial modulation coordinate system; and

a transmitter operable to transmit the VSB modulation signal;

said reception apparatus comprising:

a receiver operable to receive a transmitted VSB modulation signal;

a demodulator operable to demodulate the VSB modulation signal, received by said receiver, into the first and second data streams, and to demodulate the second data stream according to the data for demodulation in the first data stream; and

an error correction decoder operable to trellis decode the second data stream.

14. A signal transmission apparatus for transmitting a VSB signal, for use with a source signal having a first data stream and a second data stream, said signal transmission apparatus comprising:

an error correction encoder operable to trellis encode the second data stream;

a modulator operable to modulate the first data stream and the second data stream, such that the number of signal points of the first data stream in a signal space is different from the number of signal points of the second data stream in the signal space and such that the first data stream has data for demodulation including information representing the number of signal points of the second data stream in a signal space and such that the number of signal points of the first data stream is equal to or less than 4, to produce a VSB modulation signal, said modulator comprising an allocator operable to allocate code points along a uniaxial modulation coordinate system, and a filter, having a plurality of coefficients which are a series of impulse responses defined by plotting time base responses to the VSB modulation signal along the in-phase axis and its orthogonal axis, operable to filter a series of the code points allocated along the uniaxial modulation coordinate system; and

a transmitter operable to transmit the VSB modulation signal.

- ✓ 15. A signal reception apparatus comprising:
a receiver operable to receive a transmitted VSB modulation
signal having information of a first data stream and a second data
stream, wherein the number of signal points of the first data stream
assigned in a signal space is different from the number of signal points
of the second data stream in the signal space, the first data stream has
data for demodulation including information representing the number
of signal points of the second data stream in a signal space, and the
number of signal points of the first data stream is equal to or less than
4;

a demodulator operable to demodulate the VSB modulation
signal into the first and second data streams, and to demodulate the
second data stream according to the data for demodulation in the first
data stream; and

an error correction decoder operable to trellis decode the
second data stream.

- ✓ 16. A signal transmission and reception method for transmitting
and receiving a VSB signal, said signal transmission and reception
method being for use with a source signal having a first data stream
and a second data stream, said transmission and reception method
comprising:

trellis encoding the second data stream;

modulating the first data stream and the second data stream,
such that the number of signal points of the first data stream in a signal
space is different from the number of signal points of the second data

stream in the signal space and such that the first data stream has data for demodulation including information representing the number of signal points of the second data stream in a signal space and such that the number of signal points of the first data stream is equal to or less than 4, to produce a VSB modulation signal;

allocating code points along a uniaxial modulation coordinate system;

filtering, with a filter having a plurality of coefficients which are a series of impulse responses defined by plotting time base responses to the VSB modulation signal along the in-phase axis and its orthogonal axis, a series of the code points allocated along the uniaxial modulation coordinate system;

transmitting the VSB modulation signal;

receiving the transmitted VSB modulation signal;

demodulating the VSB modulation signal into the first and second data streams and demodulating the second data stream according to the demodulation information in the first data stream;
and

trellis decoding the second data stream.

17. A signal transmission method for transmitting a VSB signal, for use with a source signal having a first data stream and a second data stream, said signal transmission method comprising:

trellis encoding the second data stream;

modulating the first data stream and the second data stream, such that the number of signal points of the first data stream in a signal space is different from the number of signal points of the second data stream in the signal space and such that the first data stream has data

for demodulation including information representing the number of signal points of the second data stream in a signal space and such that the number of signal points of the first data stream is equal to or less than 4, to produce a VSB modulation signal;

allocating code points along a uniaxial modulation coordinate system;

filtering, with a filter having a plurality of coefficients which are a series of impulse responses defined by plotting time base responses to the VSB modulation signal along the in-phase axis and its orthogonal axis, a series of the code points allocated along the uniaxial modulation coordinate system; and

transmitting the VSB modulation signal.

✓ 18. A signal reception method comprising:

receiving a transmitted VSB modulation signal having information of a first data stream and a second data stream, wherein the number of signal points of the first data stream assigned in a signal space is different from the number of signal points of the second data stream in the signal space, the first data stream has data for demodulation including information representing the number of signal points of the second data stream in a signal space, and the number of signal points of the first data stream is equal to or less than 4;

demodulating the VSB modulation signal into the first and second data streams, and demodulating the second data stream according to the demodulation information in the first data stream; and

trellis decoding the second data stream.--

REMARKS

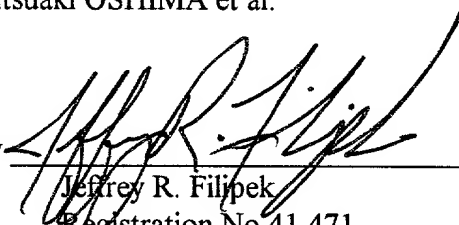
By this preliminary amendment, claims 1-12 have been canceled and claims 13-18 added. Thus, claims 13-18 are active. Support for this amendment is found in the specification at least at column 23, line 32 to column 24, line 27, column 29, lines 7-9, column 48, lines 6-15, and 31-44, column 52, lines 56-65, and in Figs. 24, 58, 61, 62, 68, 156, 159, and 170.

As indicated in the above amendment to the specification, this application is a reissue application of U.S. Patent No. 5,600,672, and a divisional application of reissue application No. 09/244,037, which is also a reissue application of U.S. Patent No. 5,600,672. Further, it is the Patentees' intention to file further divisional reissue applications of U.S. Patent No. 5,600,672. When all such applications are filed and serial numbers are assigned thereto, the specifications of each of the applications will be amended to cross reference each of the other applications.


Respectfully submitted,

Mitsuaki OSHIMA et al.

By


Jeffrey R. Filipek
Registration No. 41,471
Agent for Patentees

JRF/fs
WENDEROTH, LIND & PONACK, L.L.P.
2033 K St., N.W., Suite 800
Washington, D.C. 20006
Telephone (202) 721-8200
September 29, 2000



THE COMMISSIONER IS AUTHORIZED
TO CHARGE ANY DEFICIENCY IN THE
FEES FOR THIS PAPER TO DEPOSIT
ACCOUNT NO. 23-0975

230
4

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of : Attn: BOX REISSUE

Mitsuaki OSHIMA et al. : Docket No. 2000_1328

Serial No. 09/672,946 :

Filed September 29, 2000 :

COMMUNICATION SYSTEM :

LOC 0300
5/29/01

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents,
Washington, D.C.

Sir:

Please amend the above-identified application as follows.

IN THE SPECIFICATION:

Before the heading "BACKGROUND OF THE INVENTION" at page 1, please add the following paragraph:

Further reissue divisional applications have been filed, all of which are reissues of Patent No. 5,600,672 and divisional applications of reissue application 09/244,037. These further applications are: 09/677,421, filed October 5, 2000; 09/678,014, filed October 5, 2000; 09/677,420, filed October 5, 2000; 09/680,177, filed October 5, 2000; 09/680,176, filed October 5, 2000; 09/686,467, filed October 12, 2000; 09/686,463, filed October 12, 2000; 09/686,466, filed October 12, 2000; 09/688,028, filed October 12, 2000; 09/686,464, filed October 12, 2000; 09/686,465, filed October 12, 2000; 09/666,012, filed September 19, 2000; 09/667,525, filed September 21, 2000; 09/667,438, filed September 21, 2000; 09/668,068, filed September 25, 2000; 09/662,695, filed September 15, 2000; 09/669,916, filed September 25, 2000; 09/672,948, filed September 29, 2000; and 09/672,947, filed September 29, 2000.

006260" 94622950

REMARKS

It is requested that the above amendments be entered prior to examination. This Preliminary Amendment is effective to provide a statement that more than one reissue application of Patent No. 5,600,672 has been filed and to identify each of the reissue applications by relationship, application number, and filing date.

Respectfully submitted,

Mitsuaki OSHIMA et al.

By: 

Jeffrey R. Filipek
Registration No. 41,471
Attorney for Applicants

JRF/fs
Washington, D.C.
Telephone (202) 721-8200
Facsimile (202) 721-8250
February 23, 2001

COMMUNICATION SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation-in-part of application Ser. No. 07/857,627, filed Mar. 25, 1992, pending.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a communication system for transmission and reception of a digital signal through modulation of its carrier wave and demodulation of the modulated signal.

2. Description of the Prior Art

Digital signal communication systems have been used in various fields. Particularly, digital video signal transmission techniques have been improved remarkably.

Among them is a digital TV signal transmission method. So far, such digital TV signal transmission systems are in particular use for transmission between TV stations. They will soon be utilized for terrestrial and/or satellite broadcast service in every country of the world.

The TV broadcast systems including HDTV, PCM music, FAX, and other information services are now demanded to increase desired data in quantity and quality for satisfying millions of sophisticated viewers. In particular, the data has to be increased in a given bandwidth of frequency allocated for TV broadcast service. The data to be transmitted is always abundant and provided as much as handled with up-to-date techniques of the time. It is ideal to modify or change the existing signal transmission system corresponding to an increase in the data amount with time.

However, the TV broadcast service is a public business and cannot go further without considering the interests and benefits of viewers. It is essential to have any new service compatible with existing TV receivers and displays. More particularly, the compatibility of a system is much desired for providing both old and new services simultaneously or one new service which can be intercepted by both the existing and advanced receivers.

It is understood that any new digital TV broadcast system to be introduced has to be arranged for data extension in order to respond to future demands and technological advantages and also, for compatibility to allow the existing receivers to receive transmissions.

The expansion capability and compatible performance of prior art digital TV system will be explained.

A digital satellite TV system is known in which NTSC TV signals compressed to an about 6 Mbps are multiplexed by time division modulation of 4 PSK and transmitted on 4 to 20 channels while HDTV signals are carried on a signal channel. Another digital HDTV system is provided in which HDTV video data compressed to as small as 15 Mbps are transmitted on a 16 or 32 QAM signal through ground stations.

Such a known satellite system permits HDTV signals to be carried on the channel by a conventional manner, thus occupying a band of frequencies equivalent to the same channels of NTSC signals. This causes the corresponding NTSC channels to be unavailable during the transmission of the HDTV signal. Also, the compatibility between NTSC and HDTV receivers or displays is hardly concerned and

09572946-092900

Such a common terrestrial HDTV system offers an HDTV service on conventional 16 or 32 QAM signals without any modification. In any analogue TV broadcast service, there are developed a lot of signal attenuating or shadow regions within its service area due to structural obstacles, geographical inconveniences, or signal interference from a neighbor station. When the TV signal is an analogue from, it can be intercepted more or less at such signal attenuating regions although its reproduced picture is low in quality. If TV signal is a digital form, it can rarely be reproduced at an acceptable level within the regions. This disadvantage is critically hostile to the development of any digital TV system.

It is an object of the present invention, for solving the foregoing disadvantages, to provide a communication system arranged for compatible use for both the existing NTSC and newly introduced HDTV broadcast services, particularly via satellite and also, for minimizing signal attenuating or shadow region of its service area on the grounds.

In operation, the input signal containing a first data stream of n values and a second data stream is fed to the modulator circuit of the transmitter where a modified m -bit QAM carrier wave is produced representing m signal points in a vector field. The m signal points are divided into n signal point groups to which the n values of the first data stream are assigned respectively. Also, data of the second data stream are assigned to m/n signal points or sub groups of each signal point group. Then, a resultant transmission signal is transmitted from the transmitter circuit. Similarly, a third data stream can be propagated.

Upon receiving the same transmission signal from the transmitter, a receiver equipped with a large sized antenna and capable of large-data modulation can reproduce both the first and second data streams. A receiver equipped with a small sized antenna and capable of small-data modulation can reproduce the first data stream only. Accordingly, the compatibility of the signal transmission system will be ensured. When the first data stream is an NTSC TV signal

or low frequency band component of an HDTV signal and the second data stream is a high frequency band component of the HDTV signal, the small-data modulation receiver can reconstruct the NTSC TV signal and the large-data modulation receiver can reconstruct the HDTV signal. As understood, a digital NTSC/HDTV simultaneous broadcast service will be feasible using the compatibility of the signal transmission system of the present invention.

More specifically, the communication system of the present invention comprises: a transmitter having a signal input circuit, a modulator circuit for producing m signal points, in a signal vector field through modulation of a plurality of out-of-phase carrier waves using an input signal supplied from the input, and a transmitter circuit for transmitting a resultant modulated signal, in which the main procedure includes receiving an input signal containing a first data stream of n values and a second data stream, dividing the m signal points of the signal into n signal point groups, assigning the n values of the first data stream to the n signal point groups respectively, assigning data of the second data stream to signal points of each signal point group respectively, and transmitting the resultant modulated signal; and a receiver having an input circuit for receiving the modulated signal, a demodulator circuit for demodulating p signal points of a QAM carrier wave, and an output circuit, in which the main procedure includes dividing the p signal points into n signal point groups, demodulating the first data stream of which n values are assigned to the n signal point groups respectively, and demodulating the second data stream of which p/n values are assigned to p/n signal points of each signal point group respectively. For example, a transmitter produces a modified m -bit QAM signal of which first, second, and third data streams, each carrying n values, are assigned to relevant signal point groups with a modulator. The signal can be intercepted and the first data stream only reproduced by a first receiver, both the first and second data streams can be reproduced by a second receiver, and all the first, second, and third streams can be reproduced by a third receiver.

More particularly, a receiver capable of demodulation of n -bit data can reproduce n bits from a multiple-bit modulated carrier wave carrying m -bit data where $m > n$, thus allowing the communication system to have compatibility and capability of future extension. Also, a multi-level signal transmission will be possible by shifting the signal points of QAM so that a nearest signal point to the origin point of I-axis and Q-axis coordinates is spaced nf from the origin where f is the distance of the nearest point from each axis and n is more than 1.

Accordingly, a compatible digital satellite broadcast service for both the NTSC and HDTV systems will be feasible when the first data stream carries an NTSC signal and the second data stream carries a difference signal between NTSC and HDTV. Hence, the capability of corresponding to an increase in the data amount to be transmitted will be ensured. Also, on the ground, the service area will be increased while signal attenuating areas are decreased.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of the entire arrangement of a signal transmission system showing a first embodiment of the present invention;

FIG. 2 is a block diagram of a transmitter of the first embodiment;

FIG. 3 is a vector diagram showing a transmission signal of the first embodiment;

FIG. 4 is a vector diagram showing a transmission signal of the first embodiment;

FIG. 5 is a view showing an assignment of binary codes to signal points according to the first embodiment;

FIG. 6 is a view showing an assignment of binary codes to signal point groups according to the first embodiment;

FIG. 7 is a view showing an assignment of binary codes to signal points in each signal point group according to the first embodiment;

FIG. 8 is a view showing another assignment of binary codes to signal point groups and their signal points according to the first embodiment;

FIG. 9 is a view showing threshold values of the signal point groups according to the first embodiment;

FIG. 10 is a vector diagram of a modified 16 QAM signal of the first embodiment;

FIG. 11 is a graphic diagram showing the relationship between antenna radius r_2 and transmission energy ratio n according to the first embodiment;

FIG. 12 is view showing the signal points of a modified 64 QAM signal of the first embodiment;

FIG. 13 is a graphic diagram showing the relationship between antenna radius r_3 and transmission energy ratio n according to the first embodiment;

FIG. 14 is a vector diagram showing signal point groups and their signal points of the modified 64 QAM signal of the first embodiment;

FIG. 15 is an explanatory view showing the relationship between A_1 and A_2 of the modified 64 QAM signal of the first embodiment;

FIG. 16 is a graph diagram showing the relationship between antenna radius r_2 and r_3 and transmission energy ratio n_{16} and n_{64} respectively according to the first embodiment;

FIG. 17 is a block diagram of a digital transmitter of the first embodiment;

FIG. 18 is a signal space diagram of a 4 PSK modulated signal of the first embodiment;

FIG. 19 is a block diagram of a first receiver of the first embodiment;

FIG. 20 is a signal space diagram of a 4 PSK modulated signal of the first embodiment;

FIG. 21 is a block diagram of a second receiver of the first embodiment;

FIG. 22 is a vector diagram of a modified 16 QAM signal of the first embodiment;

FIG. 23 is a vector diagram of a modified 64 QAM signal of the first embodiment;

FIG. 24 is a flowchart showing the operation of the first embodiment;

FIG. 25(a) and 25(b) are vector diagrams respectively showing an 8 and a 16 QAM signal of the first embodiment;

FIG. 26 is a block diagram of a third receiver of the first embodiment;

FIG. 27 is a view showing signal points of the modified 64 QAM signal of the first embodiment;

FIG. 28 is a flowchart showing another the operation of the first embodiment;

FIG. 29 is a schematic view of the entire arrangement of a signal transmission system showing a third embodiment of the present invention;

FIG. 30 is a block diagram of a first video encoder of the third embodiment;

FIG. 56 is a diagram showing a signal interference region between two digital TV stations according to the fourth embodiment;

FIG. 78 is a block diagram of a video decoder of the fifth embodiment;

FIG. 105 is a graphic diagram showing the relationship between signal level and distance from a transmitter antenna

FIG. 126(b) is a view showing a frequency assignment of an OFDM signal of the ninth embodiment, wherein two

channels of two-layer OFDM are weighted by transmission electric power;

FIG. 126(c) is a view showing a frequency assignment of an OFDM signal of the ninth embodiment, wherein carrier intervals are doubled by weighting;

FIG. 126(d) is a view showing a frequency assignment of an OFDM signal of the ninth embodiment, wherein carrier intervals are not weighted;

FIG. 127 is a block diagram showing a transmitter/receiver according to the ninth embodiment;

FIG. 128(a) is a block diagram of a trellis encoder (ratio $\frac{1}{2}$) in embodiments 2, 4, and 5,

FIG. 128(b) is a block diagram of a trellis encoder (ratio $\frac{2}{3}$) in embodiments 2, 4, and 5,

FIG. 128(c) is a block diagram of a trellis encoder (ratio $\frac{3}{4}$) in embodiments 2, 4, and 5,

FIG. 128(d) is a block diagram of a trellis decoder (ratio $\frac{1}{2}$) in embodiments 2, 4, and 5,

FIG. 128(e) is a block diagram of a trellis decoder (ratio $\frac{2}{3}$) in embodiments 2, 4, and 5,

FIG. 128(f) is a block diagram of a trellis decoder (ratio $\frac{3}{4}$) in embodiments 2, 4, and 5;

FIG. 129 is a view showing a time assignment of effective symbol periods and guard intervals according to the ninth embodiment;

FIG. 130 is a graphic diagram showing a relationship between C/N rate and error rate according to the ninth embodiment;

FIG. 131 is a block diagram showing a magnetic recording/playback apparatus according to the fifth embodiment;

FIG. 132 is a view showing a recording format of track on the magnetic tape and a travelling of a head;

FIG. 133 is a block diagram showing a transmitter/receiver according to the third embodiment;

FIG. 134 is a diagram showing a frequency assignment of a conventional broadcasting;

FIG. 135 is a diagram showing a relationship between service area and picture quality in a three-level signal transmission system according to the third embodiment;

FIG. 136 is a diagram showing a frequency assignment in case the multi-level signal transmission system according to the third embodiment is combined with FDM;

FIG. 137 is a block diagram showing a transmitter/receiver according to the third embodiment, in which Trellis encoding is adopted;

FIG. 138 is a block diagram showing a transmitter/receiver according to the ninth embodiment, in which a part of low frequency band signal is transmitted by OFDM;

FIG. 139 is a diagram showing an assignment of signal points of the 8-PS-APSK signal of the first embodiment;

FIG. 140 is a diagram showing an assignment of signal points of the 16-PS-APSK signal of the first embodiment;

FIG. 141 is a diagram showing an assignment of signal points of the 8-PS-PSK signal of the first embodiment;

FIG. 142 is a diagram showing an assignment of signal points of the 16-PS-PSK (PS type) signal of the first embodiment;

FIG. 143 is a graphic diagram showing the relationship between antenna radius of satellite and transmission capacity according to the first embodiment;

FIG. 144 is a block diagram showing a weighted OFDM transmitter/receiver according to the ninth embodiment;

FIG. 145(a) is a diagram showing the waveform of the guard time and the symbol time in the multi-level OFDM according to the ninth embodiment, wherein multipath is short;

FIG. 145(b) is a diagram showing the waveform of the guard time and the symbol time in the multi-level OFDM according to the ninth embodiment, wherein multipath is long;

FIG. 146 is a diagram showing a principle of the multi-level OFDM according to the ninth embodiment;

FIG. 147 is a diagram showing subchannel assignment of a two-layer signal transmission system, weighted electric power according to the ninth embodiment;

FIG. 148 is a diagram showing relationship among the D/V ratio, the multipath delay time, and the guard time according to the ninth embodiment;

FIG. 149(a) is a diagram showing time slots of respective layers according to the ninth embodiment;

FIG. 149(b) is a diagram showing time distribution of guard times of respective layers according to the ninth embodiment;

FIG. 149(c) is a diagram showing time distribution of guard times of respective layers according to the ninth embodiment;

FIG. 150 is a diagram showing the relationship between multipath delay time and transfer rate according to the ninth embodiment, wherein a three-layer signal transmission effective to multipath is realized; and

FIG. 151 is a diagram showing the relationship between multipath delay time and C/N ratio according to the ninth embodiment, wherein two-dimensional, matrix type, multi-layer broadcast service can be realized by combining the GTW-OFDM and the C-CDM (or the CSW-OFDM).

FIG. 152 is a timing chart of a 3-level hierarchical television signal at each time slot when GTW-OFDM of the ninth embodiment is combined with C-CDM (or CSW-OFDM);

FIG. 153 shows the relationship between the multipath signal delay time, C/N ratio, and transmission rate when GTW-OFDM of the ninth embodiment is combined with C-CDM (or CSW-OFDM), and is used to describe the hierarchical broadcasting method using three-dimensional matrix structure;

FIGS. 154A-C together form a frequency distribution graph of power weight OFDM in the ninth embodiment;

FIG. 155 shows the position on the time axis of a 3-level hierarchical television signal at each time slot when guard time-OFDM of the ninth embodiment is combined with C-CDM;

FIG. 156 is a block diagram of the transmitter and the receiver in the fourth and fifth embodiments of the invention;

FIG. 157 is a block diagram of the transmitter and the receiver in the fourth and fifth embodiments of the invention;

FIG. 158 is a block diagram of the transmitter and the receiver in the fourth and fifth embodiments of the invention;

FIG. 159(a) is a signal point positioning diagram in 16-level VSB in the fifth embodiment of the invention;

FIG. 159(b) is a signal point positioning (8-level VSB) diagram in 16-level VSB in the fifth embodiment of the invention;

FIG. 159(c) is a signal point positioning (4-level VSB) diagram in 16-level VSB in the fifth embodiment of the invention;

FIG. 159(d) is a signal point positioning (16-level VSB) diagram in 16-level VSB in the fifth embodiment of the invention;

FIG. 160(a) is a block diagram of an ECC encoder in the fifth and sixth embodiments of the invention;

FIG. 160(b) is a block diagram of an ECC decoder in the fifth and sixth embodiments of the invention;

FIG. 161 is an overall block diagram of a VSB receiver in the fifth embodiment of the invention;

FIG. 162 is a block diagram of a the receiver in the fifth embodiment of the invention;

FIG. 163 is a graph of the error rate and C/N ratio curve in 4-level VSB and TC-8-level VSB in the fourth embodiment of the invention;

FIG. 164 is an error rate curve of subchannel 1 and subchannel 2 in 4-level VSB and TC-8-level VSB in the fourth embodiment of the invention;

FIG. 165(a) is a block diagram of the Reed-Solomon encoder in the second, fourth, and fifth embodiments of the invention;

FIG. 165(b) is a block diagram of the Reed-Solomon decoder in the second, fourth, and fifth embodiments of the invention;

FIG. 166 is a flowchart of Reed-Solomon error correction and operation in the second, fourth and fifth embodiments of the invention;

FIG. 167 is a block diagram of the deinterleaver in the second, third, fourth, fifth and sixth embodiments of the invention;

FIG. 168(a) is an interleave/deinterleave table for the second, third, fourth, and fifth embodiments of the invention;

FIG. 168(b) shows the interleave distance in the second, third, fourth, and fifth embodiments of the invention;

FIG. 169 is a comparison of redundancy in 4-level VSB, 8-level VSB, and 16-level VSB in the fifth embodiment of the invention;

FIG. 170 is a block diagram of a television receiver for receiving the high priority signal of the second, third, fourth, and fifth embodiments of the invention;

FIG. 171 is a block diagram of the receiver and transmitter in the second, third, fourth, and fifth embodiments of the invention;

FIG. 172 is a block diagram of the receiver and transmitter in the second, third, fourth, and fifth embodiments of the invention; and

FIG. 173 is a block diagram of an ASK magnetic recording and reproducing apparatus according to the sixth embodiment of the invention;

FIG. 174 is a block diagram showing a circuitry arrangement of QAM/VSB compatible modulator for multi-level transmission according to Embodiment 5.

FIG. 175 is a block diagram showing another circuitry arrangement of the QAM/VSB modulator for multi-level transmission according to Embodiment 5.

FIG. 176 illustrates a third modification of the QAM/VSB modulator of Embodiment 5.

FIG. 177 is a block diagram showing a Trellis decoder in the demodulator of Embodiment 5.

FIG. 178 is a block diagram of a receiver of Embodiment 5 for interception of VSB multi-level transmitted signals emitted in the air.

FIG. 179 is illustrates another arrangement of the QAM/VSB compatible receiver of Embodiment 5.

One embodiment of the present invention will be described referring to the relevant drawings.

In the preferred embodiment of the invention both the transmission apparatus, which comprises a transmitter for transmitting a digital HDTV signal or other digital signal and a receiver for receiving the transmitted signal, and the recording and reproducing apparatus, which records the digital HDTV signal or other digital signal on a magnetic tape or other recording medium and reproduces the recorded signal from said medium, are described.

It should be noted, however, that the configuration, operation, and principle of the digital modulator and demodulator, error correction encoder and decoder, and the encoder and decoder for image coding the HDTV signal are common to the transmission apparatus and the recording and reproducing apparatus, and apply essentially the same technologies. Therefore, to more concisely describe each embodiment, the block diagrams for either the transmission apparatus or the recording and reproducing apparatus are referenced in the description of each embodiment. In addition, the configuration of each embodiment of the invention can be achieved by means of any multi-value digital modulation method, e.g., QAM, ASK and PSK, positioning signal points in a constellation, and for brevity the embodiments of the present invention are described using only one modulation method. FIG. 1 shows the entire arrangement of a signal transmission system according to the first embodiment of the present invention. A transmitter 1 comprises an input unit 2, divider circuit 3, a modulator 4, and a transmitter unit 5. In operation, each input multiplex signal is divided by the divider circuit 3 into three groups, a first data stream D1, a second data stream and, a third data stream D3, which are then modulated by the modulator 4 before being transmitted from the transmitter unit 5. The modulated signal is sent up from an antenna 6 through an uplink 7 to a satellite 10 where it is intercepted by an uplink antenna 11 and amplified by a transponder 12 before being transmitted from a downlink antenna 13 towards the ground.

The transmission signal is then sent down through three downlinks 21, 32, and 41 to a first 23, a second 33, and a third receiver 43 respectively. In the first receiver 23, the signal intercepted by an antenna 22 is fed through an input unit 24 to a demodulator 25 where its first data stream only is demodulated, while the second and third data streams are not recovered, before being transmitted further from an output unit 26.

Similarly, the second receiver 33 allows the first and second data streams of the signal intercepted by an antenna 32 and fed from an input unit 34 to be demodulated by a demodulator 35 and then, combined by a mixer 37 into a single data stream which is then transmitted further from an output unit 36.

The third receiver 43 allows all of the first, second, and third data streams of the signal intercepted by an antenna 42 and fed from an input unit 44 to be demodulated by a demodulator 45 and then, combined by a mixer 47 into a single data stream which is then transmitted further from an output unit 46.

As understood, the three discrete receivers 23, 33, and 43 have their respective demodulators of different characteristics such that their outputs demodulated from the same

Table 1. Demographic characteristics of the study population	
Age (years)	Mean (SD)
Male	55.2 (10.5)
Female	56.8 (11.2)
Marital status	
Married	78.5%
Single	21.5%
Education level	
High school or above	65.2%
Below high school	34.8%
Occupation	
White collar	45.1%
Blue collar	54.9%
Income (USD/month)	
< 1000	12.3%
1000-2000	35.7%
2000-3000	28.9%
> 3000	23.1%
Health insurance	
Yes	89.4%
No	10.6%
Comorbidities	
Hypertension	42.1%
Diabetes	18.5%
Cholesterol	31.2%
Smoking status	
Current smoker	15.3%
Former smoker	22.7%
Non-smoker	62.0%
Alcohol consumption	
Regular	8.9%
Occasional	25.4%
Never	65.7%

The QAM signal will now be described in a common 4x4 or 16 state constellation referring to the first quadrant of a

space diagram in FIG. 3. The output signal of the modulator 4 is expressed by a sum vector of two, $A\cos 2\pi fct$ and $B\cos 2\pi fct$, vectors 81 and 82 which respectively represent the two 90°-out-of-phase carriers. When the distal point of a sum vector from the zero point represents a signal point, the 16 QAM signal has 16 signal points determined by a combination of four horizontal amplitude values a_1, a_2, a_3 , and a_4 and four vertical amplitude values b_1, b_2, b_3 , and b_4 . The first quadrant in FIG. 3 contains signal points 83 at c_{11} , 84 at c_{12} , 85 at c_{22} , and 86 at c_{21} .

c_{11} is a sum vector of a vector $0-a_1$ and a vector $0-b_1$ and thus, expressed as $c_{11}=a_1\cos 2\pi fct-b_1\sin 2\pi fct=A\cos (2\pi fct+\pi/2)$.

It is now assumed that the distance between 0 and a_1 in the orthogonal coordinates of FIG. 3 is A_1 , between a_1 and a_2 is A_2 , between 0 and b_1 is B_1 , and between b_1 and b_2 is B_2 .

As shown in FIG. 4, the 16 signal points are allocated in a vector coordinate, in which each point represents a four-bit pattern thus to allow the transmission of four bit data per period or time slot.

FIG. 5 illustrates a common assignment of two-bit patterns to the 16 signal points.

When the distance between two adjacent signal points is great, it will be identified by the receiver with much ease. Hence, it is desirable to space the signal points at greater intervals. If two particular signal points are allocated near to each other, they are rarely distinguished the error rate will be increased. Therefore, it is most preferable to have the signal points spaced at equal intervals as shown in FIG. 5, in which the 16 QAM signal is defined by $A_1=A_2/2$.

The transmitter 1 of the embodiment is arranged to divide an input digital signal into a first, a second, and a third data or bit stream. The 16 signal points or groups of signal points are divided into four groups. Then, 4 two-bit patterns of the first data stream are assigned to the four signal point groups respectively, as shown in FIG. 6. More particularly, when the two-bit pattern of the first data stream is 11, one of four signal points of the first signal point group 91 in the first quadrant is selected depending on the content of the second data stream for transmission. Similarly, when 01, one signal point of the second signal point group 92 in the second quadrant is selected and transmitted. When 00, one signal point of the third signal point group 93 in the third quadrant is transmitted and when 10, one signal point of the fourth signal point group 94 in the fourth quadrant is transmitted. Also, 4 two-bit patterns in the second data stream of the 16 QAM signal, or e.g. 16 four-bit patterns in the second data stream of a 64-state QAM signal, are assigned to four signal points or sub signal point groups of each of the four signal point groups 91, 92, 93, and 94 respectively, as shown in FIG. 7. It should be understood that the assignment is symmetrical between any two quadrants. The assignment of the signal points to the four groups 91, 92, 93, and 94 is determined by priority to the two-bit data of the first data stream. As the result, two-bit data of the first data stream and two-bit data of the second data stream can be transmitted independently. Also, the first data stream will be demodulated using a common 4 PSK receiver having a given antenna sensitivity. If the antenna sensitivity is higher, a modified type of the 16 QAM receiver of the present invention will intercept and demodulate both the first and second data stream with equal success.

FIG. 8 shows an example of the assignment of the first and second data streams in two-bit patterns.

When the low frequency band component of an HDTV video signal is assigned to the first data stream and the high

It is known that the four signal points are allocated at equal distances for achieving optimum energy utilization. FIG. 18 illustrates an example where the four signal points 125, 126, 127, and 128 represent 4 two-bit patterns, 11, 01, 00, and 10

respectively. It is also desirable for successful data transfer from the digital transmitter 51 to the first receiver 23 that the 4 PSK signal from the digital transmitter 51 has an amplitude of not less than a given level. More specifically, when the minimum amplitude of the 4 PSK signal needed for transmission from the digital transmitter 51 to the first receiver 23 of 4 PSK mode, or the distance between 0 and a_1 in FIG. 18 is A_{T0} , the first receiver 23 must successfully intercept any 4 PSK signal having an amplitude of more than A_{T0} .

The first receiver 23 is arranged to receive at its small-diameter antenna 22 a desired or 4 PSK signal which is transmitted from the transmitter 1 or digital transmitter 51 respectively through the transponder 12 of the satellite 10 and demodulate it with the demodulator 24. In more detail, the first receiver 23 is substantially designed for interception of a digital TV or data communications signal of 4 PSK or 2 PSK mode.

FIG. 19 is a block diagram of the first receiver 23 in which an input signal received by the antenna 22 from the satellite 12 is fed through the input unit 24 to a carrier reproducing circuit 131 where a carrier wave is demodulated and to a $\pi/2$ phase shifter 132 where a 90° phase carrier wave is demodulated. Also, two 90° -out-of-phase components of the input signal are respectively detected by a first phase detector circuit 133 and a second phase detector circuit 134 and are respectively transferred to first 136 and second discrimination/demodulation circuits 136 and 137. Two demodulated components from their respective discrimination/demodulation circuits 136 and 137, which have separately been discriminated at units of time slot by means of timing signals from a timing wave extracting circuit 135, are fed to a first data stream reproducing unit 232 where they are combined into a first data stream signal which is then delivered as an output from the output unit 26.

The input signal to the first receiver 23 will now be explained in more detail referring to the vector diagram of FIG. 20. The 4 PSK signal received by the first receiver 23 from the digital transmitter 51 is expressed in an ideal form without transmission distortion and noise, using four signal points 151, 152, 153, and 154, as shown in FIG. 20.

In practice, the real four signal points appear in particular extended areas about the ideal signal positions 151, 152, 153, and 154 respectively due to noise, amplitude distortion, and phase error developed during transmission. If one signal point is unfavorably displaced from its original position, it will hardly be distinguished from its neighboring signal point and the error rate will thus be increased. As the error rate increases to a critical level, the reproduction of data becomes less accurate. For enabling the data reproduction at a maximum acceptable level of the error rate, the distance between any two signal points should be far enough to be distinguished from each other. If the distance is $1A_{R0}$, the signal point 151 of a 4 PSK signal close to a critical error level has to stay in a first discrimination area 155 denoted by the hatching of FIG. 20 and determined by $|0-a_{R1}| > A_{R0}$ and $|0-b_{R1}| > A_{R0}$. This allows the signal transmission system to reproduce carrier waves and thus, demodulate a wanted signal. When the minimum radius of the antenna 22 is set to r_0 , the transmission signal of more than a given level can be intercepted by any receiver of the system. The amplitude of a 4 PSK signal of the digital transmitter 51 shown in FIG. 18 is minimum at A_{T0} and thus, the minimum amplitude A_{R0} of a 4 PSK signal to be received by the first receiver 23 is determined to be equal to A_{T0} . As a result, the first receiver 23 can intercept and demodulate the 4 PSK signal from the digital transmitter 51 at the maximum acceptable level of the

error rate when the radius of the antenna 22 is more than r_0 . If the transmission signal is of a modified 16- or 64-state QAM mode, the first receiver 23 may find it difficult to reproduce its carrier wave. For compensation, the signal points are increased to eight which are allocated at angles of $(\pi/4 + n\pi/2)$ as shown in FIG. 25(a) and its carrier wave will be reproduced by a 16x multiplication technique. Also, if the signal points are assigned to 16 locations at angles of $n\pi/8$ as shown in FIG. 25(b), the carrier of a quasi 4 PSK mode 16 QAM modulated signal can be reproduced with the carrier reproducing circuit 131 which is modified for performing 16x frequency multiplication. At the time, the signal points in the transmitter 1 should be arranged to satisfy $A_1/(A_1+A_2)=\tan(\pi/8)$.

Here, a case of receiving a QPSK signal will be considered. Similarly to the manner performed by the signal point setting circuit 67 in the transmitter shown in FIG. 2, it is also possible to modulate the positions of the signal points of the QPSK signal shown in FIG. 18 (amplitude-modulation, pulse-modulation, or the like). In this case, the signal point demodulating unit 138 in the first receiver 23 demodulates the position modulated or position changed signal. The demodulated signal is outputted together with the first data stream.

The 16 PSK signal of the transmitter 1 will now be explained referring to the vector diagram of FIG. 9. When the horizontal vector distance A_1 of the signal point 83 is greater than A_{T0} of the minimum amplitude of the 4 PSK signal of the digital transmitter 51, the four signal points 83, 84, 85, and 86 in the first quadrant of FIG. 9 stay in the shaded or first 4 PSK signal receivable area 87. When received by the first receiver 23, the four points of the signal appear in the first discriminating area of the vector field shown in FIG. 20. Hence, any of the signal points 83, 84, 85, and 86 of FIG. 9 can be translated into the signal level 151 of FIG. 20 by the first receiver 23 so that the two-bit pattern of 11 is assigned to a corresponding time slot. The two-bit pattern of 11 is identical to 11 of the first signal point group 91 or first data stream of a signal from the transmitter 1. Equally, the first data stream will be reproduced at the second, third, or fourth quadrant. As the result, the first receiver 23 reproduces two-bit data of the first data stream out of the plurality of data streams in a 16-, 32-, or 64-state QAM signal transmitted from the transmitter 1. The second and third data streams are contained in four segments of the signal point group 91 and thus, will not affect the demodulation of the first data stream. They may however affect the reproduction of a carrier wave and an adjustment, described later, will be needed.

If the transponder of a satellite supplies an abundance of energy, the forgoing technique of 16 to 64-state QAM mode transmission will be feasible. However, the transponder of the satellite in any existing satellite transmission system is strictly limited in the power supply due to its compact size and the capability of solar batteries. If the transponder or satellite is increased in size and thus weight, its launching cost will soar. This disadvantage will rarely be eliminated by traditional techniques unless the cost of launching a satellite rocket is reduced by a considerable level. In the existing system, a common communications satellite provides as low as 20 W of power and a common broadcast satellite offers 100 W to 200 W at best. For transmission of such a 4 PSK signal in the symmetrical 16-state QAM mode as shown in FIG. 9, the minimum signal point distance is needed $3A_{T0}$ as the 16 QAM amplitude is expressed by $2A_1=A_2$. Thus, the energy needed for the purpose is nine times greater than that for transmission of a common 4 PSK signal, in order to

In particular, n_{16} is expressed by $((A_1 + A_2)/A_1)^2$ which is the minimum energy for transmission of 4 PSK data. As the

signal point distance suited for modified 16 QAM interception is A_2 . The signal point distance for 4 PSK interception is $2A_1$, and the signal point distance ratio is $A_2/2A_1$, the antenna radius r_2 is determined as shown in FIG. 11, in which the curve 101 represents the relationship between the transmitting energy ratio n_{16} and the radius r_2 of the antenna 22 of the second receiver 23.

Also, the point 102 indicates transmission of common 16 QAM at the equal distance signal state mode where the transmitting energy is nine times greater and thus will no more be practical. As apparent from the graph of FIG. 11, the antenna radius r_2 of the second receiver 23 cannot be reduced further even if n_{16} is increased more than 5 times.

The transmitting energy at the satellite is limited to a small value and thus, n_{16} preferably stays not more than 5 times the value, as denoted by the hatching of FIG. 11. The point 104 within the hatching area 103 indicates, for example, that the antenna radius r_2 of a two times greater value is matched with a 4x value of the transmitting energy. Also, the point 105 represents that the transmission energy should be doubled when r_2 is about 5x greater. Those values are all within a feasible range.

The value of n_{16} not greater than 5x value is expressed using A_1 and A_2 as:

$$n_{16} = ((A_1 + A_2)/A_1)^2 < 5$$

Hence, $A_2 < 1.23A_1$.

If the distance between any two signal point group segments shown in FIG. 10 is $2A(4)$ and the maximum amplitude is $2A(16)$, $A(4)$ and $A(16)-A(4)$ are proportional to A_1 and A_2 respectively. Hence, $(A(16))^2 < 5(A(4))^2$ is established.

The action of a modified 64 ASPK transmission will be described as the third receiver 43 can perform 64-state QAM demodulation.

FIG. 12 is a vector diagram in which each signal point group segment contains 16 signal points as compared with 4 signal points of FIG. 10. The first signal point group segment 91 in FIG. 12 has a 4x4 matrix of 16 signal points allocated at equal intervals including the point 170. For providing compatibility with 4 PSK, $A_1 > A_{70}$ has to be satisfied. If the radius of the antenna 42 of the third receiver 43 is r_3 and the transmitting energy is n_{64} , the equation is expressed as:

$$r_3^2 = \{6^2(n-1)\}r_1^2$$

This relationship between r^3 and n of a 64 QAM signal is also shown in the graphic representation of FIG. 13.

It is understood that the signal point assignment shown in FIG. 12 allows the second receiver 33 to demodulate only two-bit patterns of 4 PSK data. Hence, it is desirable for compatibility between the first, second, and third receivers that the second receiver 33 is capable of demodulating a modified 16 QAM form from the 64 QAM modulated signal.

The compatibility between the three discrete receivers can be implemented by three-level grouping of signal points, as illustrated in FIG. 14. A description follows referring to the first quadrant in which the first signal point group segment 91 represents the two-bit pattern 11 of the first data stream.

In particular, a first sub segment 181 in the first signal point group segment 91 is assigned the two-bit pattern 11 of the second data stream. Equally, a second 182, a third 183, and a fourth sub segment 184 are assigned 01, 00, and 10 of the same respectively. This assignment is identical to that shown in FIG. 7.

The signal point allocation of the third data stream will now be explained referring to the vector diagram of FIG. 15 which shows the first quadrant. As shown, the four signal points 201, 205, 209, and 213 represent the two-bit pattern of 11, the signal points 202, 206, 210, and 214 represent 01, the signal points 203, 207, 211, and 215 represent 00, and signal points 204, 208, 212, and 216 represent 10. Accordingly, the two-bit patterns of the third data stream can be transmitted separately of the first and second data streams. In other words, two-bit data of the three different signal levels can be transmitted respectively.

As understood, the present invention permits not only transmission of six-bit data but also interception of three, two-bit, four-bit, and six-bit, different bit length data with their respective receivers while the signal compatibility remains between these levels.

The signal point allocation for providing compatibility between the three levels will be described.

As shown in FIG. 15, $A_1 > A_{70}$ is essential for allowing the first receiver 23 to receive the first data stream.

It is necessary to space any two signal points from each other by such a distance that the sub segment signal points, e.g. 182, 183, 184, of the second data stream shown in FIG. 15 can be distinguished from the signal point 91 shown in FIG. 10.

FIG. 15 shows that they are spaced by $\frac{1}{2}A_2$. In this case, the distance between the two signal points 201 and 202 in the first sub segment 181 is $A_2/6$. The transmitting energy needed for signal interception with the third receiver 43 is now calculated. If the radius of the antenna 32 is r_3 and the needed transmitting energy is n_{64} times the 4 PSK transmitting energy, the equation is expressed as:

$$R_3^2(12r_1)^2/(n-1)$$

This relationship is also denoted by the curve 211 in FIG. 16. For example, if the transmitting energy is 6 or 9 times greater than that for 4 PSK transmission at the point 223 or 222, the antenna 32 having a radius of 8x or 6x value respectively can intercept the first, second, and third data streams for demodulation. As the signal point distance of the second data stream is close to $\frac{1}{2}A_2$, the relationship between r_1 and r_2 is expressed by:

$$R_2 = (3r_1)^2/(n-1)$$

Therefore, the antenna 32 of the second receiver 33 has to be slightly increased in radius as denoted by the curve 223.

As understood, while the first and second data streams are transmitted through a traditional satellite which provides a small signal transmitting energy, the third data stream can also be transmitted through a future satellite which provides a greater signal transmitting energy without interrupting the action of the first and second receivers 23 or 33 or with no need of modification of the same and thus, both the compatibility and the advancement is ensured.

The signal receiving action of the second receiver 33 will first be described. As compared with the first receiver 23 arranged for interception with a small radius r_1 antenna and demodulation of the 4 PSK modulated signal of the digital transmitter 51 or the first data stream of the signal of the transmitter 1, the second receiver 33 is adopted for perfectly demodulating the 16 signal state two-bit data, shown in FIG. 10, or second data stream of the 16 QAM signal from the transmitter 1. In total, four-bit data including also the first data stream can be demodulated. The ratio between A_1 and

A_2 is however different in the two transmitters. The two different data are loaded to a demodulation controller 231 of the second receiver 33, shown in FIG. 21, which in turn supplies their respective threshold values to the demodulating circuit for AM demodulation.

The block diagram of the second receiver 33 in FIG. 21 is similar in basic construction to that of the first receiver 23 shown in FIG. 19. The difference is that the radius r_2 of the antenna 32 is greater than r_1 of the antenna 22. This allows the second receiver 33 to identify a signal component involving a smaller signal point distance. The demodulator 35 of the second receiver 33 also contains first and second data stream reproducing units 232 and 233 in addition to the demodulation controller 231. There is provided a first discrimination/demodulation circuit 136 for AM demodulation of modified 16 QAM signals. As understood, each carrier is a four-bit signal having two, positive and negative, threshold values about the zero level. As apparent from the vector diagram, of FIG. 22, the threshold values are varied depending on the transmitting energy of a transmitter since the transmitting signal of the embodiment is a modified 16 QAM signal. When the reference threshold is TH_{16} , it is determined by, as shown in FIG. 22:

$$TH_{16} = (A_1 + A_2/2)/(A_1 + A_2)$$

The various data for demodulation including A_1 and A_2 or TH_{16} , and the value m for multiple-bit modulation are also transmitted from the transmitter 1 as carried in the first data stream. The demodulation controller 231 may be arranged for recovering such demodulation data through statistical process of the received signal.

A way of determining the shift factor A_1/A_2 will be described with reference to FIG. 26. A change of the shift factor A_1/A_2 causes a change of the threshold value. Increase of a difference of a value of A_1/A_2 set at the receiver side from a value of A_1/A_2 set at the transmitter side will increase the error rate. Referring to FIG. 26, the demodulated signal from the second data stream reproducing unit 233 may be fed back to the demodulation controller 231 to change the shift factor A_1/A_2 in a direction to increase the error rate. By this arrangement, the third receiver 43 may not demodulate the shift factor A_1/A_2 , so that the circuit construction can be simplified. Further, the transmitter may not transmit the shift factor A_1/A_2 , so that the transmission capacity can be increased. This technique can be applied also to the second receiver 33.

FIGS. 25(a) and 25(b) are views showing signal point allocations for the C-CDM signal points, wherein signal points are added by shifting in the polar coordinate direction (r, θ). The previously described C-CDM is characterized in that the signal points are shifted in the rectangular coordinate direction, i.e. XY direction; therefore it is referred to as rectangular coordinate system C-CDM. Meanwhile, this C-CDM characterized by the shifting of signal points in the polar coordinate direction, i.e. r, θ direction, is referred to as polar coordinate system C-CDM.

FIG. 25(a) shows the signal allocation of 8PS-APSK signals, wherein four signal points are added by shifting each of 4 QPSK signals in the radius r direction of the polar coordinate system. In this manner, the APSK of polar coordinate system C-CDM having 8 signal points is obtained from the QPSK as shown in FIG. 25(a). As the pole is shifted in the polar coordinate system to add signal points in this APSK, it is referred to as shifted pole-APSK, i.e. SP-APSK in the abbreviated form. In this case, coordinate values of the newly added four QPSK signals 85 are

specified by using a shift factor S_1 as shown in FIG. 139. Namely, 8PS-APSK signal points includes ordinary QPSK signal points 83 (r_0, θ_0) and a signal point $((S_1+1)(r_0, \theta_0)$ obtained by shifting the signal point 83 in the radius r direction by an amount of $S_1 r_0$. Thus, a 1-bit subchannel 2 is obtained in addition to a 2-bit subchannel 1 identical with the QPSK.

Furthermore, as shown in the constellation diagram of FIG. 140, new eight signal points, represented by coordinates $(r_0+S_2 r_0, \theta_0)$ and $(r_0+S_1 r_0+S_2 r_0, \theta_0)$, can be added by shifting the eight signal points (r_0, θ_0) and $(r_0+S_1 r_0, \theta_0)$ in the radius r direction. As this allows two kinds of allocations, a 1-bit subchannel is obtained and is referred to as 16PS-APSK which provides the 2-bit subchannel 1, 1-bit subchannel 2, and 1-bit subchannel 3. As the 16PS-APSK disposes the signal points on the lines of $\theta=\frac{1}{4}(2n+1)\pi$, it allows the ordinary QPSK receiver explained with reference to FIG. 19 to reproduce the carrier wave to demodulate the first 2-bit subchannel although the second subchannel cannot be demodulated. As described above, the C-CDM method of shifting the signal points in the polar coordinate direction is useful in expanding the capacity of information data transmission while assuring compatibility to the PSK, especially to the QPSK receiver, a main receiver for the present satellite broadcast service. Therefore, without losing the first generation viewers of the satellite broadcast service based on the PSK, the broadcast service will advance to a second generation stage wherein the APSK will be used to increase transmittable information amount by use of the multi-level modulation while maintaining compatibility.

In FIG. 25(b), the signal points are allocated on the lines of $\theta=\pi/8$. With this arrangement, the 16 PSK signal points are reduced or limited to 12 signal points, i.e. 3 signal points in each quadrant. With this limitation, these three signal points in each quadrant are roughly regarded as one signal point for 4 QPSK signals. Therefore, this enables the QPSK receiver to reproduce the first subchannel in the same manner as in the previous embodiment.

More specifically, the signal points are disposed on the lines of $\theta=\pi/4$, $\theta=\pi/4+\pi/8$, and $\theta=\pi/4-\pi/8$. In other words, the added signals are offset by an amount $\pm\theta$ in the angular direction of the polar coordinate system from the QPSK signals disposed on the lines of $\theta=\pi/4$. Since all the signals are in the range of $\theta=\pi/4\pm\pi/8$, they can be regarded as one of the QPSK signal points on the line of $\theta=\pi/4$. Although the error rate is lowered a little bit in this case, the QPSK receiver 23 shown in FIG. 19 can discriminate these points as four signal points angularly allocated. Thus, 2-bit data can be reproduced.

In case of the angular shift C-CDM, if signal points are disposed on the lines of π/n , the carrier wave reproduction circuit can reproduce the carrier wave by the use of an n -multiplier circuit in the same manner as in other embodiments. If the signal points are not disposed on the lines of π/n , the carrier wave can be reproduced by transmitting several pieces of carrier information within a predetermined period in the same manner as in other embodiment. Assuming that an angle between two signal points of the QPSK or 8-SP-APSK is $2\theta_0$ in the polar coordinate system and a first angular shift factor is P_1 , two signal points $(r_0, \theta_0+P_1\theta_0)$ and $(r_0, \theta_0-P_1\theta_0)$ are obtained by shifting the QPSK signal point in the angular θ direction by an amount $\pm P_1\theta_0$. Thus, the number of signal points are doubled. Thus, the 1-bit subchannel 3 can be added and is referred to as 8-SP-PSK of $P=P_1$. If eight signal points are further added by shifting the 8-SP-PSK signals in the radius r direction by an amount $S_1 r_0$, it will become possible to obtain 16-SP-APSK (P, S_1

type) as shown in FIG. 142. The subchannels 1 and 2 can be reproduced by two 8PS-PSKs having the same phase. Returning to FIG. 25(b), as the C-CDM based on the angular shift in the polar coordinate system can be applied to the PSK as shown in FIG. 141, this will be adopted to the first generation satellite broadcast service. However, if adopted to the second generation satellite broadcasting based on the APSK, this polar coordinate system C-CDM is inferior in that signal points in the same group cannot be uniformly spaced as shown in FIG. 142. Accordingly, utilization efficiency of electrical power is worsened. On the other hand, the rectangular coordinate system C-CDM has good compatibility to the PSK.

The system shown in FIG. 25(b) is compatible with both the rectangular and polar coordinate systems. As the signal points are disposed on the angular lines of the 16 PSK, they can be demodulated by the 16 PSK. Furthermore, as the signal points are divided into groups, the QPSK receiver can be used for demodulation. Still further, as the signal points are also allocated to suit the rectangular coordinate system, the demodulation will be performed by the 16-SRQAM. Consequently, the compatibility between the rectangular coordinate system C-CDM and the polar coordinate system C-CDM can be assured in any of the QPSK, 16PSK, and 16-SRQAM.

The demodulation controller 231 has a memory 231a for storing therein different threshold values (i.e., the shift factors, the number of signal points, the synchronization rules, etc.) which correspond to different TV broadcast channels. When receiving one of the channels again, the values corresponding to the receiving channel will be read out of the memory to thereby stabilize the reception quickly.

If the demodulation data is lost, the demodulation of the second data stream will hardly be executed. This will be explained referring to a flowchart shown in FIG. 24.

Even if the demodulation data is not available, demodulation of the 4 PSK at Step 313 and of the first data stream at Step 301 can be implemented. At Step 302, the demodulation data retrieved by the first data stream reproducing unit 232 is transferred to the demodulation controller 231. If m is 4 or 2 at Step 303, the demodulation controller 231 triggers demodulation of 4 PSK or 2 PSK at Step 313. If not, the procedure moves to Step 310. At Step 305, two threshold values TH_8 and TH_{16} are calculated. The threshold value TH_{16} for AM demodulation is fed at Step 306 from the demodulation controller 231 to both the first 136 and the second discrimination/demodulation circuit 137. Hence, demodulation of the modified 16 QAM signal and reproduction of the second data stream can be carried out at Steps 307 and 315 respectively. At Step 308, the error rate is examined and if high, the procedure returns to Step 313 for repeating the 4 PSK demodulation.

As shown in FIG. 22 and the signal points 85, 83, are aligned on a line at an angle of $\cos(\omega t + n\pi/2)$ while 84 and 86 are off the line. Hence, the feedback of a second data stream transmitting carrier wave data from the second data stream reproducing unit 233 to a carrier reproducing circuit 131 is carried out so that no carrier needs to be extracted at the timing of the signal points 84 and 86.

The transmitter 1 is arranged to transmit carrier timing signals at intervals of a given time with the first data stream for the purpose of compensation for no demodulation of the second data stream. The carrier timing signal enables one to identify the signal points 83 and 85 of the first data stream regardless of demodulation of the second data stream. Hence, the reproduction of carrier wave can be triggered by the transmitting carrier data to the carrier reproducing circuit 131.

A determination then made at Step 304 of the flowchart of FIG. 24 as to whether or not m is 16 upon receipt of such a modified 64 QAM signal as shown in FIG. 23. At Step 310, a determination is also made as to whether or not m is more than 64. If it is determined at Step 311 that the received signal has no equal distance signal point constellation, the procedure goes to Step 312. The signal point distance TH_{64} of the modified 64 QAM signal is calculated from:

$$TH_{64} = (A_1 + A_2/2)/(A_1 + A_2)$$

This calculation is equivalent to that of TH_{16} but its resultant distance between signal points is smaller.

If the signal point distance in the first sub segment 181 is A_3 , the distance between the first 181 and the second sub segment 182 is expressed by $(A_2 - 2A_3)$. Then, the average distance is $(A_2 - 2A_3)/(A_1 + A_2)$ which is designated as d_{64} . when d_{64} is smaller than T_2 which represents the signal point discrimination capability of the second receiver 33, any two signal points in the segment will hardly be distinguished from each other. This judgement is executed at Step 313. If d_{64} is out of a permissive range, the procedure moves back to Step 313 for 4 PSK mode demodulation. If d_{64} is within the range, the procedure advances to Step 305 for allowing the demodulation of 16 QAM at Step 307. If it is determined at Step 308 that the error rate is too high, the procedure goes back to Step 313 for 4 PSK mode demodulation.

When the transmitter 1 supplied a modified 8 QAM signal such as shown in FIG. 25(a) in which all the signal points are at angles of $\cos(2\pi f + \pi/4)$, the carrier waves of the signal are lengthened to the same phase and will thus be reproduced with much ease. At the time, two-bit data of the first data stream are demodulated by the 4-PSK receiver while one-bit data of the second data stream is demodulated by the second receiver 33 and the total of three-bit data can be reproduced.

The third receiver 43 will be described in more detail. FIG. 26 shows a block diagram of the third receiver 43 similar to that of the second receiver 33 in FIG. 21. The difference is that a third data stream reproducing unit 234 is added and also, the discrimination/demodulation circuit has a capability of identifying eight-bit data. The antenna 42 of the third receiver 43 has a radius r_3 greater than r_2 , thus allowing smaller distance state signals, e.g. 32- or 64-state QAM signals, to be demodulated. For demodulation of the 64 QAM signal, the first discrimination/ reproduction circuit 136 has to identify 8 digital levels of the detected signal in which seven different threshold levels are involved. As one of the threshold values is zero, three are contained in the first quadrant.

FIG. 27 shows a space diagram of the signal in which the first quadrant contains three different threshold values.

As shown in FIG. 27, when the three normalized threshold values are $TH1_{64}$, $TH2_{64}$, and $TH3_{64}$ they are expressed by:

$$TH1_{64} = (A_1 + A_2/2)/(A_1 + A_2)$$

$$TH2_{64} = (A_1 + A_2/2)/(A_1 + A_2) \text{ and}$$

$$TH3_{64} = (A_1 + A_2 - A_3/2)/(A_1 + A_2)$$

Through AM demodulation of a phase detected signal using the three threshold values, the third data stream can be reproduced like the first and second data stream explained with FIG. 21. The third data stream contains e.g. four signal points 201, 202, 203, and 204 at the first sub segment 181

shown in FIG. 23 which represent 4 values of two-bit pattern. Hence, six digits or modified 64 QAM signals can be demodulated.

The demodulation controller 231 detects the value m , A_1 , A_2 , and A_3 from the demodulation data contained in the first data stream demodulated by the first data stream reproducing unit 232 and calculates the three threshold values $TH1_{64}$, $TH2_{64}$, and $TH3_{64}$ which are then fed to the first 136 and the second discrimination/demodulation circuit 137 so that the modified 64 QAM signal is demodulated with certainty. Also, if the demodulation data have been scrambled, the modified 64 QAM signal can be demodulated only with a specific or subscriber receiver. FIG. 28 is a flowchart showing the action of the demodulation controller 231 for modified 64 QAM signals. The difference from the flowchart for demodulation of 16 QAM shown in FIG. 24 will be explained. The procedure moves from Step 304 to Step 320 where it is determined whether or not $m=32$ or not. If $m=32$, demodulation of 32 QAM signals is executed at Step 322. If not, the procedure moves to Step 321 where it is determined whether or not $m=64$. If yes, A_3 is examined at Step 323. If A_3 is smaller than a predetermined value, the procedure moves to Step 305 and the same sequence as of FIG. 24 is implemented. If it is judged at Step 323 that A_3 is not smaller than the predetermined value, the procedure goes to Step 324 where the threshold values are calculated. At Step 325, the calculated threshold values are fed to the first and second discrimination/demodulation circuits and at Step 326, the demodulation of the modified 64 QAM signal is carried out. Then, the first, second, and third data streams are reproduced at Step 327. At Step 328, the error rate is examined. If the error rate is high, the procedure moves to Step 305 where the 16 QAM demodulation is repeated and if low, the demodulation of the 64 QAM is continued.

The action of carrier wave reproduction needed for execution of a satisfactory demodulating procedure will now be described. The scope of the present invention includes reproduction of the first data stream of a modified 16 or 64 QAM signal using a 4 PSK receiver. However, a common 4 PSK receiver rarely reconstructs carrier waves, thus failing to perform a correct demodulation. For compensation, some arrangements are necessary at both the transmitter and receiver sides.

Two techniques for compensation are provided according to the present invention. A first technique relates to transmission of signal points aligned at angles of $(2n-1)\pi/4$ at intervals of a given time. A second technique offers transmission of signal points arranged at intervals of an angle of $\pi/8$.

According to the first technique, the eight signal points including 83 and 85 are aligned at angles of $\pi/4$, $3\pi/4$, $5\pi/4$, and $7\pi/4$, as shown in FIG. 38. In action, at least one of the eight signal points is transmitted during sync time slot periods 452, 453, 454, and 455 arranged at equal intervals of time in a time slot gap 451 shown in the time chart of FIG. 38. Any desired signal points are transmitted during the other time slots. The transmitter 1 is also arranged to assign a data for the time slot interval to the sync timing data region 499 of a sync data block, as shown in FIG. 41.

The content of a transmitting signal will be explained in more detail referring to FIG. 41. The time slot group 451 containing the sync time slots 452, 453, 454, and 455 represents a unit data stream or block 491 carrying a data of D_n .

The sync time slots in the signal are arranged at equal intervals of a given time determined by the time slot interval or sync timing data. Hence, when the arrangement of the

sync time slots is detected, reproduction of carrier waves will be executed slot by slot through extracting the sync timing data from their respective time slots. Such a sync timing data S is contained in a sync block 493 at the front end of a data frame 492, which consists of a number of sync time slots denoted by the hatching in FIG. 41. Accordingly, the data to be extracted for carrier wave reproduction are increased, thus allowing the 4 PSK receiver to reproduce desired carrier waves at higher accuracy and efficiency.

The sync block 493 comprises sync data regions 496, 497, and 498, —containing sync data S_1 , S_2 , and S_3 , —respectively which include unique words and demodulation data. The phase sync signal assignment region 499 is at the end of the sync block 493, which holds a data of I_T including information about interval arrangement and assignment of the sync time slots.

The signal point data in the phase sync time slot has a particular phase and can thus be reproduced by the 4 PSK receiver. Accordingly, I_T in the phase sync signal assignment region 499 can be retrieved without error thus ensuring the reproduction of carrier waves at accuracy.

As shown in FIG. 41, the sync block 493 is followed by a demodulation data block 501 which contains demodulation data about threshold voltages needed for demodulation of the modified multiple-bit QAM signal. This data is essential for demodulation of the multiple-bit QAM signal and may preferably be contained in a region 502 which is a part of the sync block 493 for ease of retrieval.

FIG. 42 shows the assignment of signal data for transmission of burst form signals through a TDMA method.

The assignment is distinguished from that of FIG. 41 by the fact that a guard period 521 is inserted between any two adjacent D_n data blocks 491 and 491 for interruption of the signal transmission. Also, each data block 491 is at the front end of a sync region 522, the signal points at a phase of $(2n-1)\pi/4$ are only transmitted. Accordingly, the carrier wave reproduction will be feasible with the 4 PSK receiver. More specifically, the sync signal and carrier waves can be reproduced through the TDMA method.

The carrier wave reproduction of the first receiver 23 shown in FIG. 19 will be explained in more detail referring to FIGS. 43 and 44. As shown FIG. 43, an input signal is fed through the input unit 24 to a sync detector circuit 541 where it is sync detected. A demodulated signal from the sync detector 541 is transferred to an output circuit 542 for reproduction of the first data stream. A data of the phase sync signal assignment data region 499 (shown in FIG. 41) is retrieved by an extracting timing controller circuit 543 so that the timing of sync signals of $(2n-1)\pi/4$ data can be acknowledged and transferred as a phase sync control pulse 561 shown in FIG. 44 to a carrier reproduction controlling circuit 544. Also, the demodulated signal of the sync detector circuit 541 is fed to a frequency multiplier circuit 545 where it is $4\times$ multiplied prior to being transmitted to the carrier reproduction controlling circuit 544. The resultant signal denoted by 562 in FIG. 44 contains true phase data 563 and other data. As illustrated by 564 in the time chart 564 of FIG. 44, the phase sync time slots 452 carrying the $(2n-1)\pi/4$ data are also contained at equal intervals. In the carrier reproducing controlling circuit 544, the signal 562 is sampled by the phase sync control pulse 561 to produce a phase sample signal 565 which is then converted through a sample and hold operation into a phase signal 566. The phase signal 566 of the carrier reproduction controlling circuit 544 is fed through a loop filter 546 to a VCO 547 where its relevant carrier wave is reproduced. The reproduced carrier is then sent to the sync detector circuit 541.

In this manner, the signal point data of the $(2n-1)\pi/4$ phase denoted by the shaded areas in FIG. 39 is recovered and utilized so that a correct carrier wave can be reproduced by $4\times$ or $16\times$ frequency multiplication. Although a plurality of phases are reproduced at the time, the absolute phases of the carrier can be successfully be identified using a unique word assigned to the sync region 496 shown in FIG. 41.

For transmission of a modified 64 QAM signal such as shown in FIG. 40, signal points in the phase sync areas 471 at the $(2n-1)\pi/4$ phase denoted by the hatching are assigned to the sync time slots 452, 452b, etc. Its carrier can hardly be reproduced with a common 4 PSK receiver but can be successfully reproduced with the first receiver 23 of 4 PSK mode provided with the carrier reproducing circuit of the embodiment.

The foregoing carrier reproducing is of COSTAS type. A carrier reproducing circuit of the reverse modulation type will now be explained according to the embodiment.

FIG. 45 shows a reverse modulation type carrier reproducing circuit according to the present invention, in which a received signal is fed from the input unit 24 to a sync detector circuit 541 for producing a demodulated signal. Also, the input signal is delayed by a first delay circuit 591 to a delay signal. The delay signal is then transferred to a quadrature phase modulator circuit 592 where it is reverse demodulated by the demodulated signal from the sync detector circuit 541 to a carrier signal. The carrier signal is fed through a carrier reproduction controller circuit 544 to a phase comparator 593. A carrier wave produced by a VCO 547 is delayed by a second delay circuit 594 into a delay signal which is also fed to the phase comparator 593. At the phase comparator 593, the reverse demodulated carrier signal is compared in phase with the delay signal thus producing a phase difference signal. The phase difference signal is fed through a loop filter 546 to the VCO 547 which in turn produces a carrier wave arranged in phase with the received carrier wave. In the same manner as of the COSTAS carrier reproducing circuit shown in FIG. 43, an extracting timing controller circuit 543 performs sampling of signal points contained in the hatching areas of FIG. 39. Accordingly, the carrier wave of a 16 or 64 QAM signal can be reproduced with the 4 PSK demodulator of the first receiver 23.

The reproduction of a carrier wave by $16\times$ frequency multiplication will be explained. The transmitter 1 shown in FIG. 1 is arranged to modulate and transmit a modified 16 QAM signal with assignment of its signal points at $n\pi/8$ phase as shown in FIG. 46. At the first receiver 23 shown in FIG. 19, the carrier wave can be reproduced with its COSTAS carrier reproduction controller circuit containing a $16\times$ multiplier circuit 661 shown in FIG. 48. The signal points at each $n\pi/8$ phase shown in FIG. 46 are processed at the first quadrant by the action of the $16\times$ multiplier circuit 661, whereby the carrier will be reproduced by the combination of a loop filter 546 and a VCO 541. Also, the absolute phase may be determined from 16 different phases by assigning a unique word to the sync region.

The arrangement of the $16\times$ multiplier circuit will be explained referring to FIG. 48. A sum signal and a difference signal are produced from the demodulated signal by an adder circuit 662 and a subtractor circuit 663 respectively and then, multiplied together by a multiplier 664 into a $\cos 2\theta$ signal. Also, a multiplier 665 produces a $\sin 2\theta$ signal. The two signals are then multiplied by a multiplier 666 into a $\sin 4\theta$ signal.

Similarly, a $\sin 8\theta$ signal is produced from the two, $\sin 2\theta$ and $\cos 2\theta$, signals by the combination of an adder circuit

667, a subtractor circuit 668, and a multiplier 670. Furthermore, a $\sin 16\theta$ signal is produced by the combination of an adder circuit 671, a subtractor circuit 672, and a multiplier 673. Then, the $16\times$ multiplication is completed.

Through the foregoing $16\times$ multiplication, the carrier wave of all the signal points of the modified 16 QAM signal shown in FIG. 46 will successfully be reproduced without extracting particular signal points.

However, reproduction of the carrier wave of the modified 64 QAM signal shown in FIG. 47 can involve an increase in the error rate due to dislocation of some signal points from the sync areas 471.

Two techniques are known for compensation for the consequences. One is inhibiting transmission of the signal points dislocated from the sync areas. This causes the total amount of transmitted data to be reduced but allows the arrangement to be facilitated. The other is providing the sync time slots as described in FIG. 38. In more particular, the signal points in the $\pi/8$ sync phase areas, e.g. 471 and 471a, are transmitted during the period of the corresponding sync time slots in the time slot group 451. This triggers an accurate synchronizing action during the period thus minimizing phase error.

As now understood, the $16\times$ multiplication allows the simple 4 PSK receiver to reproduce the carrier wave of a modified 16 or 64 QAM signal. Also, the insertion of the sync time slots causes the phasic accuracy to be increased during the reproduction of carrier waves from a modified 64 QAM signal.

As set forth above, the signal transmission system of the present invention is capable of transmitting a plurality of data on a single carrier wave simultaneously in the multiple signal level arrangement.

More specifically, three different level receivers which have discrete characteristics of signal intercepting sensitivity and demodulating capability are provided in relation to one single transmitter so that any one of them can be selected depending on a wanted data size to be demodulated which is proportional to the price. When the first receiver of low resolution quality and low price is acquired together with a small antenna, its owner can intercept and reproduce the first data stream of a transmission signal. When the second receiver of medium resolution quality and medium price is acquired together with a medium antenna, its owner can intercept and reproduce both the first and second data streams of the signal. When the third receiver of high resolution quality and high price is acquired with a large antenna, its owner can intercept and reproduce all the first, second, and third data streams of the signal.

If the first receiver is a home-use digital satellite broadcast receiver of low price, it will overwhelmingly be welcome by a majority of viewers. The second receiver accompanied with the medium antenna costs more and will be accepted by not common viewers but particular people who want to enjoy HDTV services. The third receiver accompanied with the large antenna at least before the satellite output is increased, is not appropriate for home use and will possibly be used in relevant industries. For example, the third data stream carrying super HDTV signals is transmitted via a satellite to subscriber cinemas which can thus play video tapes rather than traditional movie films and run movies at low cost.

When the present invention is applied to a TV signal transmission service, three different quality pictures are carried on one signal channel wave and will offer compatibility with each other. Although the first embodiment refers to a 4 PSK, a modified 8 QAM, a modified 16 QAM, and a

modified 64 QAM signal, other signals will also be employed with equal success including a 32 QAM, a 256 QAM, an 8 PSK, and a 16 PSK, a 32 PSK signal. It would be understood that the present invention is not limited to a satellite transmission system and can be applied to a terrestrial communications system or a cable transmission system.

The transmission method of the invention can also be applied to a 4-level or 8-level ASK signal as shown in FIG. 58 and FIGS. 68(a) and (b), respectively.

EMBODIMENT 2

A second embodiment of the present invention is featured in which the physical multi-level arrangement of the first embodiment is divided into small levels through e.g. discrimination in error correction capability, thus forming a logic multi-level construction. In the first embodiment, each multi-level channel has different levels in the electrical signal amplitude or physical demodulating capability. The second embodiment offers different levels in the logic reproduction capability such as error correction. For example, the data D_1 in a multi-level channel is divided into two, $D_{1,1}$ and $D_{1,2}$, components and $D_{1,1}$ is more increased in the error correction capability than $D_{1,2}$ for discrimination. Accordingly, as the error detection and correction capability is different between $D_{1,1}$ and $D_{1,2}$ at demodulation, $D_{1,1}$ can successfully be reproduced within a given error rate when the C/N level of an original transmitting signal is as low as disabling the reproduction of $D_{1,2}$. This will be implemented using the logic multi-level arrangement.

More specifically, the logic multi-level arrangement consists of dividing data of a modulated multi-level channel and discriminating distances between error correction codes by mixing error correction codes with product codes for varying error correction capability. Hence, a more multi-level signal can be transmitted.

In fact, a $D_{1,1}$ channel is divided into two sub channels D_1 and $D_{1,2}$ and a D_2 channel is divided into two sub channels $D_{2,1}$ and $D_{2,2}$.

This will be explained in more detail referring to FIG. 87 in which $D_{1,1}$ is reproduced from a lowest C/N signal. If the C/N rate is d at minimum, three components $D_{1,2}$, $D_{2,1}$ and $D_{2,2}$ cannot be reproduced while $D_{1,1}$ is reproduced. If C/N is not less than c, $D_{1,2}$ can also be reproduced. Equally, when C/N is b, $D_{2,1}$ is reproduced and when C/N is a, $D_{2,2}$ is reproduced. As the C/N rate increases, the reproducible signal levels are increased in number. The lower the C/N, the fewer the reproducible signal levels. This will be explained in the form of relationship between transmitting distance and reproducible C/N value referring to FIG. 86. In common, the C/N value of a received signal is decreased in proportion to the distance of transmission as expressed by the real line 861 in FIG. 86. It is now assumed that the distance from a transmitter antenna to a receiver antenna is L_a when $C/N=a$, L_b when $C/N=b$, L_c when $C/N=c$, L_d when $C/N=d$, and L_e when $C/N=e$. If the distance from the transmitter antenna is greater than L_d , $D_{1,1}$ can be reproduced as shown in FIG. 85 where the receivable area 862 is denoted by the hatching. In other words, $D_{1,1}$ can be reproduced within a most extended area. Similarly, $D_{1,2}$ can be reproduced in an area 863 when the distance is not more than L_c . In this area 863 containing the area 862, $D_{1,1}$ can with no doubt be reproduced. In a small area 854, $D_{2,1}$ can be reproduced and in a smallest area 865, $D_{2,2}$ can be reproduced. As understood, the different data levels of a channel can be reproduced corresponding to degrees of declination in the C/N rate. The logic multi-level

The construction of the logic multi-level arrangement will be described in which there are provided two physical levels and two logic levels. FIG. 87 is a block diagram of a transmitter 1 which is substantially identical in construction to that shown in FIG. 2 and described previously in the first embodiment and will not be further explained in detail. The only difference is that error correction code encoders are added as abbreviated to ECC encoders. The divider circuit 3 has four outputs 1-1, 1-2, 2-1, and 2-2 through which four signals D_{1-1} , D_{1-2} , D_{2-1} , and D_{2-2} divided from an input signal are delivered. The two signals D_{1-1} and D_{1-2} are fed to two, main and sub, ECC encoders 872a and 873a of a first ECC encoder 871a respectively for converting to error correction code forms.

The reception of such a multi-level signal will be explained. FIG. 88 is a block diagram of a second receiver 33 which is almost identical in construction to that shown in FIG. 21 and described in the first embodiment. The second receiver 33 arranged for intercepting multi-level signals from the transmitter 1 shown in FIG. 87 further comprises first and second ECC decoder 876a 876b, in which the demodulation of QAM, or any of ASK, PSK, and FSK if desired, is executed.

Since D_{1-1} and D_{2-2} are higher in the error correction capability than D_{1-2} and D_{2-2} respectively, the error rate remains less than a given value although C/N is fairly low as shown in FIG. 85 and thus, an original signal will be reproduced successfully.

Using the logic multi-level arrangement of the present invention with a multi-level construction in which at least a part of the original signal is reproduced even if data in a higher level is lost, digital signal transmission will successfully be executed without losing the advantageous effect of

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 1.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	40 (80.0%)
Poor	10 (20.0%)
Comorbidities	
Hypertension	20 (40.0%)
Diabetes	10 (20.0%)
Cholesterol	15 (30.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Regular	5 (10.0%)
Occasional	15 (30.0%)
Never	30 (60.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 1.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	40 (80.0%)
Poor	10 (20.0%)
Comorbidities	
Hypertension	20 (40.0%)
Diabetes	10 (20.0%)
Cholesterol	15 (30.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Regular	5 (10.0%)
Occasional	15 (30.0%)
Never	30 (60.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 1.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	40 (80.0%)
Poor	10 (20.0%)
Comorbidities	
Hypertension	20 (40.0%)
Diabetes	10 (20.0%)
Cholesterol	15 (30.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Regular	5 (10.0%)
Occasional	15 (30.0%)
Never	30 (60.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 1.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	30 (60.0%)
Poor	20 (40.0%)
Comorbidities	
Hypertension	15 (30.0%)
Diabetes	10 (20.0%)
Cholesterol	12 (24.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Regular	5 (10.0%)
Occasional	15 (30.0%)
Never	30 (60.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 1.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	30 (60.0%)
Poor	20 (40.0%)
Comorbidities	
Hypertension	15 (30.0%)
Diabetes	10 (20.0%)
Cholesterol	12 (24.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Regular	5 (10.0%)
Occasional	15 (30.0%)
Never	30 (60.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 10.0
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 2.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	30 (60.0%)
Poor	20 (40.0%)
Comorbidities	
Hypertension	15 (30.0%)
Diabetes	10 (20.0%)
Cholesterol	12 (24.0%)
Arthritis	8 (16.0%)
Other	5 (10.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 10.0
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 2.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	30 (60.0%)
Poor	20 (40.0%)
Comorbidities	
Hypertension	15 (30.0%)
Diabetes	10 (20.0%)
Cholesterol	12 (24.0%)
Arthritis	8 (16.0%)
Other	5 (10.0%)
Medication	
Yes	25 (50.0%)
No	25 (50.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Yes	5 (10.0%)
No	45 (90.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 10.0
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 2.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	30 (60.0%)
Poor	20 (40.0%)
Comorbidities	
Hypertension	15 (30.0%)
Diabetes	10 (20.0%)
Cholesterol	12 (24.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Regular	5 (10.0%)
Occasional	15 (30.0%)
Never	30 (60.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 10.0
Gender	
Male	50 (50.0%)
Female	50 (50.0%)
Education (years)	12.0 ± 2.0
Marital status	
Married	40 (80.0%)
Single	10 (20.0%)
Occupation	
Retired	30 (60.0%)
Unemployed	20 (40.0%)
Income (USD/month)	1000.0 ± 200.0
Health status	
Good	30 (60.0%)
Poor	20 (40.0%)
Comorbidities	
Hypertension	15 (30.0%)
Diabetes	10 (20.0%)
Cholesterol	12 (24.0%)
Arthritis	8 (16.0%)
Other	5 (10.0%)
Medication	
Yes	25 (50.0%)
No	25 (50.0%)
Smoking status	
Smoker	10 (20.0%)
Non-smoker	40 (80.0%)
Alcohol consumption	
Yes	5 (10.0%)
No	45 (90.0%)

Table 1. Demographic characteristics of the study population	
Age (years)	65.0 ± 1.5
Gender	
Male	50.0%
Female	50.0%
Education (years)	12.0 ± 1.0
Marital status	
Married	60.0%
Single	40.0%
Occupation	
Retired	70.0%
Unemployed	30.0%
Income (USD/month)	1,200 ± 200
Health status	
Good	80.0%
Fair	20.0%
Poor	0.0%
Comorbidities	
Hypertension	45.0%
Diabetes	30.0%
Cholesterol	25.0%
Arthritis	15.0%
Depression	10.0%
Medication	
Yes	65.0%
No	35.0%
Smoking status	
Smoker	20.0%
Non-smoker	80.0%
Alcohol consumption	
Yes	15.0%
No	85.0%
Family size	3.0 ± 0.5
Living alone	10.0%
Living with family	90.0%
Transportation	
Own car	55.0%
Public transport	45.0%
Walking	0.0%
Wheelchair	0.0%
Assistance	
Yes	5.0%
No	95.0%
Health insurance	
Yes	90.0%
No	10.0%
Healthcare access	
Close to hospital	75.0%
Far from hospital	25.0%
Healthcare utilization	
Regular visits	60.0%
Irregular visits	40.0%
No visits	0.0%
Healthcare satisfaction	
Satisfied	70.0%
Dissatisfied	30.0%
Healthcare access barriers	
Cost	40.0%
Distance	30.0%
Time	20.0%
Information	10.0%
Transportation	0.0%
Healthcare quality	
Good	85.0%
Fair	15.0%
Poor	0.0%
Healthcare provider	
Physician	60.0%
Nurse	40.0%
Other	0.0%
Healthcare provider satisfaction	
Satisfied	75.0%
Dissatisfied	25.0%
Healthcare provider access	
Yes	90.0%
No	10.0%
Healthcare provider utilization	
Regular visits	65.0%
Irregular visits	35.0%
No visits	0.0%
Healthcare provider satisfaction	
Satisfied	80.0%
Dissatisfied	20.0%
Healthcare provider access barriers	
Cost	35.0%
Distance	25.0%
Time	15.0%
Information	10.0%
Transportation	15.0%
Healthcare quality	
Good	90.0%
Fair	10.0%
Poor	0.0%
Healthcare provider	
Physician	70.0%
Nurse	30.0%
Other	0.0%
Healthcare provider satisfaction	
Satisfied	85.0%
Dissatisfied	15.0%
Healthcare provider access	
Yes	95.0%
No	5.0%
Healthcare provider utilization	
Regular visits	70.0%
Irregular visits	30.0%
No visits	0.0%
Healthcare provider satisfaction	
Satisfied	90.0%
Dissatisfied	10.0%
Healthcare provider access barriers	
Cost	30.0%
Distance	20.0%
Time	10.0%
Information	10.0%
Transportation	30.0%
Healthcare quality	
Good	95.0%
Fair	5.0%
Poor	0.0%
Healthcare provider	
Physician	80.0%
Nurse	20.0%
Other	0.0%
Healthcare provider satisfaction	
Satisfied	95.0%
Dissatisfied	5.0%
Healthcare provider access	
Yes	100.0%
No	0.0%
Healthcare provider utilization	
Regular visits	80.0%
Irregular visits	20.0%
No visits	0.0%
Healthcare provider satisfaction	
Satisfied	100.0%
Dissatisfied	0.0%
Healthcare provider access barriers	
Cost	25.0%
Distance	15.0%
Time	5.0%
Information	10.0%
Transportation	45.0%
Healthcare quality	
Good	100.0%
Fair	0.0%
Poor	0.0%
Healthcare provider	
Physician	90.0%
Nurse	10.0%
Other	0.0%
Healthcare provider satisfaction	
Satisfied	100.0%
Dissatisfied	0.0%
Healthcare provider access	
Yes	100.0%
No	0.0%
Healthcare provider utilization	
Regular visits	90.0%
Irregular visits	10.0%
No visits	0.0%
Healthcare provider satisfaction	
Satisfied	100.0%
Dissatisfied	0.0%
Healthcare provider access barriers	
Cost	20.0%
Distance	10.0%
Time	5.0%
Information	10.0%
Transportation	55.0%
Healthcare quality	
Good	100.0%
Fair	

The first video encoder 401 will now be explained in more detail referring to the block diagram of FIG. 30. An input video signal of super high resolution is fed through the input unit 403 to the divider circuit 404 where it is divided into four components by sub-band coding process. In particular, the input video signal is separated by passing through a horizontal lowpass filter 451 and a horizontal highpass filter 452 of e.g. QAM mode to two, low and high, horizontal frequency components which are then subsampled into half of their quantities by two subsamplers 453 and 454 respectively. The low horizontal component is filtered by a vertical lowpass filter 455 and a vertical highpass filter 456 into a low horizontal low vertical component or H_LV_L signal and

The first video decoder 421 will now be explained in more detail referring to FIG. 31. The first data stream or D_1 signal of the first receiver 23 is fed through an input unit 501 to a descrambler 502 of the first video decoder 421 where it is descrambled. The descrambled D_1 signal is expanded by an expander 503 to $H_L V_L$ which is then fed to an aspect ratio changing circuit 504. Thus, the $H_L V_L$ signal can be delivered through an output unit 505 as a standard 500, letterbox format 507, wide-screen 508, or sidepanel format NTSC signal 509. The scanning format may be of non-interlace or interlace type and its NTSC mode lines may be 525 or doubled to 1050 by double tracing. When the received signal from the digital transmitter 51 is digital TV signal of 4 PSK mode, it can also be converted by the first receiver 23 and the first video decoder 421 to a TV picture. The second video decoder 422 will be explained in more detail referring to the block diagram of FIG. 32. The D_1 signal of the second receiver 33 is fed through a first input 521 to a first expander 522 for data expansion and then, transferred to an oversampler 523 where it is sampled at 2x. The oversampled signal is filtered by a vertical lowpass filter 524 into $H_L V_L$. Also, the D_2 signal of the second receiver 33 is fed through a second input 530 to a divider 531 where it is divided into three components which are then transferred to second, third, and fourth expanders 532-534 respectively for data expansion. The three expanded components are sampled at 2x by three oversamplers 535, 536, and 537 and filtered by a vertical highpass 538, a vertical lowpass 539, and a vertical highpass filter 540 respectively. Then, $H_L V_L$ from the vertical lowpass filter 524 and $H_L V_H$ from the vertical highpass filter 538 are summed by an adder 525, sampled by an oversampler 541, and filtered by a horizontal lowpass filter 542 into a low frequency horizontal video signal. $H_H V_L$ from the vertical lowpass filter 539 and $H_H V_H$ from the vertical highpass filter 540 are summed by an adder 526, sampled by an oversampler 544, and filtered by a horizontal highpass filter 545 to a high frequency horizontal video signal. The two, high and low frequency, horizontal video signals are then summed by an adder 543 into a high resolution video signal HD which is further transmitted through an output unit 546 as a video output 547 of e.g. HDTV format. If desired a traditional NTSC video output can be reconstructed with equal success.

FIG. 33 is a block diagram of the third video decoder 423 in which the D_1 and D_2 signals are fed through a first 521 and a second input 530 respectively to a high frequency band video decoder circuit 527 where they are converted to an HD signal in the same manner as described above. The D_3 signal is fed through a third input 551 to a super high frequency band video decoder circuit 552 where it is expanded, descrambled, and composed into $H_H V_H 2$ signal. The HD signal of the high frequency band video decoder circuit 527 and the $H_H V_H 2$ signal of the super high frequency band video decoder circuit 552 are summed by a summer 553 to a super high resolution TV or S-HD signal which is then delivered through an output unit 554 as super resolution video output 555.

The action of multiplexing in the multiplexer 412 shown in FIG. 29 will be explained in more detail. FIG. 34 illustrates a data assignment in which the three, first, second, and third, data streams D_1 , D_2 , D_3 contain in a period of T six NTSC channel data L1, L2, L3, L4, L5, L6, six HDTV channel data M1, M2, M3, M4, M5, M6 and six S-HDTV channel data H1, H2, H3, H4, H5, H6 respectively. In operation, the NTSC or D_1 signal data L1 to L6 are time multiplexed by TDM process during the period T. More particularly, $H_L V_L$ of D_1 is assigned to a domain 601 for the first channel. Then, a difference data M1 between HDTV and NTSC or a sum of $H_L V_H$, $H_H V_L$, and $H_H V_H 1$ is assigned to a domain 602 for the first channel. Also, a difference data H1 between HDTV and super HDTV or $H_H V_H 2$ (See FIG. 30) is assigned to a domain 603 for the first channel.

The selection of the first channel TV signal will now be described. When intercepted by the first receiver 23 with a small antenna coupled to the first video decoder 421, the first channel signal is converted to a standard or widescreen NTSC TV signal as shown in FIG. 31. When intercepted by the second receiver 33 with a medium antenna coupled to the second video decoder 422, the signal is converted by summing L1 of the first data stream D_1 assigned into the domain 601 and M1 of the second data stream D_2 assigned to the domain 602 to an HDTV signal of the first channel equivalent in program to the NTSC signal.

When intercepted by the third receiver 43 with a large antenna coupled to the third video decoder 423, the signal is converted by summing L1 of D_1 assigned to the domain 601, M1 of D_2 assigned to the domain 602, and H1 of D_3 assigned to the domain 603 into a super HDTV signal of the first channel equivalent in program to the NTSC signal. The other channel signals can be reproduced in an equal manner.

FIG. 35 shows another data assignment L1 of a first channel NTSC signal is assigned to a first domain 601. The domain 601 which is allocated at the front end of the first data stream D_1 , also contains at front a data S_{11} including a descrambling data and the demodulation data described in the first embodiment. A first channel HDTV signal is transmitted as L1 and M1. M1, which is thus a difference data between NTSC and HDTV, is assigned to two domains 602 and 611 of D_2 . If L1 is a compressed NTSC component of 6 Mbps, M1 is two times higher, that is, 12 Mbps. Hence, the total of L1 and M1 can be demodulated at 18 Mbps with the second receiver 33 and the second video decoder 423. According to current data compression techniques, HDTV compressed signals can be reproduced at about 15 Mbps. This allows the data assignment shown in FIG. 35 to enable simultaneous reproduction of an NTSC and HDTV first channel signal. However, this assignment allows no second channel HDTV signal to be carried. S21 is a descrambling data in the HDTV signal. A first channel super HDTV signal component comprises L1, M1, and H1. The difference data

H1 is assigned to three domains 603, 612, and 613 of D_3 . If the NTSC signal is 6 Mbps, the super HDTV is as high as 36 Mbps. When a compressed rate is increased, super HDTV video data of about 2000 scanning line for reproduction of a cinema size picture for commercial use can be transmitted in an equal manner.

FIG. 36 shows a further data assignment in which H1 of a super HDTV signal is assigned to six time domains. If a NTSC compressed signal is 6 Mbps, this assignment can be nine times higher, that is, 54 Mbps of D_3 data. Accordingly, super HDTV data of higher picture quality can be transmitted.

The foregoing data assignment makes the use of one of two, horizontal and vertical, polarization planes of a transmission wave. When both the horizontal and vertical polarization planes are used, the frequency utilization will be doubled. This will be explained below.

FIG. 49 shows a data assignment in which D_{V1} and D_{H1} are a vertical and a horizontal polarization signal of the first data stream respectively, D_{V2} and D_{H2} are a vertical and a horizontal polarization signal of the second data stream respectively, and D_{V3} and D_{H3} are a vertical and a horizontal polarization signal of the third data stream respectively. The vertical polarization signal D_{V1} of the first data stream carries a low frequency band or NTSC TV data and the horizontal polarization signal D_{H1} carries a high frequency band or HDTV data. When the first receiver 23 is equipped with a vertical polarization signal D_{H1} carries a high frequency band or HDTV data. When the first receiver 23 is equipped with an antenna for both horizontally and vertically polarized waves, it can reproduce the HDTV signal through summing L1 and M1. More specifically, the first receiver 23 can provide compatibility between NTSC and HDTV with the use of a particular type antenna.

FIG. 50 illustrates a TDMA method in which each data burst 721 is accompanied at front a sync data 731 and a card data 741. Also, a frame sync data 720 is provided at the front of a frame. Like channels are assigned to like time slots. For example, a first time slot 750 carries NTSC, HDTV, and super HDTV data of the first channel simultaneously. The six time slots 750, 750a, 750b, 750c, 750d, 750e, arranged independent from each other. Hence, each station can offer NTSC, HDTV, and/or super HDTV services independently of the other stations through selecting a particular channel of the time slots. Also, the first receiver 23 can reproduce an NTSC signal when equipped with a horizontal polarization antenna and both NTSC and HDTV signals when equipped with a compatible polarization antenna. In this respect, the second receiver 33 can reproduce a super HDTV at lower resolution while the third receiver 43 can reproduce a full super HDTV signal. According to the third embodiment, a compatible signal transmission system will be constructed. It is understood that the data assignment is not limited to the burst mode TDMA method shown in FIG. 50 and another method such as time division multiplexing of continuous signals as shown in FIG. 49 will be employed with equal success. Also, a data assignment shown in FIG. 51 will permit a HDTV signal to be reproduced at high resolution.

As set forth above, the compatible digital TV signal transmission system of the third embodiment can offer three, super HDTV, HDTV, and conventional NTSC, TV broadcast services simultaneously. In addition, a video signal intercepted by a commercial station or cinema can be electronized.

The modified QAM of the embodiments is now termed as SRQAM and its error rate will be examined.

First, the error rate in 16 SRQAM will be calculated. FIG. 99 shows a vector diagram of 16 SRQAM signal points. As apparent from the first quadrant, the 16 signal points of standard 16 QAM including 83a, 83b, 84a, 83a are allocated at equal intervals of 2δ .

The signal point 83a is spaced δ from both the I-axis and the Q-axis of the coordinate. It is now assumed that n is a shift value of the 16 SRQAM. In 16 SRQAM, the signal point 83a of 16 QAM is shifted to a signal point 83 where the distance from each axis is $n\delta$. The shift value n is thus expressed as:

$$0 < n < 3.$$

The other signal points 84a and 86a are also shifted to two points 84 and 86 respectively.

If the error rate of the first data stream is Pe_1 , it is obtained from:

$$\begin{aligned} Pe_{1-16} &= \frac{1}{4} \operatorname{erfc} \left(\frac{n\delta}{\sqrt{2\sigma}} \right) + \frac{1}{4} \operatorname{erfc} \left(\frac{3\delta}{\sqrt{2\sigma}} \right) \\ &= \frac{1}{8} \operatorname{erfc} \left(\frac{n\sqrt{p}}{\sqrt{9+n^2}} \right) \end{aligned}$$

Also, the error rate Pe_2 of the second data stream is obtained from:

$$\begin{aligned} Pe_{2-16} &= \frac{1}{2} \operatorname{erfc} \left(\frac{\frac{3-n}{2}\delta}{\sqrt{2\sigma}} \right) \\ &= \frac{1}{4} \operatorname{erfc} \left(\frac{\frac{3-n}{2}\delta}{2\sqrt{9+n^2}} \sqrt{p} \right) \end{aligned}$$

The error rate of 36 or 32 SRQAM will be calculated. FIG. 100 is a vector diagram of a 36 SRQAM signal in which the distance between any two 36 QAM signal points is 2δ .

The signal point 83a of 36 QAM is spaced δ from each axis of the coordinate. It is now assumed that n is a shift value of the 16 SRQAM. In 36 SRQAM, the signal point 83a is shifted to a signal point 83 where the distance from each axis is $n\delta$. Similarly, the nine 36 QAM signal points in the first quadrant are shifted to points 83, 84, 85, 86, 97, 98, 99, 100, 101 respectively. If a signal point group 90 comprising the nine signal points is regarded as a single signal point, the error rate Pe_1 in reproduction of only the first data stream D_1 with a modified 4 PSK receiver and the error rate Pe_2 in reproduction of the second data stream D_2 after discriminating the nine signal points of the group 90 from each other, are obtained respectively from:

$$\begin{aligned} Pe_{1-32} &= \frac{1}{6} \operatorname{erfc} \left(\frac{n\delta}{\sqrt{2\sigma}} \right) \\ &= \frac{1}{6} \operatorname{erfc} \left(\sqrt{\frac{6p}{5}} \times \frac{n}{\sqrt{n^2+2n+25}} \right) \end{aligned}$$

-continued

$$\begin{aligned}
 P_{e1-31} &= \frac{2}{3} \operatorname{erfc} \left(\frac{5-n}{4\sqrt{22}} \sqrt{\frac{\delta}{\rho}} \right) \\
 &= \frac{2}{3} \operatorname{erfc} \left(\sqrt{\frac{3\rho}{40}} \times \frac{5-n}{\sqrt{n^2+2n+25}} \right)
 \end{aligned}$$

FIG. 101 shows the relationship between error rate P_e and C/N rate in transmission in which the curve 900 represents a conventional or not modified 32 QAM signal. The straight line 905 represents a signal having $10^{-1.5}$ of the error rate. The curve 901a represents a D_1 level 32 SRQAM signal of the present invention at the shift rate n of 1.5. As shown, the C/N rate of the 32 SRQAM signal is 5 dB lower at the error rate of $10^{-1.5}$ than that of the conventional 32 QAM. This means that the present invention allows a D_1 signal to be reproduced at a given error rate when its C/N rate is relatively low.

The curve 902a represents a D_2 level SRQAM signal at $n=1.5$ which can be reproduced at the error rate of $10^{-1.5}$ only when its C/N rate is 2.5 dB higher than that of the conventional 32 QAM of the curve 900. Also, the curves 901b and 902b represent D_1 and D_2 SRQAM signals at $n=2.0$ respectively. The curves 902c represents a D_2 SRQAM signal at $n=2.5$. It is apparent that the C/N rate of the SRQAM signal at the error data of $10^{-1.5}$ is 5 dB, 8 dB, and 10 dB higher at $n=1.5$, 2.0, and 2.5 respectively in the D_1 level and 2.5 dB lower in the D_2 level than that of a common 32 QAM signal.

Shown in FIG. 103 is the C/N rate of the first and second data streams D_1 , D_2 of a 32 SRQAM signal which is needed for maintaining a constant error rate against variation of the shift n . As apparent, when the shift n is more than 0.8, there is developed a clear difference between two C/N rates of their respective D_1 and D_2 levels so that the multi-level signal, namely first and second data, transmission can be implemented successfully. In brief, $n > 0.85$ is essential for multi-level data transmission of the 32 SRQAM signal of the present invention.

FIG. 102 shows the relationship between the C/N rate and the error rate for 16 SRQAM signals. The curve 900 represents a common 16 QAM signal. The curves 901a, 901b, 901c and D_1 level or first data stream 16 SRQAM signals at $n=1.2$, 1.5, and 1.8 respectively. The curves 902a, 902b, 902c are D_2 level or second data stream 16 SRQAM signals at $n=1.2$, 1.5, and 1.8 respectively.

The C/N rate of the first and second data streams D_1 , D_2 of a 16 SRQAM signal is shown in FIG. 104, which is needed for maintaining a constant error rate against variation of the shift n . As apparent, when the shift n is more than 0.9 ($n > 0.9$), the multi-level data transmission of the 16 SRQAM signal will be executed.

One example of propagation of SRQAM signals of the present invention will now be described for use with a digital TV terrestrial broadcast service. FIG. 105 shows the relationship between the signal level and the distance between a transmitter antenna and a receiver antenna in the terrestrial broadcast service. The curve 911 represents a transmitted signal from the transmitter antenna which is 1250 feet high. It is assumed that the error rate essential for reproduction of an applicable digital TV signal is $10^{-1.5}$. The hatching area 912 represents a noise interruption. The point 910 represents a signal reception limit of a conventional 32 QAM signal at C/N=15 dB where the distance L is 60 miles and a digital HDTV signal can be intercepted at minimum.

The C/N rate varies 5 dB under a worst case receiving condition such as bad weather. If a change in the relevant

condition, e.g. weather, attenuates the C/N rate, the interception of an HDTV signal will hardly be ensured. Also, geographical conditions largely affect the propagation of signals and a decrease of about 10 dB at least will be unavoidable. Hence, successful signal interception within 60 miles will never be guaranteed and above all, a digital signal will be harder to propagate than an analogue signal. It would be understood that the service area of a conventional digital TV broadcast service is less dependable.

In case of the 32 SRQAM signal of the present invention or the 8-VSB shown in FIG. 68, three-level signal transmission system is constituted as shown in FIGS. 133 and 137. This permits a low resolution NTSC signal of MPEG level to be carried on the 1-1 data stream $D_{1,1}$, a medium resolution TV data of e.g. NTSC system to be carried on the 1-2 data stream $D_{1,2}$, and a high frequency component of HDTV data to be carried on the second data stream D_2 . Accordingly, the service area of the 1-2 data stream of the SRQAM signal is increased to a 70 mile point 910a while of the second data stream remains within a 55 mile point 910b, as shown in FIG. 105. FIG. 106 illustrates a computer simulation result of the service area of the 32 SRQAM signal of the present invention, which is similar to FIG. 53 but explains it in more detail. As shown, the regions 708, 703c, 703a, 703b, and 712 represent a conventional 32 QAM receivable area, a 1-1 data level $D_{1,1}$ receivable area, a 1-2 data level $D_{1,2}$ receivable area, a second data level D_2 receivable area, and a service area of a neighbor analogue TV station respectively. The conventional 32 QAM signal data used in this drawing is based on a conventionally disclosed one.

For common 32 QAM signal, the 60-mile-radius service area can be established theoretically. The signal level will however be attenuated by geographical or weather conditions and particularly, considerably declined at near the limit of the service area.

If the low frequency band TV component of MPEG1 grade is carried on the 1-1 level $D_{1,1}$ data and the medium frequency band TV component of NTSC grade on the 1-2 level $D_{1,2}$ data and high frequency band TV component of HDTV on the second level D_2 data, the service area of the 32 SRQAM signal of the present invention is increased by 10 miles in radius for reception of an EDTV signal of medium resolution grade and 18 miles for reception of an LDTV signal of low resolution grade although decreased by 5 miles for reception of an HDTV signal of high resolution grade, as shown in FIG. 106. FIG. 107 shows a service area in case of a shift factor n or $s=1.8$. FIG. 135 shows the service area of FIG. 107 in terms of area.

More particularly, the medium resolution component of a digital TV broadcast signal of the SRQAM mode of the present invention can successfully be intercepted in an unfavorable service region or shadow area where a conventional medium frequency band TV signal is hardly propagated and attenuated due to obstacles. Within at least the predetermined service area, the NTSC TV signal of the SRQAM mode can be intercepted by any traditional TV receiver. As the shadow or signal attenuating area developed by building structures and other obstacles or by interference of a neighbor analogue TV signal or produced in a low land is decreased to a minimum, TV viewers or subscribers will be increased in number.

Also, the HDTV service can be appreciated by only a few viewers who afford to have a set of high cost HDTV receiver and display, according to the conventional system. The system of the present invention allows a traditional NTSC, PAL, or SECAM receiver to intercept a medium resolution

component of the digital HDTV signal with the use of an additional digital tuner. A majority of TV viewers can hence enjoy the service, at less cost and will be increased in number. This will encourage the TV broadcast business and create an extra social benefit.

Furthermore, the signal receivable area for medium resolution or NTSC TV service according to the present invention is increased about 36% at $n=2.5$, as compared with the conventional system. As the service area thus the number of TV viewers is increased, the TV broadcast business enjoys an increasing profit. This reduces a risk in the development of a new digital TV business which will thus be encouraged to put into practice.

FIG. 107 shows the service area of a 32 SRQAM signal of the present invention in which the same effect will be ensured at $n=1.8$. Two service areas 703a and 703b, of D_1 and D_2 signals respectively can be determined in extension for optimum signal propagation by varying the shift n considering a profile of HDTV and NTSC receiver distribution or geographical features. Accordingly, TV viewers will satisfy the service and a supplier station will enjoy a maximum of viewers.

This advantage is given when:

$$n > 1.0$$

Hence, if the 32 SRQAM signal is selected, the shift n is determined by:

$$1 < n < 5$$

Also, if the 16 SRQAM signal is employed, n is determined by:

$$1 < n < 3$$

In the SRQAM mode signal terrestrial broadcast service in which the first and second data levels are created by shifting corresponding signal points as shown in FIGS. 99 and 100, the advantage of the present invention will be given when the shift n in a 16, 32, or 64 SRQAM signal is more than 1.0.

In the above embodiments, the low and high frequency band components of a video signal are transmitted as the first and second data streams. However, the transmitted signal may be an audio signal. In this case, low frequency or low resolution components of an audio signal may be transmitted as the first data stream, and high frequency or high resolution components of the audio signal may be transmitted as the second data stream. Accordingly, it is possible to receive high C/N portion in high sound quality, and low C/N portion in low sound quality. This can be utilized in PCM broadcast, radio, portable telephone and the like. In this case, the broadcasting area or communication distance can be expanded as compared with the conventional systems.

Furthermore, the third embodiment can incorporate a time division multiplexing (TDM) system as shown in FIG. 133. Utilization of the TDM makes it possible to increase the number of subchannels. An ECC encoder 743a and ECC encoder 743b, provided in two subchannels, differentiate ECC code gains so as to make a difference between thresholds of these two subchannels, whereby an increase in the number of channels of the multi-level signal transmission can be realized. In this case, it is also possible to provide the ECC encoder, such as two Trellis encoders 743a and 743b for VSB-ASK signals of 4 VSB, 8 VSB, 16 VSB as shown

in FIG. 137 and differentiate their code gains. The explanation of this block diagram is substantially identical to that of later described block diagram of FIG. 131 which shows the sixth embodiment of the present invention and, therefore, will not be described here.

FIG. 131 is a block diagram of the magnetic recording and reproducing apparatus, and FIG. 137 is a block diagram of the transmission apparatus.

The up converter of the transmitter and the down converter of the receiver of the transmission apparatus can be substituted for the magnetic head recording signal amplifier circuit and the magnetic head reproducing signal amplifier circuit of the magnetic recording and reproducing apparatus, respectively, and their respective components are therefore identically constructed. The configuration and operation of the modulator and demodulator of the magnetic recording and reproducing apparatus are therefore also identical to those of the transmission apparatus. Similarly, the recording/reproducing/transmission system shown in FIG. 84 is identical in construction to the transmission system shown in FIG. 156. To further simplify the system, the configuration shown in the block diagram of FIG. 157 can be used, or for even greater simplification the block diagram of FIG. 158 can be used.

In a simulation of FIG. 106, there is provided 5 dB difference of a coding gain between 1-1 subchannel $D_{1,1}$ and 1-2 subchannel $D_{1,2}$.

An SRQAM is the system applying a C-CDM (Constellation-Code Division Multiplex) of the present invention to a rectangle-QAM. A C-CDM, which is a multiplexing method independent of TDM or FDM, can obtain subchannels by dividing a constellation-code corresponding to a code. An increase of the number of codes will bring an expansion of transmission capacity, which is not attained by TDM or FDM alone, while maintaining almost perfect compatibility with conventional communication apparatus. Thus C-CDM can bring excellent effects.

Although above embodiment combines the C-CDM and the TDM, it is also possible to combine the C-CDM with the FDM (Frequency Division Multiplex) to obtain similar modulation effect of threshold values. Such a system can be used for a TV broadcasting, and FIGS. 108(a)-108(e) show a frequency distribution of a TV signal. A spectrum 725 represents a frequency distribution of a conventional analogue, e.g. NTSC, broadcasting signal. The largest signal is a video carrier 722. A color carrier 723 and a sound carrier 724 are not so large. There is known a method of using an FDM for dividing a digital broadcasting signal into two frequencies. In this case, a carrier is divided into a first carrier 726 and a second carrier 727 to transmit a first 720 and a second signal 721 respectively. Interference can be lowered by placing first and second carriers 726 and 727 sufficiently far from the video carrier 722. The first signal 720 serves to transmit a low resolution TV signal at a large output level, while the second signal 721 serves to transmit a high resolution TV signal at a small output level. Consequently, the multi-level signal transmission making use of an FDM can be realized without being bothered by obstruction.

FIG. 134 shows an example of a conventional method using a 32 QAM system. As the subchannel A has a larger output than the subchannel B, a threshold value for the subchannel A, i.e. a threshold 1, can be set small 4-5 dB than a threshold value for the subchannel B, i.e. a threshold 2. Accordingly, a two-level broadcasting having 4-5 dB threshold difference can be realized. In this case, however, a large reduction of signal reception amount will occur if the receiving signal level decreases below the threshold 2.

FIG. 110 shows a principle of the C-CDM. Furthermore, FIG. 111 shows a code assignment of the C-CDM equivalent to an expanded 16 QAM. FIG. 112 shows a code assignment of the C-CDM equivalent to an expanded 32 QAM. As shown in FIGS. 110 and 111, a 256 QAM signal is divided into four, 740a, 740b, 740c, and 740d, levels which have 4, 16, 64, and 256 segments, respectively. A signal code word 742d of 256 QAM on the fourth level 740d is "11111111" of 8 bits. This is split into four code words 741a, 741b, 741c, and 741d of 2-bits—i.e. "11", "11", "11", "11", which are then allocated on signal point regions 742a, 742b, 742c, and 742d of first, second, third, and fourth levels 740a, 740b,

740c, and 740d, respectively. As a result, subchannels 1, 2, 3, and 4 of 2 bits are created. This is termed C-CDM (Constellation-Code Division Multiplex). FIG. 111 shows a detailed code assignment of the C-CDM equivalent to expanded 16 QAM, and FIG. 112 shows a detailed code assignment of the C-CDM equivalent to expanded 32 QAM. As the C-CDM is an independent multiplexing method, it can be combined with the conventional FDM (Frequency Division Multiplex) or TDM (Time Division Multiplex) to further increase the number of subchannels. In this manner, the C-CDM method realizes a novel multiplexing system. Although the C-CDM is explained by using rectangular QAM, other modulation system having signal points, e.g. QAM, PSK, ASK, and even FSK if frequency regions are regarded as signal points, can be also used for this multiplexing in the same manner.

For example, the error rate of the subchannel 1 of 8PS-APSK, explained in the embodiment 1 with reference to FIG. 139, will be expressed as follows:

$$Pe_{1-8} = \frac{1}{4} \operatorname{erfc} \left(\frac{\delta}{\sqrt{2} \sigma} \right) + \frac{1}{4} \operatorname{erfc} \left(\frac{(S_1+1)\delta}{\sqrt{2} \sigma} \right)$$

The error rate of the subchannel 2 is expressed as follows:

$$Pe_{2-8} = \frac{1}{2} \operatorname{erfc} \left(\frac{S_1 \delta}{2\sigma} \right)$$

Furthermore, the error rate of the subchannel 1 of 16-PS-APSK (PS type), explained with reference to FIG. 142, will be expressed as follow:

$$Pe_{1-16} = \frac{1}{8} \operatorname{erfc} \left(\frac{\delta}{\sqrt{2} \sigma} \right) + \frac{1}{8} \operatorname{erfc} \left(\frac{(S_2+1)\delta}{\sqrt{2} \sigma} \right) + \frac{1}{8} \operatorname{erfc} \left(\frac{(S_1+1)\delta}{\sqrt{2} \sigma} \right) + \frac{1}{8} \operatorname{erfc} \left(\frac{(S_1+S_2+1)\delta}{\sqrt{2} \sigma} \right)$$

The error rate of the subchannel 2 is expressed as follows:

$$Pe_{2-16} = \frac{1}{4} \operatorname{erfc} \left(\frac{S_1 \delta}{2\sigma} \right) + \frac{1}{8} \operatorname{erfc} \left(\frac{(S_1-S_2)\delta}{2\sigma} \right) + \frac{1}{8} \operatorname{erfc} \left(\frac{(S_1+S_2)\delta}{2\sigma} \right)$$

The error rate of the subchannel 3 is expressed as follows:

$$Pe_{3-16} = \frac{1}{2} \operatorname{erfc} \left(\frac{S_2 \delta}{2\sigma} \right)$$

EMBODIMENT 4

A fourth embodiment of the present invention will be described referring to the relevant drawings.

FIG. 37 illustrates the entire arrangement of a signal transmission system of the fourth embodiment, which is arranged for terrestrial service and similar in both construction and action to that of the third embodiment shown in FIG. 29. The difference is that the transmitter antenna 6 is replaced by a terrestrial antenna 6a and the receiver antennas 22, 23, and 24 are also replaced by three terrestrial antennas 22a, 23a, and 24a. The action of the system is identical to that of the third embodiment and will not be explained in more detail. The terrestrial broadcast service unlike a satellite service depends much on the distance between the

transmitter antenna 6a to the receiver antennas 22a, 32a, and 42a. If a receiver is located far from the transmitter, the level of a received signal is low. Particularly, a common multi-level QAM signal can hardly be demodulated by the receiver which thus reproduces no TV program.

The signal transmission system of the present invention allows the first receiver 23 equipped with the antenna 22a, which is located at a far distance as shown in FIG. 37, to intercept a modified 16 or 64 QAM signal and demodulate at 4 PSK mode the first data stream or D_1 component of the received signal to an NTSC video signal so that a TV program picture of medium resolution can be displayed even if the level of the received signal is relatively low.

Also, the second receiver 33 with the antenna 32a is located at a medium distance from the antenna 6a and can thus intercept and demodulate both first and second data streams or D_1 and D_2 components of the modified 16 or 64 QAM signal to an HDTV video signal which in turn produces an HDTV program picture.

The third receiver 43 with the antenna 42a is located at a near distance and can intercept and demodulate the first, second, and third data streams or D_1 , D_2 , and D_3 components of the modified 16 or 64 QAM signal to a super HDTV video signal which in turn produces a super HDTV picture in quality to a common movie picture.

The assignment of frequencies is determined by the same manner as of the time division multiplexing shown in FIGS. 34, 35, and 36. Like FIG. 34, when the frequencies are assigned to first to sixth channels, L1 of the D_1 component carries an NTSC data of the first channel, M1 of the D_2 component carries an HDTV difference data of the first channel, and H1 of the D_3 component carries a super HDTV difference data of the first channel. Accordingly, NTSC, HDTV, and super HDTV data all can be carried on the same channel. If D_2 and D_3 of the other channels are utilized as shown in FIGS. 35 and 36, more data of HDTV and super HDTV respectively can be transmitted for higher resolution display.

As understood, the system allows three different but compatible digital TV signals to be carried on a single channel or using D_2 and D_3 regions of other channels. Also, the medium resolution TV picture data of each channel can be intercepted in a wider service area according to the present invention.

A variety of terrestrial digital TV broadcast systems employing a 16 QAM HDTV signal of 6 MHz bandwidth have been proposed. Those are however not compatible with the existing NTSC system and thus, have to be associated with a simulcast technique for transmitting NTSC signals of the same program on another channel. Also, such a common 16 QAM signal limits a service area. The terrestrial service system of the present invention allows a receiver located at a relatively far distance to intercept successfully a medium resolution TV signal with no use of an additional device nor an extra channel.

FIG. 52 shows an interference region of the service area 702 of a conventional terrestrial digital HDTV broadcast station 701. As shown, the service area 702 of the conventional HDTV station 701 intersects with the service area 712 of a neighboring analogue TV station 711. At the intersecting region 713, an HDTV signal is attenuated by signal interference from the analogue TV station 711 and will thus be intercepted with less consistency.

FIG. 53 shows an interference region associated with the multi-level signal transmission system of the present invention. The system is low in the energy utilization as compared

with a conventional system and its service area 703 for HDTV signal propagation is smaller than the area 702 of the conventional system. On the contrary, the service area 704 for digital NTSC or medium resolution TV signal propagation is larger than the conventional area 702. The level of signal interference from a digital TV station 701 of the system to a neighboring analogue TV station 711 is equivalent to that from a conventional digital TV station, such as shown in FIG. 52.

In the service area of the digital TV station 701, there are three interference regions developed by signal interference from the analogue TV station 711. Both HDTV and NTSC signals can hardly be intercepted in the first region 705. Although fairly interfered, an NTSC signal may be intercepted at an equal level in the second region 706 denoted by the left down hatching. The NTSC signal is carried on the first data stream which can be reproduced at a relatively low C/N rate and will thus be minimum affected when the C/N rate is declined by signal interference from the analogue TV station 711.

At the third region 707 denoted by the right down hatching, an HDTV signal can also be intercepted when signal interference is absent while the NTSC signal can constantly be intercepted at a low level.

Accordingly, the overall signal receivable area of the system will be increased although the service area of HDTV signals becomes a little bit smaller than that of the conventional system. Also, at the signal attenuating regions produced by interference from a neighboring analogue TV station, NTSC level signals of an HDTV program can successfully be intercepted as compared with the conventional system where no HDTV program is viewed in the same area. The system of the present invention much reduces the size of signal attenuating area and when increases the energy of signal transmission at a transmitter or transponder station, can extend the HDTV signal service area to an equal size to the conventional system. Also, NTSC level signals of a TV program can be intercepted more or less in a far distance area where no service is given by the conventional system or a signal interference area caused by an adjacent analogue TV station.

Although the embodiment employs a two-level signal transmission method, a three-level method such as shown in FIG. 78 will be used with equal success. If an HDTV signal is divided into three picture levels-HDTV, NTC, and low resolution NTSC, the service area shown in FIG. 53 will be increased from two levels to three levels where the signal propagation is extended radially and outwardly. Also, low resolution NTSC signals can be received at an acceptable level at the first signal interference region 705 where NTSC signals are hardly be intercepted in the two-level system. As understood, the signal interference is also involved from a digital TV station to an analogue TV station.

The description will now be continued, provided that no digital TV station should cause a signal interference to any neighboring analogue TV station. According to a novel system under consideration in U.S.A., no-use channels of the existing service channels are utilized for HDTV and thus, digital signals must not interfere with analogue signals. For the purpose, the transmitting level of a digital signal has to be decreased lower than that shown in FIG. 53. If the digital signal is of conventional 16 QAM or 4 PSK mode, its HDTV service area 708 becomes decreased as the signal interference region 713 is fairly large as shown in FIG. 54. This results in a less number of viewers and sponsors, whereby such a digital system will have much difficulty in operating as a profitable business.

FIG. 55 shows a similar result according to the system of the present invention. As apparent, the HDTV signal receivable 703 is a little bit smaller than the equal area 708 of the conventional system. However, the lower resolution or NTSC TV signal receivable area 704 will be increased as compared with the conventional system. The hatching area represents a region where the NTSC level signal of a program can be received while HDTV signal of the same is hardly intercepted. At the first interference region 705, both HDTV and NTSC signals cannot be intercepted due to signal interference from an analogue station 711.

When the level of signals is equal, the multi-level transmission system of the present invention provides a smaller HDTV service area and a greater NTSC service area for interception of an HDTV program at an NTSC signal level. Accordingly, the overall service area of each station is increased and more viewers can enjoy its TV broadcasting service. Furthermore, HDTV/NTSC compatible TV business can be operated with economical advantages and consistency. It is also intended that the level of a transmitting signal is increased when the control on averting signal interference to neighboring analogue TV stations is lessened corresponding to a sharp increase in the number of home-use digital receivers. Hence, the service area of HDTV signals will be increased and in this respect, the two different regions for interception of HDTV/NTSC and NTSC digital TV signal levels respectively, shown in FIG. 55, can be adjusted in proportion by varying the signal point distance in the first and/or second data stream. As the first data stream carries information about the signal point distance, a multi-level signal can be received with more certainty.

FIG. 56 illustrates signal interference between two digital TV stations in which a neighboring TV station 701a also provides a digital TV broadcast service, as compared with an analogue station in FIG. 52. Since the level of a transmitting signal becomes high, the HDTV service or high resolution TV signal receivable area 703 is increased to an extension equal to the service area 702 of an analogue TV system.

At the intersecting region 714 between two service areas of their respective stations, the received signal can be reproduced not to an HDTV level picture using a common directional antenna due to signal interference but to an NTSC level picture with a particular directional antenna directed towards a desired TV station. If a highly directional antenna is used, the received signal from a target station will be reproduced as an HDTV picture. The low resolution signal receivable area 704 is increased larger than the analogue TV system service area 702 and a pair of intersecting regions 715 and 716 developed by the two low resolution signal receivable areas 704 and 704a of their respective digital TV stations 701 and 701a permit the received signal from an antenna directed to one of the two stations to be reproduced as an NTSC level picture.

The HDTV service area of the multi-level signal transmission system of the present invention itself will be much increased when applicable signal restriction rules are withdrawn in a coming digital TV broadcast service maturity time.

At the time, the system of the present invention also provides as a wide HDTV signal receivable area as of the conventional system and particularly, allows its transmitting signal to be reproduced at an NTSC level in a further distance or intersecting areas where TV signals of the conventional system are hardly intercepted. Accordingly, signal attenuating or shadow regions in the service area will be minimized.

A fifth embodiment of the present invention resides in amplitude modulation or ASK procedure. FIG. 57 illustrates the assignment of signal points of a 4-level ASK signal, such as VSB signal, according to the fifth embodiment, in which four signal points are denoted by 721, 722, 723, and 724. FIG. 68(a) shows the constellation of 8-level VSB signal. The four-level transmission permits a 2-bit data to be transmitted in every cycle period where as the eight-level transmission permits a 4-bit data. It is assumed that the four signal points 721, 722, 723, and 724 in the case of 4 VSB represent two-bit patterns 00, 01, 10, and 11 respectively.

In FIG. 58, the constellation of 4-level ASK, such as 4-level VSB, is shown. For ease of four-level signal transmission of the embodiment, the two signal points 721 and 722 are designated as a first signal point group 725 and the other two signal points 723 and 724 are designated as a second signal point group 726. The distance between the two signal point groups 725 and 726 is then determined wider than that between any two adjacent signal points. More specifically, the distance L_0 between the two signals 722 and 723 is arranged wider than the distance L between the two adjacent points 721 and 722 or 723 and 724.

This is expressed as:

$$L_0 > L$$

Hence, the multi-level signal transmission system of the embodiment is based on $L_0 > L$. The embodiment is however not limited to $L_0 > L$, and $L_0 = L$ will be employed temporarily or permanently depending on the requirements of design, condition, and setting. In the case of VSB, the constellation shown in FIGS. 68(a) and (b) are taken.

The two signal point group are assigned one-bit patterns of the first data stream D_1 , as shown in FIG. 59(a). More particularly, a bit 0 of binary system is assigned to the first signal point group 725 and another bit 1 to the second signal point group 726. Then, a one-bit pattern of the second data stream D_2 is assigned to each signal point. For example, the two signal points 721 and 723 are assigned $D_2=0$ and the other two signal points 722 and 724 are assigned $D_2=1$.

The multi-level signal transmission of the present invention can be implemented in an ASK mode using the foregoing signal point assignment. The system of the present invention works in the same manner as of a conventional equal signal point distance technique when the signal to noise ratio or C/N rate is high. If the C/N rate becomes low and no data can be reproduced by the conventional technique, the present system ensures reproduction of the first data stream D_1 but not the second data stream D_2 . In more detail, the state at low C/N is shown in FIG. 60 illustrating the constellation of ASK of 4 VSB. The signal points transmitted are displaced by a Gaussian distribution to ranges 721a, 722a, 723a, and 724a respectively at the receiver side due to noise and transmission distortion. Therefore, the distinction between the two signals 721 and 722 in the case of slice level 2 or between 723 and 724 in the case of slice level 4 will hardly be executed. In other words, the error rate in the second data stream D_2 will be increased. As apparent from FIG. 60, the two signal points 721 and 722 are easily distinguished from the other two signal points 723 and 724. The distinction between the two signal point groups 725 and 726 can thus be carried out with ease. As the result, the first data stream D_1 will be reproduced at a low error rate.

Accordingly, the two different level data D_1 and D_2 can be transmitted simultaneously. More particularly, both the first

and second data streams D_1 and D_2 of a given signal transmitted through the multi-level transmission system can be reproduced at the area where the C/N rate is high and the first data stream D_1 only can be reproduced in the area where the C/N rate is low.

FIG. 61 is a block diagram of a transmitter 741 in which an input unit 742 comprises a first data stream input 743 and a second data stream input 744. A carrier wave from a carrier generator 64 is amplitude modulated by a multiplier 746 using an input signal fed through a processor 745 from the input unit 743 to provide the 4-level or 8-level ASK signal, as shown in FIG. 62(a). The modulated signal, i.e., the 4-level or 8-level ASK signal is then band limited by a band pass filter 747 into a vestigial side band having some residual side band of the carrier, as shown in FIG. 62(b), i.e., to an ASK signal of e.g. VSB mode which is then delivered from an output unit 748.

The waveform of the ASK signal after filtering will now be examined. FIG. 62(a) shows a frequency spectrum of the ASK modulated signal in which two sidebands are provided on both sides of the carrier frequency band. One of the two sidebands is eliminated by the filter 474 to produce a signal 749 which contains a carrier component as shown in FIG. 62(b). The signal 749 is a VSB signal and if the modulation frequency band is f_m , will be transmitted in a frequency band of about $f_c/2$. Hence, the frequency utilization becomes high. Using VSB mode transmission, the ASK signal of two bit per symbol shown in FIG. 60 can thus carry in the same frequency band an amount of data equal to that of 16 QAM mode at four bits per symbol for 4 VSB, and 32 QAM mode at five bits per symbol for 8 VSB.

FIG. 63 is a block diagram of a receiver 751 in which an input signal intercepted by a terrestrial antenna 32a is transferred through an input unit 752 to a mixer 753 where it is mixed with a signal from a variable oscillator 754 controlled by channel selection to a lower medium frequency signal. The signal from the mixer 753 is then detected by a detector 755 and filtered by an LPF 756 to a baseband signal which is transferred to a discriminating/demodulator circuit 757 which has 4-level slicer in the case of 4 VSB, and 8-level slicer in the case of 8 VSB. The discrimination/demodulator circuit 757 reproduces two, first D_1 and second D_2 , data streams from the baseband signal and transmits them further through first and second data stream output 758 and 759 respectively.

The transmission of a TV signal using such a transmitter and a receiver will be explained. FIG. 64 is a block diagram of a video signal transmitter 774 in which a high resolution TV signal, e.g. an HDTV signal, is fed through an input unit 403 to a divider circuit 404 of a first video encoder 401 where it is divided into four high/low frequency TV signal components denoted by e.g. $H_L V_L$, $H_L V_H$, $H_H V_L$, and $H_H V_H$. This action is identical to that of the third embodiment previously described referring to FIG. 30 and will not be explained in more detail. The four separate TV signals are encoded respectively by a compressor 405 using a known DPCMDCT variable length code encoding technique which is commonly used e.g. in MPEG. Meanwhile, the motion compensation of the signal is carried out at the input unit 403. The compressed signals are summed by a summer 771 into two, first and second, data streams D_1 and D_2 . The low frequency video signal component or $H_L V_L$ signal is contained in the first data stream D_1 . The two data stream signals D_1 and D_2 are then transferred to first and second data stream inputs 743 and 744 of a transmitter unit 741 where they are amplitude modulated and summed into an ASK signal of e.g. VSB mode which is propagated from a terrestrial antenna for broadcast service.

FIG. 65 is a block diagram of a TV receiver for such a digital TV broadcast system. A 4-VSB or 8-VSB digital TV signal intercepted by a terrestrial antenna 32a is fed to an input 752 of a receiver 781. The signal is then transferred to a VSB detection/demodulation circuit 760 where a desired channel signal is selected and demodulated to two, first and second, data streams D_1 and D_2 which are then fed to first and second data stream outputs 758 and 759 respectively. The operation in the receiver unit 751 is similar to that described previously and will not be explained in more detail. The two data streams D_1 and D_2 are sent to a divider unit 776 in which D_1 is divided by a divider 777 into two components; one or compressed $H_L V_L$ is transferred to a first input 521 of a second video decoder 422 and the other is fed to a summer 778 where it is summed with D_2 prior to transfer to a second input 531 of the second video decoder 422. Compressed $H_L V_L$ is then sent from the first input 521 to a first expander 523 where it is expanded to $H_L V_L$ of the original length which is then transferred to a video mixer 548 and an aspect ratio changing circuit 779. When the input TV signal is an HDTV signal, $H_L V_L$ represents a wide-screen NTSC signal. When the same is an NTSC signal, $H_L V_L$ represents a lower resolution video signal, e.g. MPEG1, that an NTSC level.

The input TV signal of the embodiment is an HDTV signal and $H_L V_L$ becomes a wide-screen NTSC signal. If the aspect ratio of an available display is 16:9, $H_L V_L$ is directly delivered through an output unit as a 16:9 video output 426. If the display has an aspect ratio of 4:3, $H_L V_L$ is shifted by the aspect ratio changing circuit 779 to a letterbox or sidepanel format and then, delivered from the output unit 780 as a corresponding format video output 425.

The second data stream D_2 fed from the second data stream output 759 to the summer 778 is summed with the output of the divider 777 to a sum signal which is then fed to the second input 531 of the second video decoder 422. The sum signal is further transferred to a divider circuit 531 while it is divided into three compressed forms of $H_L V_H$, $H_H V_L$, and $H_H V_H$. The three compressed signals are then fed to a second 535, a third 536, and a fourth expander 537 respectively for converting by expansion to $H_L V_H$, $H_H V_L$, and $H_H V_H$ of the original length. The three signals are summed with $H_L V_L$ by the video mixer 548 to a composite HDTV signal which is fed through an output 546 of the second video decoder to the output unit 780. Finally, the HDTV signal is delivered from the output unit 780 as an HDTV video signal 427.

The output unit 780 is arranged for detecting an error rate in the second data stream of the second data stream output 759 through an error rate detector 782 and if a condition in which the error rate is high continues for a predetermined time, $H_L V_L$ of low resolution video data systematically are produced for a predetermined time.

Accordingly, the multi-level signal transmission system for digital TV signal transmission and reception becomes feasible. For example, if a TV signal transmitter station is near, both the first and second data streams of a received signal can successfully be reproduced to exhibit an HDTV quality picture. If the transmitter station is far, the first data stream can be reproduced to $H_L V_L$ which is converted to a low resolution TV picture. Hence, any TV program will be intercepted in a wider area and displayed at a picture quality ranging from HDTV to NTSC level.

FIG. 66 is a block diagram showing another arrangement of the TV receiver. As shown, the receiver unit 751 contains only a first data stream output 768 and thus, the processing of the second data stream or HDTV data is not needed so that

the overall construction can be minimized. It is a good idea to have the first video decoder 421 shown in FIG. 31 as a video decoder of the receiver. Accordingly, an NTSC level picture will be reproduced. The receiver is fabricated at much less cost as having no capability to receive any HDTV level signal and will widely be accepted in the market. In brief, the receiver can be used as an adapter tuner for interception of a digital TV signal with giving no modification to the existing TV system including a display.

When a scrambled 4-level VSB or 8-level VSB is received as shown in FIG. 66, the scramble cancellation signal transmitted with the 4- or 8-level VSB signal is compared by the descramble number comparator 502b with the number stored in the descramble number register 502c in the descrambler 502. Only when the transmitted stored numbers match is descrambling of specific scrambled transmissions permitted.

The TV receiver 781 may have a further arrangement shown in FIG. 67, which serves as both a satellite broadcast receiver for demodulation of PSK signals and a terrestrial broadcast receiver for demodulation of VSB signals. In operation, a PSK signal received by a satellite antenna 32 is mixed by a mixer 786 with a signal from an oscillator 787 into a low frequency signal which is then fed through an input unit 34 to a mixer 753 similar to one shown in FIG. 63. The low frequency signal of PSK or QAM mode in a given channel of the satellite TV system is transferred to a modulator 35 where two data streams D_1 and D_2 are reproduced from the signal. D_1 and D_2 are sent through a divider 788 to a second video decoder 422 where they are converted to a video signal which is then delivered from an output unit 780. Also, a digital or analogue terrestrial TV signal intercepted by a terrestrial antenna 32a is fed through an input unit 752 to the mixer 753 where one desired channel is selected in the same manner as described in FIG. 63 and converted into to a low frequency base band signal. The signal of analogue form is sent directly to the demodulator 35 for demodulation. The signal of digital form is then fed to a discrimination/demodulation circuit 757 where two data streams D_1 and D_2 are reproduced from the signal. D_1 and D_2 are converted by the second video decoder 422 into a video signal which is then delivered further. A satellite analogue TV signal is transferred to a video demodulator 788 where it is AN modulated into an analogue video signal which is then delivered from the output unit 780. As understood, the mixer 753 of the TV receiver 781 shown in FIG. 67 is arranged to be compatible between two, satellite and terrestrial, broadcast services. Also, a receiver circuit including a detector 755 and an LPF 756 for AM modulation of an analogue signal can be utilized compatible with a digital ASK signal of the terrestrial TV service. The major part of the arrangement shown in FIG. 67 is arranged for compatible use, thus minimizing a circuitry construction.

According to the embodiment, a 4-level ASK signal is divided into two, D_1 and D_2 , level components for execution of the one-bit mode multi-level signal transmission. If an 8-level ASK signal as shown in FIGS. 68(a) and (b) illustrating the constellation of the 8-VSB signal, i.e., 8-level VSB signal is used, it can be transmitted in a one-bit mode three-level, D_1 , D_2 , and D_3 , arrangement, thus, three bits per symbol in total. As shown in FIG. 68(a), the first bit coding is done as follows. D_3 is assigned to eight signal points 721a and 721b; 722a and 722b; 723a and 723b; and 724a and 724b, each pair, i.e., small group, representing a two-level pattern using one bit. Next, the second bit coding is done as follows. D_2 is assigned to two signal point groups 721 and 722; and 723 and 724, two mid groups representing a

As understood from the above, each of the eight signal points is assigned with three bit data (D_1, D_2, D_3). For example, if left side and right side are defined as logic 0 and logic 1, respectively, the three bit data (D_1, D_2, D_3) for the signal point 722a will be (0, 1, 0). This can be explained as follows. Since the signal point 722a is in the left side of the two large groups 725 and 726, logic 0 is given to D_1 . Also, the signal point 722a is in the right side of the two mid groups 721 and 722, so that logic 1 is given to D_2 . Further the signal point 722a is in the left side of the two small groups 722a and 722b, so that logic 0 is given to D_3 . In a similar manner, the three bit data (D_1, D_2, D_3) for the signal point 723a will be (1, 0, 0).

The effects of television broadcasting using the 8-level VSB shown in FIGS. 68(a), (b), and (c) are described below.

The relative effects of 4-level, 8-level, and 16-level VSB are described below.

With 8-level VSB, the effective data transmission quantity is $5 \text{ MHz} \times 6 = 30 \text{ Mbps}$ because the frequency utilization efficiency is 5 bits/Hz. While 15 Mbps–18 Mbps is required for digital HDTV signal transmission as described above, when using 8-level VSB modulation, more than 50% of the actual HDTV signal transmission quantity can be used for error correction coding as shown in FIG. 169. As shown by error rate curves 805 and 806 in FIG. 161, the error rate relative to the same C/N value in the transmission system is less with TCM 8-level VSB than with 4-level VSB, even though error correction code gain is greater with 8-level VSB than with 4-level VSB, because significantly more error correction coding can be added with 8-level VSB during ground station broadcasting of same-data-rate HDTV digital signals using the 6-MHz band. As a result, 8-level VSB with high code gain error correction coding also has the effect of enabling a larger service area for ground station HDTV broadcasts than does 4-level VSB. While the increased size of the error correction circuits required with 8-level VSB does increase the complexity of the receiver

Four- and 8-level VSB have been described above, and 16- and 32-level VSB are described below with reference to FIGS. 159(a)-(b). FIG. 159(a) shows the 16-level VSB constellation. As shown in FIG. 159(b), the signal between two signal points is grouped into eight groups 722a-722h, which are treated as eight signal points and can be treated as 8-level VSB signals to enable a two-stage multilevel transmission. In this case, multilevel transmission can be achieved with time division multiplexing even when intermittently transmitting an 8-level VSB signal. The maximum data rate with this method is 2/3. In FIG. 157(c), the data is further grouped into four groups 723a-723d, which can be

At the receiver side, such a video decoder as described in the third embodiment and shown in FIG. 30 is needed for

In operation, both the D_1 and D_2 signals are fed through two input units 521 and 530 respectively to a switch 812 at the first timing. As their components including H, V , are

As understood, the time-base assignment of data components shown in FIG. 81 also contributes to the similar arrangement of the expander and mixer. Also, four data components of the D₁ signal are fed at respective time slices to a mixer 556. Hence, the circuitry arrangement of the mixer 556 or a plurality of circuit blocks such as provided in the video mixer 548 of FIG. 32 may be arranged for changing the connection therebetween corresponding to each data component so that they become compatible in time division operation and thus, minimized in circuitry construction.

With 8-level VSB, the effective data transmission quantity is $5 \text{ MHz} \times 6 = 30 \text{ Mbps}$ because the frequency utilization efficiency is 5 bits/Hz. While 15 Mbps–18 Mbps is required for digital HDTV signal transmission as described above, when using 8-level VSB modulation, more than 50% of the actual HDTV signal transmission quantity can be used for error correction coding as shown in FIG. 169. As shown by error rate curves 805 and 806 in FIG. 161, the error rate relative to the same C/N value in the transmission system is less with TCM 8-level VSB than with 4-level VSB, even though error correction code gain is greater with 8-level

VSF than with 4-level VSF, because significantly more error correction coding can be added with 8-level VSF during ground station broadcasting of same-data-rate HDTV digital signals using the 6-MHz band. As a result, 8-level VSF with high code gain error correction coding also has the effect of enabling a larger service area for ground station HDTV broadcasts than does 4-level VSF. While the increased size of the error correction circuits required with 8-level VSF does increase the complexity of the receiver circuitry, the circuit scale of the equalizer in the receiver is significantly smaller than that of receivers using QAM modulation, which contains a phase component, because VSF and ASK are amplitude modulation methods. As a result, an 8-level VSF circuit board containing the error correction circuit is smaller than an equivalent 32-level QAM board with the same transmission capacity.

A digital HDTV receiver with an appropriate circuit scale and a large ground station broadcasting service area can therefore be achieved using 8-level VSF.

Note that the ECC 744a and trellis encoder 744b in the transmitter and receiver block diagrams of FIG. 84 for the present embodiment, FIGS. 131, 137, 156, and 157 for embodiment 6, and FIG. 144 for embodiment 9 are used as examples of the specific error correction method, and the 4-, 8-, and 16-level VSF modulator 749 described with reference to FIG. 61 are used for transmission. The VSF demodulator 760 described with reference to FIG. 63 is used in the receiver to generate the digital reception data by means of the 4-, 8-, and 16-level level slicer 757 from the 4-, 8-, and 16-level VSF signal. After error correction by means of the trellis decoder 759b and ECC decoder 759a, described below with reference to FIG. 84 for the present embodiment, and FIGS. 131, 137, 156, and 157 for embodiment 6, a digital HDTV signal is generated by the image expander of the image decoder 402, and the digital HDTV signal is then output.

As shown in FIGS. 160(a) and (b) described below with the sixth embodiment, the ECC encoder 744a uses a Reed-Solomon encoder 744j and interleaver 744k, and uses a deinterleaver 759k and Reed-Solomon decoder 759j for the ECC decoder 759a. Applying interleaving as described in the previous embodiment improves resistance to transmission system noise such as burst error.

Code gain can be further increased and the error rate decreased by using a trellis encoder as shown in FIGS. 128(a), (b), (c), (d), (e), and (f). A ratio 2/3 trellis encoder 744b and decoder 759b as shown in FIG. 172 are most appropriate with 8-level VSF because of 3 bits/symbol coding. The data quantity is compressed 2/3 in this case.

The embodiments have been described using primarily the example of a multilevel (hierarchical) digital television signal. While an ideal broadcasting format can be achieved using a multilevel signal, the image compression circuit and modulator/demodulator circuits become more complex, and are therefore not preferable due to cost for the start of new broadcasting services. As described at the beginning of the fifth embodiment, a broadcasting system with a simple television circuit can be achieved by using a signal-signal interval $L=L_0$, i.e., an equal interval, in the 4-level VSF and 8-level VSF signals and a non-multilevel television transmission, and by simplifying the circuit shown in FIG. 137 as shown in FIG. 157. Once the HDTV format is in common use, it is then possible to change to a hierarchical 8-level VSF transmission format.

Four- and 8-level VSF have been described above, and 16- and 32-level VSF are described below with reference to FIGS. 159(a)-(b). FIG. 159(a) shows the 16-level VSF

With this method, a multilevel transmission whereby 8-level VSB or 4-level VSB data can be reproduced when the C/N ratio of the 16-level VSB data deteriorates can be achieved. By doubling the signal points of the 16-level VSB format as shown in FIG. 159(d), 32-level VSB transmission is enabled. When 16-level VSB capacity is increased in the future, this method will maintain compatibility while making it possible to obtain a 6-bits/symbol data capacity.

While 4-level VSB and 8-level VSB are used by way of example above, 16-level VSB as shown in FIGS. 159(a)-(c) can also be used for transmission. With 16-level VSB, a 40-Mbps transmission capacity can be used with a 6-MHz band in ground station broadcasting. Because the data rate of the HDTV digital compression signal is 15-18 Mbps using the MPEG standard, there is excessive reserve in the transmission capacity. As shown in FIG. 169, redundancy R_{16} is 100% or greater; redundancy is therefore too great for transmitting one channel digital HDTV, and the circuitry is simply made more complex with little additional advantage gained over 8-level VSB. In addition, 16-level VSB redundancy is only about 10%, the same as 4-level VSB redundancy, in ground station HDTV broadcasting of two programs with 16-level VSB. As a result, the service area is reduced because sufficient error correction coding cannot be applied with two-program 16-level VSB. As described before, sufficient error correction cannot be applied with 4-level VSB because the redundancy R_4 is 10-20% and the service area is limited. As will be known from FIG. 169, sufficient error correction coding can be achieved with 8-level VSB because the redundancy R_8 is 50%. A broad service area can also be achieved without significantly

FIG. 84 will now be explained in more detail. FIG. 174 is a block diagram showing a circuitry arrangement of QAM/VSB compatible modulator for multi-level transmission according to Embodiment 5. The input 742 comprises a first data stream 743 and a second data stream 744 which are combined by a processor 745 and then code allocated to I-channel and Q-channel by an I/Q mapping 1000 prior to quadrature modulation. For the VSB modulation, the I/Q mapping 1000 delivers data on one or I-axis of the two channels while the I and Q channels are the same in the level. For the QAM modulation, the code assignment is executed according to the constellation diagram. Resultant mapped signal outputs of the I/Q mapping 1000 are transmitted to two FIR filters 1001 and 1002 where they are weighted with roll-off characteristics before being supplied to DC offsets 1003 and 1004 respectively. In the VSB system, the tap coefficient values of the FIR filters 1001 and 1002 are determined so that two filter outputs are orthogonal to each other. More particularly, a pair of equal input data

streams are converted by the FIR filters 1001 and 1002 to two discrete code forms which are plotted in orthogonal relationship to each other in the coordinate. Also, in the VSB system, a portion of the carrier is allowed to pass through for ease of reproduction at the receiver side. This is done at the DC offsets 1003 and 1004. The tap coefficients of the FIR filters 1001 and 1002 are selected with a VSB/QAM selector 1009 for determining the type of modulation. A control output of the QAM/VSB selector 1009 actuates a coefficient generator 1008 for producing and delivering given coefficients to the two FIR filters 1001 and 1002. Two outputs of the DC offsets 1003 and 1004 are fed to a data selector 1005 where their I/Q components are alternately selected to produce a VSB or QAM modulated signal. The resultant digital modulated signal of the data selector 1005 is converted by a D/A converter to its analog form which is further transmitted from an output 748. The action of the data selector 1005 is controlled by a four-time symbol frequency clock produced and supplied from a clock generator 1007.

As explained, the foregoing compatible hardware arrangement is capable of producing both QAM and VSB modulated signals by selectively determining the coefficient values of the coefficient generator 1008.

FIG. 175 is a block diagram showing another circuitry arrangement of the QAM/VSB modulator for multi-level transmission according to Embodiment 5. Two, first and second, data streams are multiplexed by a processor 745 and code allocated by an I/Q mapping 1000 to the I and Q coordinates. Resultant two, I and Q, channel data outputs of the I/Q mapping 1000 are transferred to an I/Q selector 1010 where one of the I and Q signals is selected using a four-time symbol frequency clock produced and supplied from a clock generator 1007. The selected channel modulated signal is waveform shaped by an FIR filter 1011, digital-to-analog converted by a D/A converter 1012, and further transmitted through an output 748.

In this arrangement, the filter circuit is simple as uniaxial although the filter processing speed has to be increased to two times that of the previous arrangement.

FIG. 176 illustrates a third modification of the QAM/VSB modulator of Embodiment 5. Two, first and second, data streams are multiplexed by a processor 745 and transferred to an I/Q mapping 1000. I and Q channel signals plotted to their respective code points by the I/Q mapping 1000 are subjected to VSB orthogonal impulse response processing of two FIR filters 1026 and 1027 and transmitted to two multipliers 1020 and 1021 respectively. The multipliers 1020 and 1021 are loaded with different waveform data determined by a cos table 1024 and a sin table 1023 respectively to which a quasi-carrier is supplied from a counter 1025. Accordingly, the I and Q channel signals are multiplied with the cos and sin signals respectively at their respective multipliers 1020 and 1021. Two modulated outputs of the multipliers 1020 and 1021 are fed to an adder 1022 where their I and Q data are combined. A resultant composite signal is then converted by a D/A converter 1006 to its analog form which is further delivered from an output 748.

In the third modification, the carrier frequency of the analog modulated signal can be changed by varying the counting interval of the counter 1025.

FIG. 177 is a block diagram showing a Trellis decoder in the demodulator. The Trellis encoder 759b explained with FIG. 84 may change the coding grain according to the level of the transmitter side and the conditions of a transmission line. Hence, a corresponding Trellis decoder is needed in the receiver side.

The results of calculation with the Trellis decoder denoted by 1030 are stored in a given number of path memories, generally 1032, 1033, and 1034, merged in a path memory group 1031. The number of the results is preliminarily determined from the needs at the receiver side, depending on e.g. the transmission channel basis or the broadcasting system of a type. For the purpose, an address control signal is supplied to a memory address generator 1035 which in turn addresses a corresponding one of the path memories to select a code path.

FIG. 178 is a block diagram of a receiver for interception of VSB multi-level transmitted signals emitted in the air. It is also essential for digital broadcasting service to eliminate any signal interference which is common in the conventional analog broadcasting systems.

For elimination of such an interference, notch filters have been used with optimum success. However, any fixed notch filter can hardly conduct a frequency offset signal used in the conventional analog broadcasting system. The receiver shown in FIG. 178 offers an improvement. An analog or digital signal from an antenna 32a is selectively received by a tuner 752 and data extracted by an I/Q detector 1040. During the detection, a frequency error correction signal is produced by an AFC detector 1043 from orthogonal data and fed back to the tuner 752. The AFC detector 1043 is adapted to vary the feedback of the frequency error correction signal using an external control. The interference by an analog signal in a detected signal is examined by an interference detector 1041 where it is compared with stored interference patterns for identification. If the intercepted digital signal carries a cochannel interference by an analog signal, it is subjected to a notch filter characteristic action of an NTSC rejection filter 1042. If not, the digital signal is directly passed without the rejecting action of the filter 1042. When the interference detector 1041 has found an increase of the interference in the intercepted signal resulting from the frequency offset at the transmitter side, it causes a carrier offset detector 1044 to produce and transmit a command signal via the AFC detector 1043 to the tuner 752 for changing its local oscillation frequency. As the result, the interference level measured at the interference detector 1041 is decreased to a point which represents the optimum receiving level of the receiver. An output signal of the NTSC rejection filter 1042 is then fed to an equalizer 1045 where its ghost component of removed. In addition, a BER (bit error ratio) counter 1048 is provided for detecting remaining errors in the equalized signal and if so, the signal is fed back for optimizing the signal interception in relation to the frequency offset. Finally, the equalized signal from the equalizer 1045 is transferred to a rotator 1046 for carrier reproduction and then to a decision 1047 for reproduction of data from the corresponding code points.

Intercepted broadcasting waveforms including QAM and VSB signals are fed to a tuner 1050. After tuning, an intermediate frequency signal of the selected waveform is

band rejected by a filter (SAW) 1051 and converted by an analog converter 1052 to an A/D converter enable frequency. When the selected waveform is a VSB signal, it is subjected to uniaxial detection and AFC detection of a VSB detector 1054. An A/D converter 1053 digitizes a QAM modulated signal directly and a baseband signal extracted from the VSB signal.

When the digitized signal is a QAM signal, it is subjected to digital AFC action of an AFC 1055, I/Q data reconstruction of a QAM detector 1056, and waveform shaping of a roll-off filter 1057. The waveform shaped signal is then transmitted to a waveform equalizer 1059 for removal of unwanted ghost. The output signal of the equalizer 1059 is phase compensated by a carrier recovery 1060 and code reconstructed by a decision 1061. Meanwhile, an AGC detector 1064 produces an AGC signal and an AFC detector 1062 calculates a frequency change from the output of the carrier recovery 1060.

A code form signal of the decision 1061 is then transmitted through a deinterleaver 1065, a Trellis decoder 1066, a deinterleaver 1067, and a Reed-Solomon decoder 1068 and released after an error correction.

The VSB signal output of the A/D converter 1053 is directly fed to the equalizer 1059 and then processed in the same manner as for the QAM signal. It is also subjected to the same error correction as the QAM signal.

There is a clock recovery 1058 operable with the entire symbols for the QAM signal. For the VSB signal, a clock reference signal of a burst form is extracted by a gate signal generator from the VSB output signal of the VSB detector 1054 and fed to the clock recovery 1058 for actuation of its PLL.

EMBODIMENT 6

A sixth embodiment of the present invention is a magnetic recording and playback apparatus in which the above transmission and recording method is employed. Although in the fifth embodiment a multiple-level ASK data transmission is described, but it is also feasible in the same manner to adopt this invention in a magnetic recording and playback apparatus of a multi-level ASK recording system as shown in the block diagram of FIG. 173. A multi-level or non-multilevel magnetic recording can be realized by applying the C-CDM method of the present invention to PSK, FCK, and QAM, as well as ASK.

First of all, the method of realizing a multi-level recording in a 16 QAM or 32 QAM magnetic recording playback apparatus will be explained in compliance with the C-CDM method of the present invention. FIG. 84 is a circuit block diagram showing a 16 QAM 32 QAM, 4 ASK, 8 ASK, 16 ASK, 8 PSK system incorporating C-CDM modulator. Hereinafter, a QAM system being multiplexed by the C-CDM method is termed as SRQAM. FIGS. 137 and 154 show block diagrams in which SRQAM is applied to the transmission system, such as broadcast.

As shown in FIG. 84, an input video signal, e.g. an HDTV signal, to a magnetic record/playback apparatus 851 is divided and compressed by a video encoder 401 into a low frequency band signal through a first video encoder 401a and a high frequency band signal through a second video encoder 401b respectively. Then, a low frequency band component, e.g. $H_L V_L$, of the video signal is fed to a first data stream input 743 of an input unit 742 and a high frequency band component including $H_H V_H$ is fed to a second data stream input 744 of the same. The two components are further transferred to a modulator 749 of a modu-

lator/demodulator unit 852. The first data stream input 743 adds an error correcting code to the low frequency band signal in an ECC 743a. On the other hand, the second data stream fed into the second data stream input 744 is 2 bit in case of 16 SRQAM, 3 bit in case of 36 SRQAM, and 4 bit in case of 64 SRQAM. After an error correcting code is encoded by an ECC 744a, this signal is supplied to a Trellis encoder 744b, such as shown in FIGS. 128(a), (b), (c) in which a Trellis encoded signal having a ratio 1/2 in case of 16 SRQAM, 2/3 in case 32 SRQAM, and 3/4 in case of 64 SRQAM, is produced. A 64 SRQAM signal, for example, has a first data stream of 2 bit and a second data stream of 4 bit. A Trellis encoder 744b of FIG. 128(c) allows this 64 SRQAM signal to perform a Trellis encoding of ratio 3/4 wherein 3 bit data is converted into 4 bit data. In the case of 4 ASK, 8 ASK, and 16 ASK, the Trellis encoding at the ratio of 1/2, 2/3, and 4/3 can be carried out solely. Thus, redundancy increases and a data rate decreases, while error correcting capability increases. This results in the reduction of an error rate in the same data rate. Accordingly, transmittable information amount of the recording/playback system or transmission system will increase substantially.

Since the 8 VSB transmission system described above in connection with the fifth embodiment takes 3 bits per symbol, the Trellis encoder 744g and the Trellis decoder 744q with the ratio 2/3 as shown in FIGS. 128(b), (e) can be used, and the entire block diagram will be as shown in FIG. 171.

It is, however, possible to constitute the first data stream input 743 not to include a Trellis encoder as shown in FIG. 84 of this sixth embodiment because the first data stream has low error rate inherently. This will be advantageous in view of the simplification of circuit configuration. The second data stream, however, has a narrow inter-code distance as compared with the first data stream and, therefore, has a worse error rate. The Trellis encoding of the second data stream improves such a worse error rate. It is no doubt that an overall circuit configuration becomes simple if the Trellis encoding of the first data stream is eliminated. An operation for modulation is almost identical to that of the transmitter of the fifth embodiment shown in FIG. 64 and will be not be explained in greater detail. A modulated signal of the modulator 749 is fed into a recording/playback circuit 853 in which it is AC biased by a bias generator 856 and amplified by an amplifier 857a. Thereafter, the signal is fed to a magnetic head 854 for recording onto a magnetic tape 855.

A format of the recorded signal is shown in a recording signal frequency assignment of FIG. 113. A main, e.g. 16 SRQAM, signal 859 having a carrier of frequency f_c records information, and also a pilot f_p signal 859a having a frequency $2f_c$ is recorded simultaneously. Distortion in the recording operation is lowered as a bias signal 859b having a frequency $2f_c$ is recorded simultaneously. Distortion in the recording operation is lowered as a bias signal 859b having a frequency f_{BMS} adds AC bias for magnetic recording. Two of three-level signals shown in FIG. 113 are recorded in multiple state. In order to reproduce these recorded signals, two thresholds Th-1-2, Th-2 are given. A signal 859 will reproduce all of two levels while a signal 859 will reproduce D_1 data only, depending on C/N level of the recording/playback.

A main signal of 16 SRQAM will have a signal point assignment shown in FIG. 10. Furthermore, a main signal of 36 SRQAM will have a signal point assignment shown in FIG. 100. When 4 ASK, 8 ASK are used, the constellation will be as shown in FIGS. 58, 68(a) and (b). In reproduction of this signal, both the main signal 859 and the pilot signal

859a are reproduced through the magnetic head 854 and amplified by an amplifier 857b. An output signal of the amplifier 857b is fed to a carrier reproduction circuit 858 in which a filter 858a separates the frequency of the pilot signal f_p having a frequency $2f_0$ and $1/2$ frequency divider 858b reproduces a carrier of frequency f_0 to transfer it to a demodulator 760. This reproduced carrier is used to demodulate the main signal in the demodulator 760. Assuming that a magnetic recording tape 855, e.g. HDTV tape, is of a high C/N rate, 16 signal points are discriminatable and thus both D_1 and D_2 are demodulated in the demodulator 760. Subsequently, a video decoder 402 reproduce all the signals. An HDTV VCR can reproduce a high bit-rate TV signal such as 15 Mbps HDTV signal. The lower the C/N rate is, the cheaper the cost of a video tape is. So far, a VHS tape in the market is inferior more than 10 dB in C/N rate to a full-scale broadcast tape. If a video tape 855 is of low C/N rate, it will not be able to discriminate all the 16 or 32 valued signal points. Therefore the first data stream D_1 can be reproduced, while a 2 bit, 3 bit, or 4 bit data stream of the second data stream D_2 cannot be reproduced. Only 2 bit data stream of the first data stream is reproduced. If a two-level HDTV video signal is recorded and reproduced, a low C/N tape having insufficient capability of reproducing a high frequency band video signal can output only a low rate low frequency band video signal of the first data stream, specifically e.g. a 7 Mbps wide NTSC TV signal.

As shown in a block diagram of FIG. 144, a second data stream output 759, the second data stream input 744, and the second video decoder 402a can be eliminated in order to provide customers one aspect of lower grade products. In this case, a recording/playback apparatus 851, dedicated to a low bit rate, will include a modulator such as a modulated QPSK which modulates or demodulates the first data stream only. This apparatus allows only the first data stream to be recorded and reproduced. Specifically, a wide NTSC grade video signal can be recorded and reproduced.

Above-described high C/N rate video tape 855 capable of recording a high bit-rate signal, e.g. HDTV signal, will be able to use in such a low bit-rate dedicated magnetic recording/playback apparatus but will reproduce the first data stream D_1 only. That is, the wide NTSC signal is outputted, while the second data stream is not reproduced. In other words, one recording/playback apparatus having a complicated configuration can reproduce a HDTV signal and the other recording/playback apparatus having a simple configuration can reproduce a wide NTSC signal if a given video tape 855 includes the same multi-level HDTV signal. Accordingly in case of two-level multiple state, four combinations will be realized with perfect compatibility among two tapes having different C/N rates and two recording/playback apparatus having different recording/playback data rates. This will bring a remarkable effect. In this case, an NTSC dedicated apparatus will be simple in construction as compared with an HDTV dedicated apparatus. In more detail, a circuitry scale of ECTV decoder will be $1/2$ of that of HDTV decoder. Therefore, a low function apparatus can be realized at fairly low cost. Realization of two, HDTV and EDTV, types recording/playback apparatus having different recording/reproducing capability of picture quality will provide various type products ranging in a wide price range. Users can freely select a tape among a plurality of tapes from an expensive high C/N rate tape to a cheaper low C/N rate tape, as occasion demands so as to satisfy required picture quality. Not only maintaining perfect compatibility but obtaining expandable capability will be attained and further compatibility with a future system will be ensured. Conse-

Compatibility with future standards will be described below. A setting of standards for recording/playback apparatus such as VCR is normally done by taking account of the most highest C/N rate tape available in practice. The recording characteristics of a tape progresses rapidly. For example, the C/N rate has been improved more than 10 dB compared with the tape used 10 years ago. If supposed that new standards will be established after 10 to 20 years due to an advancement of tape property, a conventional method will encounter with difficulty in maintaining compatibility with older standards. New and old standards, in fact, used to be one-way compatible or non-compatible with each other. On the contrary, in accordance with the present invention, the standards are first of all established for recording and/or reproducing the first data stream and/or second data stream on present day tapes. Subsequently, if the C/N rate is improved magnificently in future, an upper level data stream, e.g. a third data stream, will be added without any difficulty as long as the present inventions incorporated in the system. For example, a super HDTV VCR capable of recording or reproducing three-level 64 SRQAM or 8 ASK will be realized while maintaining perfect compatibility with the conventional standards. A magnetic tape, recording first to third data streams in compliance with new standards, will be able to use, of course, in the older two-level magnetic recording/playback apparatus capable of recording and/or reproducing only first and second data streams. In this case, first and second data streams can be reproduced perfectly although the third data stream is left non-reproduced. Therefore, an HDTV signal can be reproduced. For these reasons, the merit of expanding recording data amount while maintaining compatibility between new and old standards is expected.

FIG. 131 is a block diagram showing a three-level magnetic recording/playback apparatus in accordance with the present invention which includes one theoretical level in addition to two physical levels. This system is substantially

Next, an effect of multi-level recording will be described with respect to fast feed playback. As shown in a recording track diagram of FIG. 132, a recording track 855a having an azimuth angle A and a recording track 855b having an opposite azimuth angle B are alternately arrayed on the magnetic tape 855. The recording track 855a has a recording region 855c at its central portion and the remainder as D_{1,2} recording regions 855d, as denoted in the drawing. This unique recording pattern is provided on at least one of several recording tracks. The recording region 855c records one frame of LDTV signal. A high frequency band signal D₂ is recorded on a D₂ recording region 855e corresponding to

an entire recording region of the recording track 855a. This recording format causes no novel effect against a normal speed recording/playback operation.

A fast feed reproduction in a reverse direction does not allow a magnetic head trace 855f having an azimuth angle A to coincide with the magnetic track as shown in the drawing. As the present invention provides the $D_{1,1}$ recording region 855c at a central narrow region of the magnetic tape as shown in FIG. 132, this region only is surely reproduced although it occurs at a predetermined probability. Thus reproduced $D_{1,1}$ signal can demodulate an entire picture plane of the same time although its picture quality is an LDTV of MPEG1 level. In this manner several to several tens LDTV signals per second can be reproduced with perfect picture images during the fast feed playback operation, thereby enabling users to surely confirm picture images during the fast feed operation.

A head trace 855g corresponds to a head trace in the reverse playback operation, from which it is understood only a part of the magnetic track is traced in the reverse playback operation. The recording/playback format shown in FIG. 132 however allows, even in such a reverse playback operation, to reproduce $D_{1,1}$ recording region and, therefore, an animation of LDTV grade is outputted intermittently.

Accordingly, the present invention makes it possible to record a picture image of LDTV grade within a narrow region on the recording track, which results in intermittent reproduction of almost perfect still pictures with picture quality of LDTV grade during normal and reverse fast feed playback operations. Thus, the users can easily confirm picture images even in high-speed searching.

Next, another method will be described to respond a higher speed fast feed playback operation. A $D_{1,1}$ recording region 855c is provided as shown at lower right of FIG. 132, so that one frame of LDTV signal is recorded thereon. Furthermore, a narrow $D_{1,1} \cdot D_2$ recording region 855h is provided at a part of the $D_{1,1}$ recording region 855c. A subchannel $D_{1,1}$ in this region records a part of information relating to the one frame of LDTV signal. The remainder of the LDTV information is recorded on the D_2 recording region 855j of the $D_{1,1} \cdot D_2$ recording region 855h in a duplicated manner. The subchannel D_2 has a data recording capacity 3 to 5 times as much as the subchannel $D_{1,1}$. Therefore, subchannels $D_{1,1}$ and D_2 can record one frame information of LDTV signal on a smaller, $1/3 \sim 1/5$, area of the recording tape. As the head trace can be recorded in a further narrower regions 855h, 855j, both time and area are decreased into $1/3 \sim 1/5$ as compared with a head trace time T_{S1} . Even if the trace of head is further inclined by increasing fast feed speed amount, the probability of entirely tracing this region will be increased. Accordingly, perfect LDTV picture images will be intermittently reproduced even if the fast feed speed is increased up to 3 to 5 times as fast as the case of the subchannel $D_{1,1}$ only.

In case of a two-level VCR, this method is useless in reproducing the D_2 recording region 855j and therefore this region will not be reproduced in a high-speed fast feed playback operation. On the other hand, a three-level high performance VCR will allow users to confirm a picture image even if a fast feed playback operation is executed at a faster, 3 to 5 times as fast as two-level VCR, speed. In other words, not only excellent picture quality is obtained in accordance with the cost but a maximum fast feed speed capable of reproducing picture images can be increased in accordance with the cost.

Although this embodiment utilizes a multi-level modulation system, it is needless to say that a normal, e.g. 16 QAM,

modulation system can also be adopted to realize the fast feed playback operation in accordance with the present invention as long as an encoding of picture images is of multiple type.

A recording method of a conventional non-multiple digital VCR, in which picture images are highly compressed, disperses video data uniformly. Therefore, it was not possible in a fast feed playback operation to reproduce all the picture images on a picture plane of the same time. The picture reproduced was the one consisting of a plurality of picture image blocks having non-coincident time bases. The present invention, however, provides a multi-level HDTV VCR which can reproduce picture image blocks having coincided time bases on a picture plane during a fast feed playback operation although its picture quality is of LDTV grade.

The three-level recording in accordance with the present invention will be able to reproduce a high resolution TV signal such as HDTV signal when the recording/playback system has a high C/N rate. Meanwhile, a TV signal of EDTV grade, e.g. a wide NTSC signal, or a TV signal of LDTV grade, e.g. a low resolution NTSC signal, will be outputted when the recording/playback system has a low C/N rate or poor function.

As is described in the foregoing description, the magnetic recording/playback apparatus in accordance with the present invention can reproduce picture images consisting of the same content even if C/N rate is low or error rate is high, although the resolution or the picture quality is relatively low.

EMBODIMENT 7

A seventh embodiment of the present invention will be described for execution of four-level video signal transmission. A combination of the four-level signal transmission and the four-level video data construction will create a four-level signal service area as shown in FIG. 91. The four-level service area is consisted of, from innermost, a first 890a, a second 890b, a third 890c, and a fourth signal receiving area 890d. The method of developing such a four-level service area will be explained in more detail.

The four-level arrangement can be implemented by using four physically different levels determined through modulation or four logic levels defined by data discrimination in the error correction capability. The former provides a large difference in the C/N rate between two adjacent levels and the C/N rate has to be increased to discriminate all the four levels from each other. The latter is based on the action of demodulation and a difference in the C/N rate between two adjacent levels should stay at minimum. Hence, the four-level arrangement is best constructed using a combination of two physical levels and two logic levels. The division of a video signal into four signal levels will be explained.

FIG. 93 is a block diagram of a divider circuit 3 which comprises a video divider 895 and four compressors 405a, 405b, 405c, and 405d. The video divider 895 contains three dividers 404a, 404b, and 404c which are arranged identical to the divider circuit 404 of the first video encoder 401 shown in FIG. 30 and will be not be explained in greater detail. An input video signal is divided by the dividers into four components, $H_L V_L$ of low resolution data, $H_H V_H$ of high resolution data, and $H_L V_H$ and $H_H V_L$ for medium resolution data. The resolution of $H_L V_L$ is a half that of the original input signal.

The input video signal is first divided by the divider 404a into two, high and low, frequency band components, each

component being divided into two, horizontal and vertical, segments. The intermediate between the high and low frequency ranges is a dividing point according to the embodiment. Hence, if the input video signal is an HDTV signal of 1000 line vertical resolution, $H_L V_L$ has a vertical resolution of 500 lines and a horizontal resolution of a half value.

Each of two, horizontal and vertical, data of the low frequency component $H_L V_L$ is further divided by the divider 404c into two frequency band segments. Hence, an $H_L V_L$ segment output is 250 lines in the vertical resolution and $1/4$ of the original horizontal resolution. This output of the divider 404c which is termed as an LL signal is then compressed by the compressor 405a to a $D_{1,1}$ signal.

The other three higher frequency segments of $H_L V_L$ are mixed by a mixer 772c to an LH signal which is then compressed by the compressor 405b to a $D_{1,2}$ signal. The compressor 405b may be replaced by three compressors provided between the divider 404c and the mixer 772c.

$H_L V_H$, $H_H V_L$, and $H_H V_H$ from the divider 404a are mixed by a mixer 772a to an $H_H V_H$ -H signal. If the input signal is as high as 1000 lines in both horizontal and vertical resolution, $H_H V_H$ -H has 500 to 1000 lines of a horizontal and a vertical resolution. $H_H V_H$ -H is fed to the divider 404b where it is divided again into four components.

Similarly, $H_L V_L$ from the divider 404b has 500 to 750 lines of a horizontal and a vertical resolution and transferred as an H_L signal to the compressor 405c. The other three components, $H_L V_H$, $H_H V_L$, and $H_H V_H$, from the divider 404b have 750 to 1000 lines of a horizontal and a vertical resolution and are mixed by a mixer 772b to an HH signal which is then compressed by the compressor 405d and delivered as a $D_{2,2}$ signal. After compression, the HL signal is delivered as a $D_{2,1}$ signal. As the result, LL or $D_{1,1}$ carries a frequency data of 0 to 250 lines, LH or $D_{1,2}$ carries a frequency data from more than 250 lines up to 500 lines, HL or $D_{2,1}$ carries a frequency data of more than 500 lines up to 750 lines, and HH or $D_{2,2}$ carries a frequency data of more than 750 lines to 1000 lines so that the divider circuit 3 can provide a four-level signal. Accordingly, when the divider circuit 3 of the transmitter 1 shown in FIG. 87 is replaced by the divider circuit of FIG. 93, the transmission of a four-level signal will be implemented.

The combination of multi-level data and multi-level transmission allows a video signal to be at steps declined in the picture quality in proportion to the CN rate during transmission, thus contributing to the enlargement of the TV broadcast service area. At the receiving side, the action of demodulation and reconstruction is identical to that of the second receiver of the second embodiment shown in FIG. 88 and will not be explained in greater detail. In particular, the mixer 37 is modified for video signal transmission rather than data communications and will now be explained in more detail.

As described in the second embodiment, a received signal after demodulated and error corrected, is fed as a set of four components $D_{1,1}$, $D_{1,2}$, $D_{2,1}$, and $D_{2,2}$ to the mixer 37 of the second receiver 33 of FIG. 88.

FIG. 94 is a block diagram of a modified mixer 33 in which $D_{1,1}$, $D_{1,2}$, $D_{2,1}$, and $D_{2,2}$ are explained by their respective expanders 523a, 523b, 523c, and 523d to an LL, and LH, an HL, and an HH signal respectively which are equivalent to those described with FIG. 93. If the bandwidth of the input signal is 1, LL has a bandwidth of $1/4$, LL+LH has a bandwidth of $1/2$, LL+LH+HL has a bandwidth of $3/4$, and LL+LH+HL+HH has a bandwidth of 1. The LH signal is then divided by a divider 531a and mixed by a video mixer

Also, as shown in FIG. 95, the four different level components LL, LH, HL, and HH are accumulated in proportion to the C/N rate. More specifically, the quality of a reproduced picture will be increased as the distance from a transmitter antenna becomes small. When $L=L_d$, LL component is reproduced. When $L=L_c$, LL+LH signal is reproduced. When $L=L_b$, LL+LH+HL signal is reproduced. When $L=L_a$, LL+LH+HL+HH signal is reproduced. As the result, if the bandwidth of the original signal is 1, the picture quality is enhanced at $1/4$ increments of bandwidth from $1/4$ to 1 depending on the receiving area. If the original signal is an HDTV of 1000-line vertical resolution, a reproduced TV signal is 250, 500, 750, and 1000 lines in the resolution at their respective receiving areas. The picture quality will thus be varied at steps depending on the level of a signal. FIG. 96 shows the signal propagation of a conventional digital HDTV signal transmission system, in which no signal reproduction will be possible when the C/N rate is less than V0. Also, signal interception will hardly be guaranteed at signal interference regions, shadow regions, and other signal attenuating regions, denoted by the symbol x, of the service area. FIG. 97 shows the signal propagation of an HDTV signal transmission system of the present invention. As shown, the picture quality will be a full 1000-line grade at the distance L_a where $C/N=a$, a 750-line grade at the distance L_b where $C/N=b$, a 500-line grade at the distance L_c where $C/N=c$, and a 250-line grade at the distance L_d where $C/N=d$. Within the distance L_a , there are shown unfavorable regions where the C/N rate drops sharply and no HDTV quality picture will be reproduced. As understood, a lower picture quality signal can however be intercepted and reproduced according to the multi-level signal transmission system of the present invention. For example, the picture quality will be a 750-line grade at the point B in a building shadow area, a 250-line grade at the point D in a running train, a 750-line grade at the point F in a ghost developing area, a 250-line grade at the point G in a running car, a 250-line grade at the point L in a neighbor signal interference area. As set forth above, the signal transmission system of the present invention allows a TV signal to be successfully received at a grade in the area where the conventional system is poorly qualified, thus increasing its service area. FIG. 98 shown an example of simultaneous broadcasting of four different TV programs, in which three quality programs

C, B, A are transmitted on their respective channels $D_{1,2}$, $D_{2,1}$, $D_{2,2}$ while a program D identical to that of a local analogue TV station is propagated on the $D_{1,1}$ channel. Accordingly, while the program D is kept available at simulcast service, the other three programs can also be distributed on air for offering a multiple program broadcast service.

EMBODIMENT 8

Hereinafter, an eighth embodiment of the present invention will be explained referring to the drawings. The eighth embodiment employs a multi-level signal transmission system of the present invention for a transmitter/receiver in a cellular telephone system.

FIG. 115 is a block diagram showing a transmitter/receiver of a portable telephone, in which a telephone conversation sound inputted across a microphone 76 2 is compressed and coded in a compressor 405 into multi-level, D_1 , D_2 , and D_3 , data previously described. These D_1 , D_2 , and D_3 data are time divided in a time division circuit 765 into predetermined time slots and, then, modulated in a modulator 4 into a multi-level, e.g. SRQAM, signal previously described. Thereafter, an antenna sharing unit 764 and an antenna 22 transmit a carrier wave carrying a modulated signal, which will be intercepted by a base station later described and further transmitted to other base stations or a central telephone exchanger so as to communicate with other telephones.

On the contrary, the antenna 22 receives transmission radio waves from other base stations as communication signals from other telephones. A received signal is demodulated in a multiple-level, e.g. SRQAM, type demodulator 45 into D_1 , D_2 , and D_3 data. A timing circuit 767 detects timing signals on the basis of demodulated signals. These timing signals are fed into the time division circuit 765. Demodulated signals D_1 , D_2 , and D_3 are fed into an expander 503 and expanded into a sound signal, which are transmitted to a speaker 763 and converted into sound.

FIG. 116 shows a block diagram exemplarily showing an arrangement of base stations, in which three base stations 771, 772, and 773 locate at center of respective receiving cells 768, 769, and 770 of hexagon or circle. These base stations 771, 772, and 773 respectively has a plurality of transmitter/receiver units 761a-761j each similar to that of FIG. 115 so as to have data communication channels equivalent to the number of these transmitter/receiver units. A base station controller 774 is connected to all the base stations and always monitors a communication traffic amount of each base station. Based on the monitoring result, the base station controller 774 carries out an overall system control including allocation of channel frequencies to respective base stations or control of receiving cells of respective base stations.

FIG. 117 is a view showing a traffic distribution of communication amount in a conventional, e.g. QPSK, system. A diagram d=A shows data 774a and 774b having frequency utilization efficiency 2 bit/Hz, and a diagram d=B shows data 774c of frequency utilization efficiency 2 bit/Hz. A summation of these data 774a, 774b, and 774c becomes a data 774d, which represents a transmission amount of A_{ch} consisting of receiving cells 768 and 770. Frequency utilization efficiency of 2 bit/Hz is uniformly distributed. However, density of population in an actual urban area is locally high in several crowded areas 775a, 775b, and 775c which includes buildings concentrated. A data 774e representing a

Furthermore, 4 SRQAM type transmitter/receiver, whose circuit configuration is simplified as shown in a block

diagram of FIG. 121, will be able to communicate with other telephones while maintaining compatibility. That will be the same in 16 SRQAM type transmitter/receiver shown in a block diagram of FIG. 122. As a result, three different type telephones having different modulation systems will be provided. Small in size and light in weight is important for portable telephones. In this regard, the 4 SRQAM system having a simple circuit configuration will be suitable for the users who want a small and light telephone although its frequency utilization efficiency is low and therefore the cost of a call may increase. In this manner, the present invention system can suit a wide variety of usage.

As is explained above, the transmission system having a distribution like $d=A+B$ of FIG. 118, whose capacity is locally altered, is accomplished. Therefore, an overall frequency utilization efficiency will be much effectively improved if layout of base stations is determined to fit for the actual traffic amount denoted by TF. Especially, effect of the present invention will be large in a micro cell system, whose receiving cells are smaller and therefore numerous sub base stations are required. Because a large number of sub base stations can be easily installed at the place having a large traffic amount.

Next, data assignment of each time slot will be explained referring to FIG. 119, wherein FIG. 119(a) shows a conventional time slot and FIG. 119(b) shows a time slot according to the eighth embodiment. The conventional system performs a down, i.e. from a base station to a terminal station, transmission as shown in FIG. 119(a), in which a sync signal S is transmitted by a time slot 780a and transmission signals to respective terminal stations of A, B, C channels by time slots 780b, 780c, and 780d respectively at a frequency A. On the other hand, an up, i.e. from the mobile station to the base station, transmission is performed in such a manner that a sync signal S, and transmission signals of a, b, and c channels are transmitted by time slots 781a, 781b, 781c, and 781d at a frequency B.

The present invention, which is characterized by a multi-level, e.g. 64 SRQAM, signal transmission system, allows to have three-level data consisting of D_1 , D_2 , and D_3 of 2 bit/Hz as shown in FIG. 119(b). As both the A_1 and A_2 data are transmitted by 16 SRQAM, their time slots have two times the data rate as shown by slots 782b and 782c and 783b and 783c. It means the same quality sound can be transmitted half the time. Accordingly, a time width of respective time slots 782 and 782c becomes halved. In this manner, two times the transmission capacity can be acquired at the two-level region 776c shown in FIG. 118, i.e. at the vicinity of the base station.

In the same way, time slots 782g and 783g carry out the transmission/reception of E_1 data by use of a 64 SRQAM signal. As the transmission capacity is three times, one time slot can be used for three channels of E_1 , E_2 , and E_3 . This would be used for an area further close to the base station. Thus, up to three times the communication capacity can be obtained at the same frequency band. An actual transmission efficiency, however, would be reduced to 90%. It is desirable for enhancing the effect of the present invention to coincide the transmission amount distribution according to the present invention with the regional distribution of the actual traffic amount as perfect as possible.

In fact, an actual urban area consists of a crowded building district and a greenbelt zone surrounding this building area. Even an actual suburb area consists of a residential district and fields or a forest surrounding this residential district. These urban and suburb areas resemble

the distribution of the TF diagram. Thus, the application of the present invention will be effective.

FIG. 120 is a diagram showing time slots by the TDMA method, wherein FIG. 120(a) shows a conventional method and FIG. 120(b) shows the present invention. The conventional method uses time slots 786a and 786b for transmission to portable phones of A and B channels at the same frequency and time slots 787a and 787b for transmission from the same, as shown in FIG. 120(a).

On the contrary, 16 SRQAM mode of the present invention uses a time slot 788a for reception of A₁ channel and a time slot 788c for transmission to A₁ channels as shown in FIG. 120(b). A width of the time slot becomes approximately $\frac{1}{2}$. In case of 64 SRQAM mode, a time slot 788i is used for reception of D₁ channel and a time slot 788j is used for transmission to D₁ channel. A width of the time slot becomes approximately $\frac{1}{2}$.

In order to save electric power, a transmission of E₁ channel is executed by use of a normal 4 SRQAM time slot 788r while reception of E₁ channel is executed by use of a 16 SRQAM time slot 788p being a $\frac{1}{2}$ time slot. Transmission power is surely suppressed, although communication cost may increase due to a long occupation time. This will be effective for a small and light portable telephone equipped with a small battery or when the battery is almost worn out. As is described in the foregoing description, the present invention makes it possible to determine the distribution of transmission capacity so as to coincide with an actual traffic distribution, thereby increasing substantial transmission capacity. Furthermore, the present invention allows base stations or terminal stations to freely select one among two or three transmission capacities. If the frequency utilization efficiency is lowered, power consumption will be decreased. If the frequency utilization efficiency is selected higher, communication cost will be saved. Moreover, adoption of a 4 SRQAM having smaller capacity will simplify the circuitry and reduce the size and cost of the telephone. As explained in the previous embodiments, one characteristics of the present invention is that compatibility is maintained among all of associated stations. In this manner, the present invention not only increases transmission capacity but allows to provide customers a wide variety of series from a super mini telephone to a high performance telephone.

EMBODIMENT 9

Hereinafter, a ninth embodiment of the present invention will be described referring to the drawings. The ninth embodiment employs this invention in an OFDM transmission system. FIG. 123 is a block diagram of a OFDM transmitter/receiver, and FIG. 124 is a diagram showing a principle of an OFDM action. An OFDM is one of FDM and has a better efficiency in frequency utilization as compared with a general FDM, because an OFDM sets adjacent two carriers to be quadrature with each other. Furthermore, OFDM can bear multipath obstructions such as ghosts and, therefore, may be applied in the future to the digital music broadcasting or digital TV broadcasting.

As shown in the principle diagram of FIG. 124, OFDM converts an input signal by a serial to parallel converter 791 into a data being disposed on a frequency axis 793 at intervals of $1/T_s$, so as to produce subchannels 794a-794e. This signal is inversely FFT converted by a modulator 4 having an inverse FFT 40 into a signal on a time axis 79-9 to produce a transmission signal 795. This inverse FFT signal is transmitted during an effective symbol period 796

Next, an action of a receiver 43 will be described. A received signal, shown as time-base symbol signal 796e of FIG. 124, is fed into an input section 24 of FIG. 123. Then the received signal is converted into a digital signal in a demodulator 852b and further changed into Fourier coefficients in a FFT 40a. Thus, the signal is mapped from the time axis 799 to the frequency axis 793a as shown in FIG. 124. That is, the time-base symbol signal is converted into frequency-base carriers 794a, 794b,—. As these carriers are in quadrature relationship with each other, it is possible to separate respective modulated signals. FIG. 125(b) shows thus demodulated 16 SRQAM signal, which is then fed to respective C-CDM demodulators 45a, 45b,—of a C-CDM demodulator 45, in which demodulated 16 SRQAM signal is demodulated into multi-level sub signals D_1 , D_2 . These sub signals D_1 and D_2 are further demodulated by a D_1 parallel

to serial converter 852a and a D_2 parallel to serial converter 852b into original D_1 and D_2 signals.

Since the signal transmission system is of C-CDM multi-level shown in 125(b), both D_1 and D_2 signals will be demodulated under better receiving condition but only D_1 signal will be demodulated under worse, e.g. low C/N rate, receiving condition. Demodulated D_1 signal is demodulated in an output section 757. As $D_{1,1}$ signal has higher ECC code gain as compared with the $D_{1,2}$ signal, an error signal of the $D_{1,1}$ signal is reproduced even under worse receiving condition.

The $D_{1,1}$ signal is converted by a 1-1 video decoder 402c into a low frequency band signal and outputted as an LDTV, and the $D_{1,2}$ signal is converted by a 1-2 video decoder 402d into a medium frequency band signal and outputted as EDTV.

The D_2 signal is Trellis decoded by a Trellis decoder 759b and converted by a second video decoder 402b into a high frequency band signal and outputted as an HDTV signal. Namely, an LDTV signal is outputted in case of the low frequency band signal only. An EDTV signal of a wide NTSC grade is outputted if the medium frequency band signal is added to the low frequency band signal, and an HDTV signal is produced by adding low, medium, and high frequency band signals. As well as the previous embodiment, a TV signal having a picture quality depending on a receiving C/N rate can be received. Thus, the ninth embodiment realizes a novel multi-level signal transmission system by combining an OFDM and a C-CDM, which was not obtained by the OFDM alone.

An OFDM is certainly strong against multipath such as TV ghost because the guard time T_g can absorb an interference signal of multipath. Accordingly, the OFDM is applicable to the digital TV broadcasting for automotive vehicle TV receivers. Meanwhile, no OFDM signal is received when the C/N rate is less than a predetermined value because its signal transmission pattern is non of a multi-level type.

However the present invention can solve this disadvantage by combining the OFDM with the C-CDM, thus realizing a gradational degradation depending on the C/N rate in a video signal reception without being disturbed by multipath.

When a TV signal is received in a compartment of vehicle, not only the reception is disturbed by multipath but the C/N rate is deteriorated. Therefore, the broadcast service area of a TV broadcast station will not be expanded as expected if the countermeasure is only for multipath.

On the other hand, a reception of TV signal of at least LDTV grade will be ensured by the combination with the multi-level transmission C-CDM even if the C/N rate is fairly deteriorated. As a picture plane size of an automotive vehicle TV is normally less than 10 inches, a TV signal of an LDTV grade will provide a satisfactory picture quality. Thus, the LDTV grade service area of automotive vehicle TV will largely expanded. If an OFDM is used in an entire frequency band of HDTV signal, present semiconductor technologies cannot prevent circuitry scale from increasing so far.

Now, an OFDM method of transmitting only $D_{1,1}$ of low frequency band TV signal will be explained below. As shown in a block diagram in FIG. 138, a medium frequency band component $D_{1,2}$ and a high frequency band component D_2 of an HDTV signal are multiplexed in C-CDM modulator 4a, and then transmitted at a frequency band A through an FDM 40d.

On the other hand, a signal received by a receiver 43 is first of all frequency separated by an FDM 40e and, then, demodulated by a C-CDM demodulator 4b of the present invention. Thereafter, thus C-CDM demodulated signal is reproduced into medium and high frequency components of HDTV in the same way as in FIG. 123. An operation of a video decoder 402 is identical to that of embodiments 1, 2, and 3 and will not be explained in greater detail.

Meanwhile, the $D_{1,1}$ signal, a low frequency band signal of MPEG 1 grade of HDTV, is converted by a serial to parallel converter 791 into a parallel signal and fed to an OFDM modulator 852c, which executes QPSK or 16 QAM modulation. Subsequently, the $D_{1,1}$ signal is converted by an inverse FFT 40 into a time-base signal and transmitted at a frequency band B through a FDM 40d.

On the other hand, a signal received by the receiver 43 is frequency separated in the FDM 40e and then converted into a number of frequency-base signals in an FFT 40a of an OFDM modulator 852d. Thereafter, frequency-base signals are demodulated in respective demodulators 4a, 4b,—and are fed into a parallel to serial converter 882a, wherein a $D_{1,1}$ signal is demodulated. Thus, a $D_{1,1}$ signal of LDTV grade is outputted from the receiver 43.

In this manner, only an LDTV signal is OFDM modulated in the multi-level signal transmission. The method of FIG. 138 makes it possible to provide a complicated OFDM circuit only for an LDTV signal. A bit rate of LDTV signal is $\frac{1}{2}$ of that of an HDTV. Therefore, the circuit scale of the OFDM will be reduced to $\frac{1}{2}$, which results in an outstanding reduction of overall circuit scale.

An OFDM signal transmission system is strong against multipath and will soon be applied to a moving station, such as a portable TV, an automotive vehicle TV, or a digital music broadcast receiver, which is exposed under strong and variable multipath obstruction. For such usages a small picture size of less than 10 inches, 4 to 8 inches, is the mainstream. It will be thus guessed that the OFDM modulation of a high resolution TV signal such as HDTV or EDTV will bring less effect. In other words, the reception of a TV signal of LDTV grade would be sufficient for an automotive vehicle TV.

On the contrary, multipath is constant at a fixed station such as a home TV. Therefore, a countermeasure against multipath is relatively easy. Less effect will be brought to such a fixed station by OFDM unless it is in a ghost area. Using OFDM for medium and high frequency band components of HDTV is not advantageous in view of present circuit scale of OFDM which is still large.

Accordingly, the method of the present invention, in which OFDM is used only for a low frequency band TV signal as shown in FIG. 138, can widely reduce the circuit scale of the OFDM to less than $\frac{1}{10}$ without losing inherent OFDM effect capable of largely reducing multiple obstruction of LDTV when received at a mobile station such as an automotive vehicle.

Although the OFDM modulation of FIG. 138 is performed only for $D_{1,1}$ signal, it is also possible to modulate both $D_{1,1}$ and $D_{1,2}$ by OFDM. In such a case, a C-CDM two-level signal transmission is used for transmission of $D_{1,1}$ and $D_{1,2}$. Thus, a multi-level broadcasting being strong against multipath will be realized for a vehicle such as an automotive vehicle. Even in a vehicle, the gradual graduation will be realized in such a manner that LDTV and SDTV signals are received with picture qualities depending on receiving signal level or antenna sensitivity.

The multi-level signal transmission according to the present invention is feasible in this manner and produces

FIG. 126(a) shows another method of realizing the multi-level signal transmission system, wherein the subchannels 794a-794c of the OFDM are assigned to a first layer 801a and the subchannels 794d-794f are assigned to a second layer 801b. There is provided a frequency guard zone 802a of f_g between these two, first and second, layers. FIG. 126(b) shows an electric power difference 802b of P_g which is provided to differentiate the transmission power of the first and second layers 801a and 801b.

FIG. 144 shows a specific circuit, wherein the first layer data passing through the first data stream circuit 791a is modulated into the carriers f_1 - f_3 by the modulators 4a-4c having large amplitude and, then, are OFDM modulated in the inverse FFT 40. On the contrary, the second layer data passing through the second data stream circuit 791b is modulated into the carriers f_6 - f_8 by the modulators 4d-4f having ordinary amplitude and, then, are OFDM modulated in the inverse FFT 40. Then, these OFDM modulated signals are transmitted from the transmit circuit 5.

The first layer 801a has so large electrical power that it can be received even in a weak-signal area. In this manner, the PW-OFDM system realizes the two-layer multi-level signal transmission. If this PW-OFDM is combined with the C-CDM, it will become possible to provide 3-4 layers. As the circuit of FIG. 144 is identical with the circuit of FIG. 123 in the remaining operations and, therefore, will not be explained in greater detail.

Next, a method of realizing a multi-level signal transmission in Time-Weighted-OFDM (i.e. TW-OFDM) in accordance with the present invention will be explained. Although the OFDM System is accompanied with the guard time zone t_g , as previously described, adverse affects of ghosts will be eliminated if the delay time t_M of the ghost, i.e. multipath, signal satisfies the requirement of $t_M < t_g$. The delay time t_M will be relatively small, for example in the range of several microseconds, in a fixed station such as a TV receiver used for home use. Furthermore, as its value is constant, cancellation of ghosts will be relatively easily done. On the

An affection of the multipath will be explained in more detail. In case of multipath 810a, 810b, 810c, and 810d having shorter delay time as shown in FIG. 145(a), the signals of both the first and second layers can be received and therefore the HDTV signal can be demodulated. On the contrary, in case of multipath 811a, 811b, 811c, and 811d having longer delay time as shown in FIG. 145(b), the B signal of the second layer cannot be received since its guard time t_{gs} is not sufficiently long. However, the A signal of the first layer can be received without being bothered by the

Such a discrimination of the guard time and the symbol time is effective to realize two-dimensional multi-layer signal transmission of the OFDM in a simple manner. If the discrimination of guard time is combined with the C-CDM in the circuit shown in FIG. 123, the multi-layer signal transmission effective against both multipath and deterioration of C/N ratio will be realized.

The smaller the D/U ratio of the receiving signal becomes, the larger the multipath delay time T_M becomes. Because, the reflected wave increases compared with the direct wave. For example, as shown in FIG. 148, if the D/U ratio is smaller than 30 dB, the delay time T_M exceeds 30 μ s because of increase of the reflected wave. Therefore, as can be understood from FIG. 148, it will become possible to receive the signal even in the worst condition if the T_g is set to be larger than 50 μ s.

If the GTW-OFDM is applied to ass the picture quality, it is doubtless

A timing chart of a three level (HDTV, SDTV, LDTV) television signal in a two-dimensional multilevel broadcast

of three C/N levels and three multipath levels is shown in FIG. 152. As shown in the figure, the LDTV signal is positioned in slot 796a1 of the first level of level A, the level with the greatest resistance to multipath interference; the SDTV synchronization signal, address signal, and other important high priority signals are positioned in slot 796a2, which has the next greatest resistance to multipath interference, and slot 796b1, which has strong resistance to C/N deterioration. The SDTV common signal, i.e., low priority signals, and HDTV high priority signals are positioned in levels 2 and 3 of level B. SDTV, EDTV, HDTV, and other high frequency component television signals are positioned in levels 1, 2, and 3 of level C.

As the resistance to C/N deterioration and multipath interference increases, the transmission rate drops, causing the TV signal resolution to drop, and achieving the three-dimensional graceful degradation effect shown in FIG. 153 and unobtainable with conventional methods. As shown in FIG. 153, the three-dimensional multilevel broadcast structure of the invention is achieved with three parameters: C/N ratio, multipath delay time, and the transmission rate.

The present embodiment has been described using the example of a two-dimensional multilevel broadcast structure obtained by combining GTW-OFDM of the invention with C-CDM of the invention as previously described, or combining GTW-OFDM, CSW-C-CDM, but other two-dimensional multilevel broadcast structures can be obtained by combining GTW-OFDM and power-weighted OFDM, or GTW-OFDM with other C/N ratio multilevel transmission methods.

FIG. 154 is obtained by transmitting the power of carriers 794a, 794c, and 794e with less weighting compared with carriers 794b, 794d, and 794f, achieving a two level power-weighted OFDM. Two levels are obtained by power weighting carriers 795a and 795c, which are perpendicular to carrier 794a, to carriers 795b and 795d. While a total of four levels are obtained, the embodiment having only two levels is shown in FIG. 154. As shown in the figure, because the carrier frequencies are distributed, interference with other analog transmissions on the same frequency band is dispersed, and there is minimal adverse effect.

By using a time positioning varying the time width of guard times 797a, 797b, and 797c for each symbol 796a, 796b, and 796c as shown in FIG. 155, three-level multipath multilevel transmission can be achieved. Using the time positioning shown in FIG. 155, the A-, B-, and C-level data is distributed on the time axis. As a result, even if burst noise produced at a specific time occurs, data destruction can be prevented and the TV signal can be stably demodulated by interleaving the data from the different layers. In particular, by interleaving with the A level data distributed, interference from burst noise generated by the ignition systems of other vehicles can be significantly reduced in mobile TV receivers.

Block diagrams of a specific ECC encoder 744j and a specific ECC decoder 749j are shown in FIG. 160a and FIG. 160b, respectively. FIG. 167 is a block diagram of the deinterleaver 936b. The interleave table 954 processed in the deinterleave RAM 936a of the deinterleaver 936b is shown in FIG. 168a, and interleave distance L1 is shown in FIG. 168b.

Burst noise interference can be reduced by interleaving the data in this way. By using a 4-level VSB, 8-level VSB, or 16-level VSB transmission apparatus as described in embodiments 4, 5, and 6, respectively, and shown in the VSB receiver block diagram (FIG. 161) and the VSB

transmitter block diagram (FIG. 162), or by using a QAM or PSK transmission apparatus as described in embodiments 1 and 2, respectively, burst noise interference can be reduced, and television reception with very low noise levels can be achieved in ground station broadcasting.

By using 3-level broadcasting by means of the method shown in FIG. 155, LDTV grade television reception by mobile receivers, including mobile TV receivers in motor vehicles and hand-held portable television sets, can be stabilized because level A has the effect of reducing burst noise interference in addition to multipath interference and C/N ratio deterioration.

The multi-level signal transmission method of the present invention is intended to increase the utilization of frequencies but may be suited for not all the transmission systems since causing some type receivers to be declined in the energy utilization. It is a good idea for use with a satellite communications system for selected subscribers to employ most advanced transmitters and receivers designed for best utilization of applicable frequencies and energy. Such a specific purpose signal transmission system will not be bound by the present invention.

The present invention will be advantageous for use with a satellite or terrestrial broadcast service which is essential to run in the same standards for as long as 50 years. During the service period, the broadcast standards must not be altered but improvements will be provided time to time corresponding to up-to-date technological achievements. Particularly, the energy for signal transmission will surely be increased on any satellite. Each TV station should provide a compatible service for guaranteeing TV program signal reception to any type receivers ranging from today's common ones to future advanced ones. The signal transmission system of the present invention can provide a compatible broadcast service of both the existing NTSC and HDTV systems and also, ensure a future extension to match mass data transmission.

The present invention concerns much on the frequency utilization than the energy utilization. The signal receiving sensitivity of each receiver is arranged different depending on a signal state level to be received so that the transmitting power of a transmitter needs not be increased largely. Hence, existing satellites which offer a small energy for reception and transmission of a signal can best be used with the system of the present invention. The system is also arranged for performing the same standards corresponding to an increase in the transmission energy in the future and offering the compatibility between old and new type receivers. In addition, the present invention will be more advantageous for use with the satellite broadcast standards.

The multi-level signal transmission method of the present invention is more preferably employed for terrestrial TV broadcast service in which the energy utilization is not crucial, as compared with satellite broadcast service. The results are such that the signal attenuating regions in a service area which are attributed to a conventional digital HDTV broadcast system are considerably reduced in extension and also, the compatibility of an HDTV receiver or display with the existing NTSC system is obtained. Furthermore, the service area is substantially increased so that program suppliers and sponsors can appreciate more viewers. Although the embodiments of the present invention refer to 16 and 32 QAM procedures, other modulation techniques including 64, 128, and 256 QAM will be employed with equal success. Also, multiple PSK, ASK, and FSK techniques will be applicable as described with the embodiments.

What is claimed is:

said transmitter comprising:

an error correction encoding means for adding an error correction code to the digital video compression signal to produce an error correction coded signal;

a transmission means for transmitting the modulation signal, and

a means for receiving a transmitted n-level VSB modulation signal;

an error correction means for error correcting the digital reception signal to obtain an error-corrected digital signal; and

an expanding means for expanding the error-corrected digital signal to obtain a video output signal.

3. A transmission and reception apparatus according to claim 2, wherein the trellis decoder is associated with a plurality of memories which each holds a number of selectable correct codes.

4. A transmission and reception apparatus according to claim 1, wherein the digital reception signal is divided into a high priority signal and a low priority signal, and wherein said error correction means comprises a high code gain first error correction means and a low code gain second error correction means, said first error correction means correcting the high priority signal.

5. A transmission and reception apparatus according to claim 4, wherein the high priority signal carries the address data for all data.

6 A transmission and reception apparatus according to claim 4, wherein the first error correction means comprises a trellis decoder.

7 A signal transmission and reception apparatus according to claim 1, further comprising a band path filtering means for filtering the n-level VSB modulation signal before being transmitted.

8. A signal transmission and reception apparatus for transmitting an n -level VSB signal, comprising:

a compression means for compressing an input video signal into a digital video compression signal.

an error correction encoding means for adding an error correction code to the digital video compression signal to produce an error correction coded signal;

a modulation means for modulating the error correction coded signal to an n-level VSB modulation signal, said modulation means comprising a means for allocating code points along a uniaxial modulation coordinate system, and a filter means having a plurality of coefficients which are a series of impulse responses defined by plotting timebase responses to the VSB modulation signal along the in-phase axis and its orthogonal axis for filtering a series of said code points allocated along the uniaxial modulation coordinate system, and

a transmission means for transmitting the modulation signal.

9. A signal transmission apparatus according to claim 8, further comprising a band path filtering means for filtering the n-level VSB modulation signal before being transmitted.

10. A signal receiving apparatus comprising:

a tuner for receiving a transmission signal containing a digital modulation signal and an analog modulation signal and for selecting the digital modulation signal using a local oscillation signal;

an interference detecting means for detecting interference caused by the analog modulation signal from the digital modulation signal selected by the tuner;

a notch filter means responsive to the interference detected by the interference detecting means for removing a carrier of the analog modulation signal in a same frequency band as a frequency band of the digital modulation signal;

an error ratio calculating means for calculating a bit error ratio of an output of the notch filter means; and

an automatic frequency correcting means for changing a frequency of the local oscillation signal of the tuner according to a level of the interference detected by the interference detecting means and the bit error ratio calculated by the error ratio calculating means to compensate for a frequency offset of the carrier of the analog modulated signal.

11. A signal receiving apparatus according to claim 10, wherein the digital modulation signal is an n-level VSB modulation signal.

12. A signal receiving apparatus comprising:

a tuner for receiving a transmission signal containing at least one of a VSB modulated signal and a QAM modulated signal and for selecting one of the VSB modulated signal and the QAM modulated signal to obtain a selected signal;

an analog-to-digital converter for converting the selected signal into a series of digital codes;

a transversal filter provided on an orthogonal axis for suppressing a transmission distortion of the series of digital codes with respect to both orthogonal axes to obtain a series of filtered digital codes allocated on the orthogonal axes;

a carrier recovery means for phase-compensating a carrier of the filtered digital codes allocated on the orthogonal axis outputted from the transversal filter, and

a control means for producing a control signal to extract detected codes at equal time intervals from the VSB modulated signal,

a clock reproducing means for phase synchronizing entire codes of the QAM modulated signal when the selected signal is the QAM modulated signal and for phase synchronizing codes of the VSB modulated signal intermittently at predetermined intervals when the selected signal is the VSB modulated signal; and

a decoding means for decoding an output of the carrier recovery means.

[57]

ABSTRACT

At the transmitter side, carrier waves are modulated according to an input signal for producing relevant signal points in a signal space diagram. The input signal is divided into, two, first and second, data streams. The signal points are divided into signal point groups to which data of the first data stream are assigned. Also, data of the second data stream are assigned to the signal points of each signal point group. A difference in the transmission error rate between first and second data streams is developed by shifting the signal points to other positions in the space diagram expressed at least in the polar coordinate system. At the receiver side, the first and/or second data streams can be reconstructed from a received signal. In TV broadcast service, a TV signal is divided by a transmitter into low and high frequency band components which are designated as first and second data streams respectively. Upon receiving the TV signal, a receiver can reproduce only the low frequency band component or both the low and high frequency band components, depending on its capability. Furthermore, a communication system based on an OFDM system is utilized for data transmission of a plurality of subchannels, wherein the subchannels are differentiated by changing the length of a guard time slot or a carrier wave interval of a symbol transmission time slot, or changing the transmission electric power of the carrier.

005257 2462950

FIG. 1

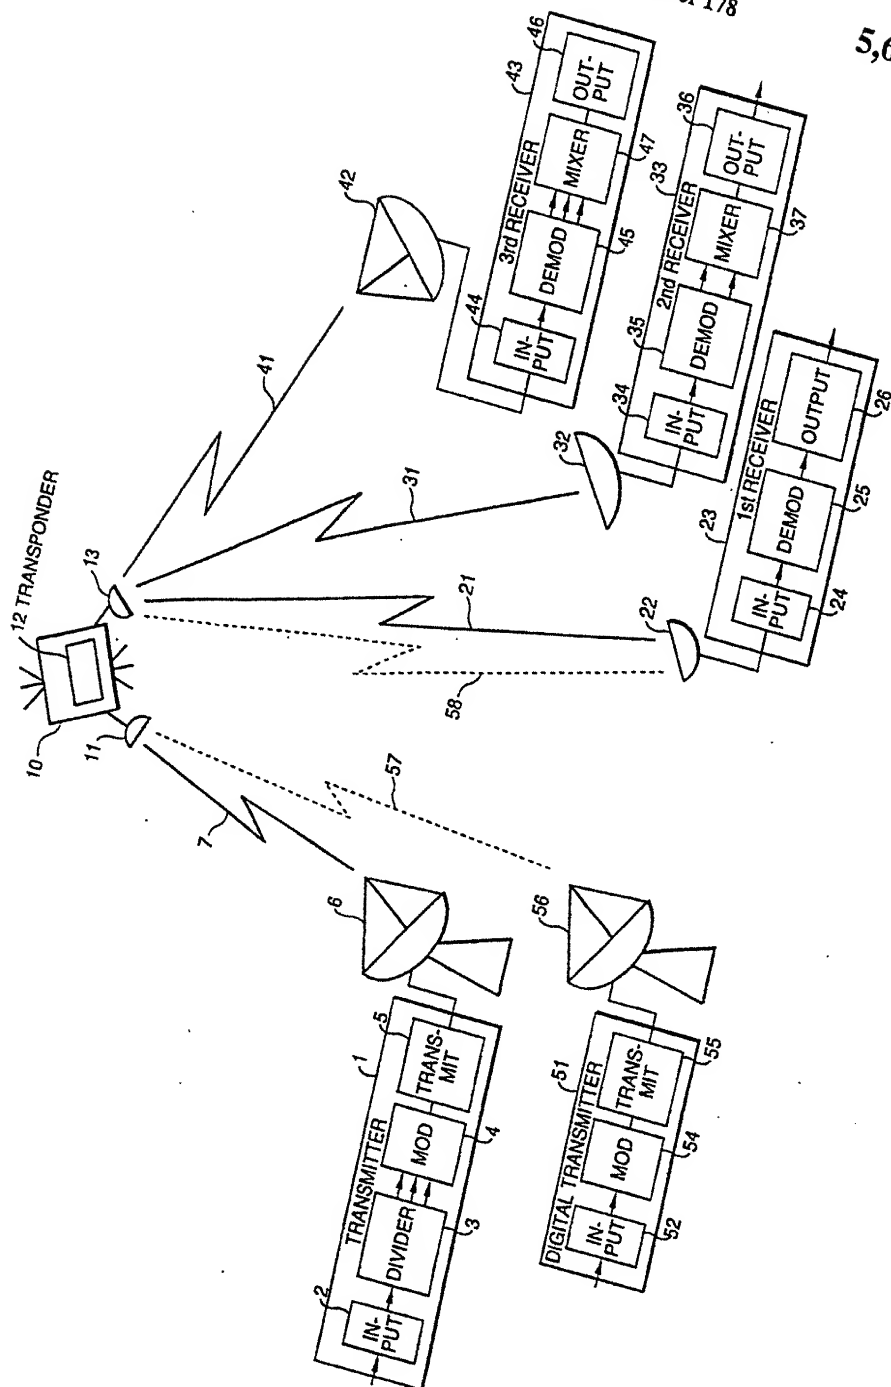


FIG. 2

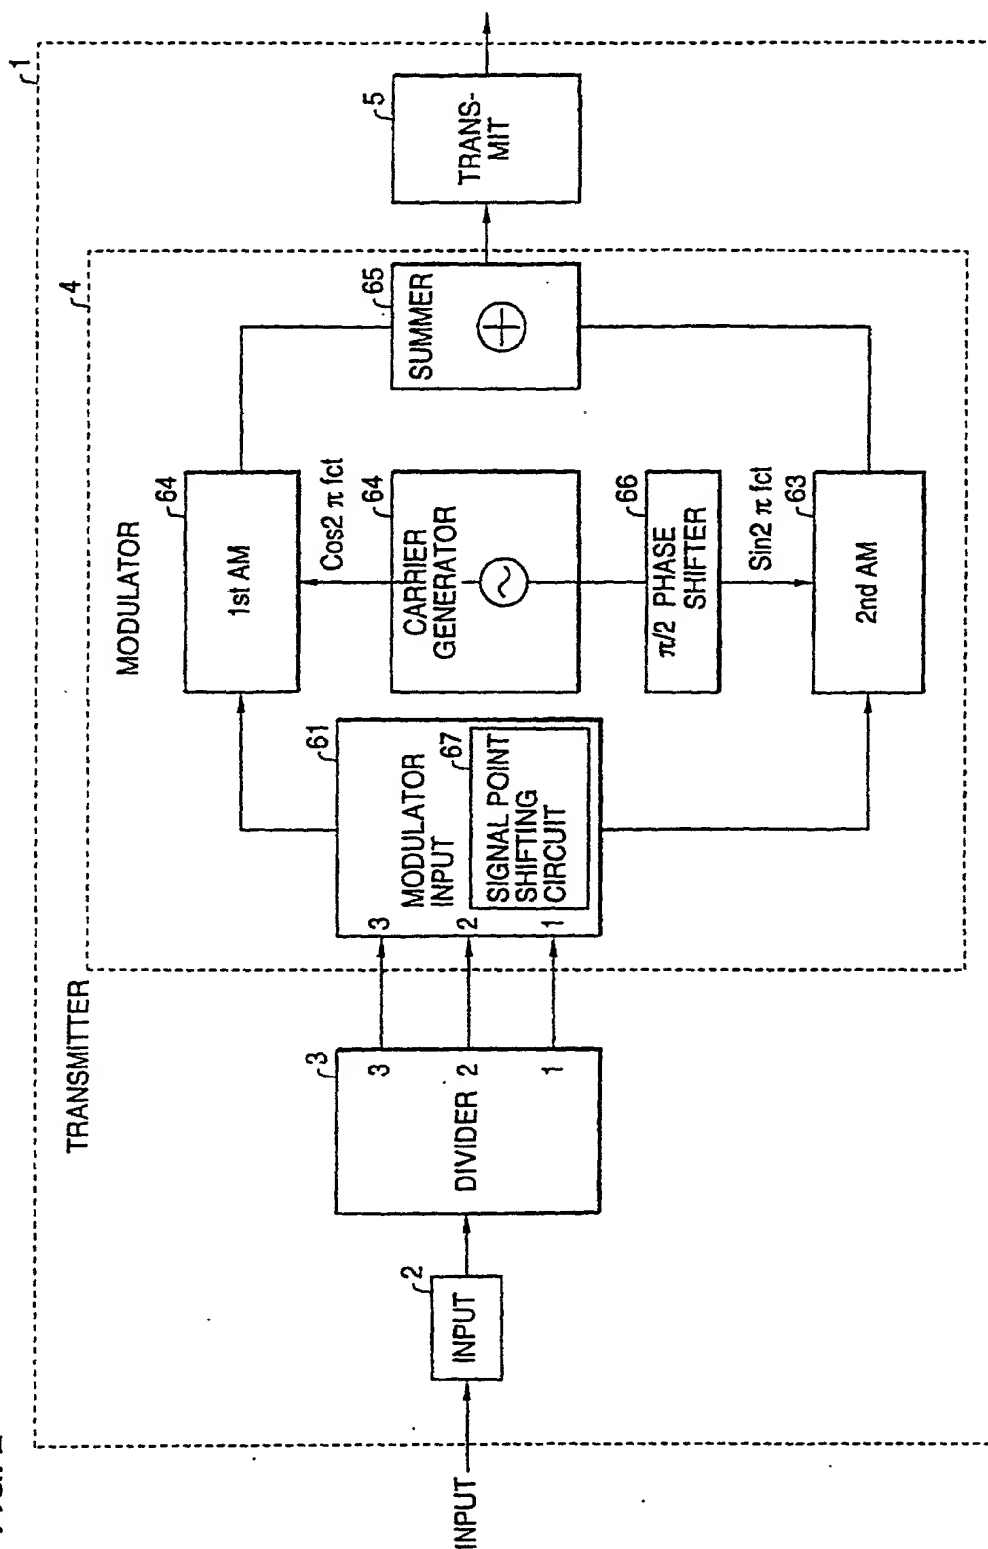


FIG. 3


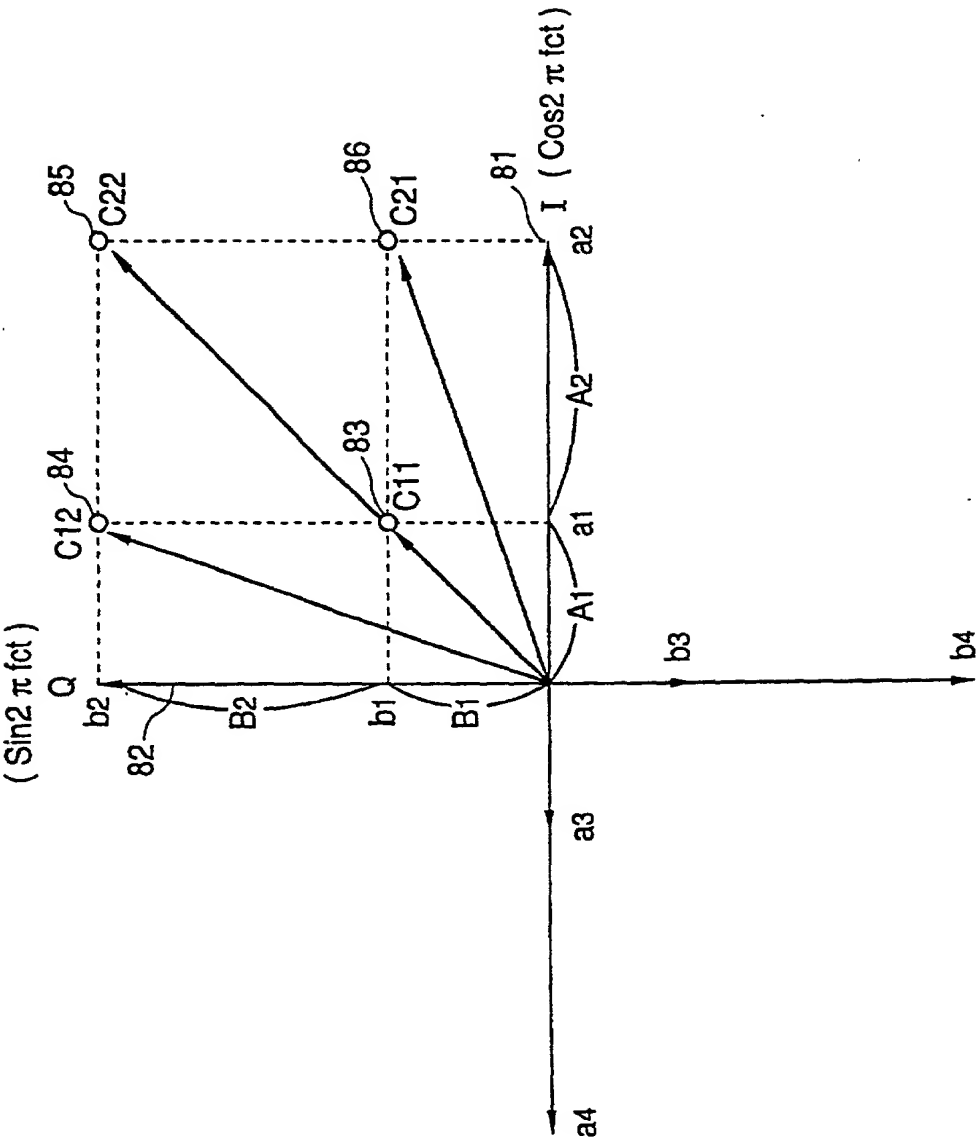


FIG. 4

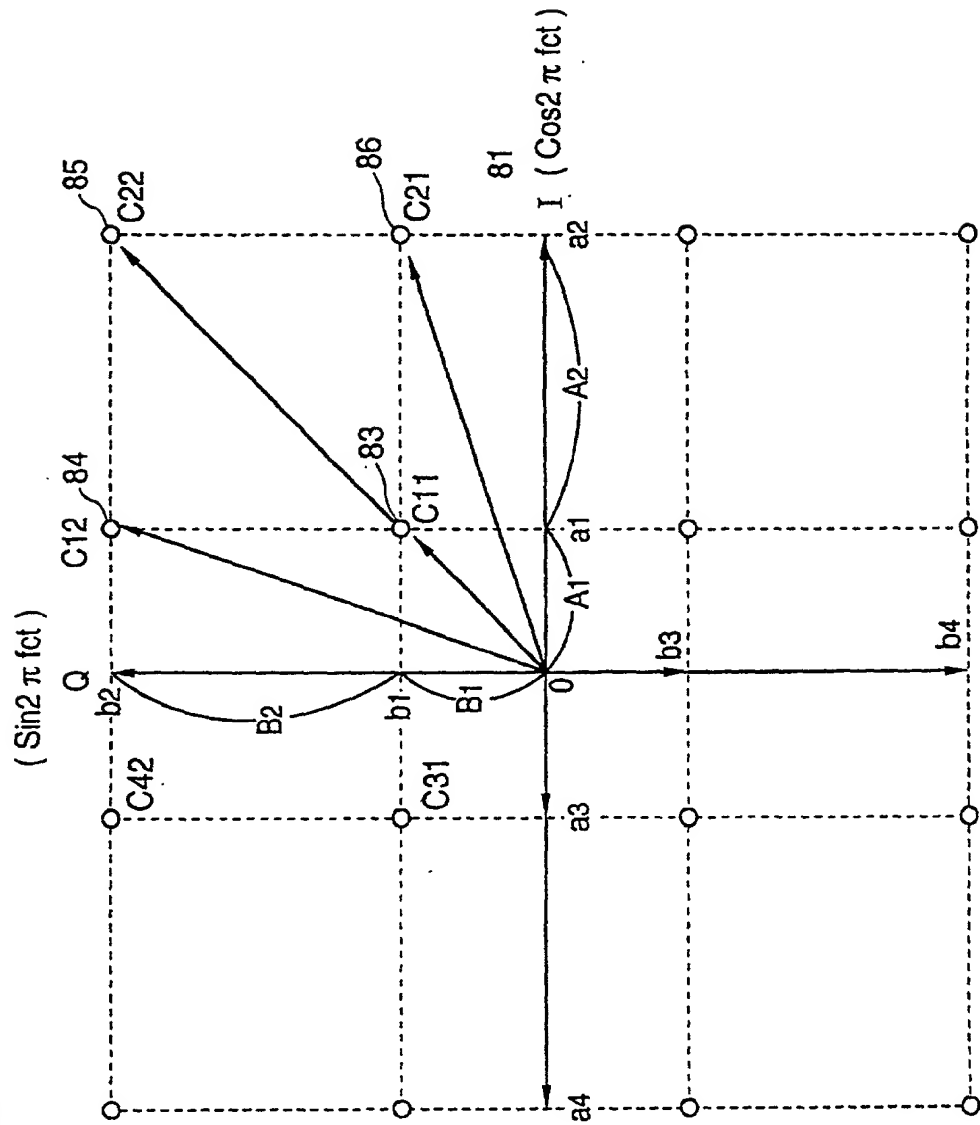


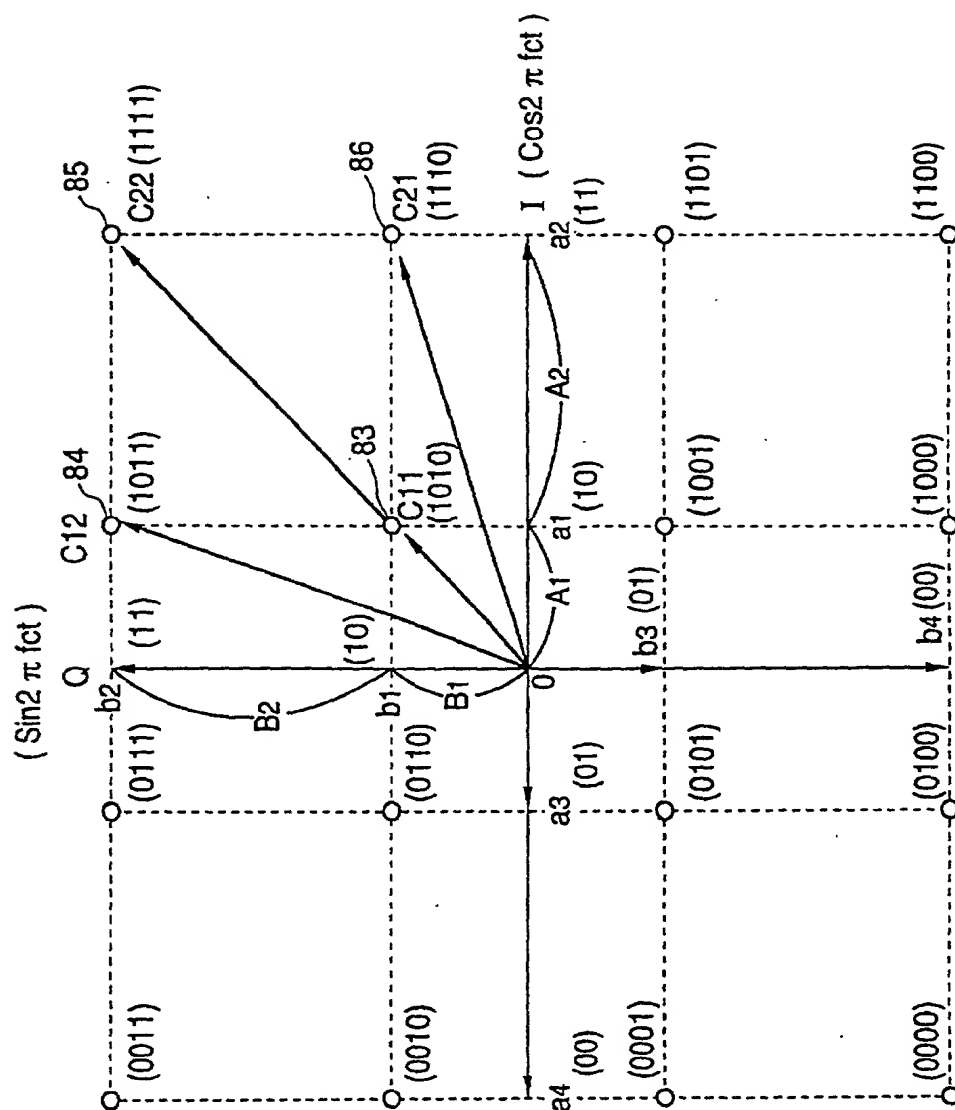


FIG. 6

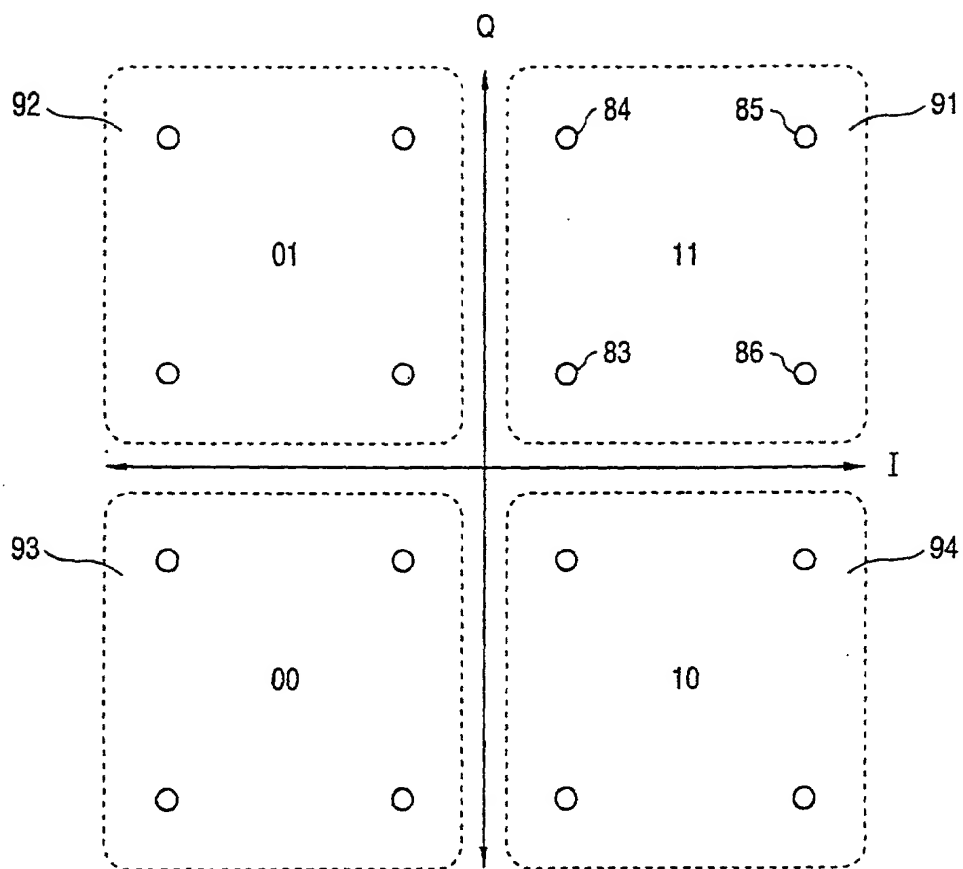

005250" 24622950

FIG. 7

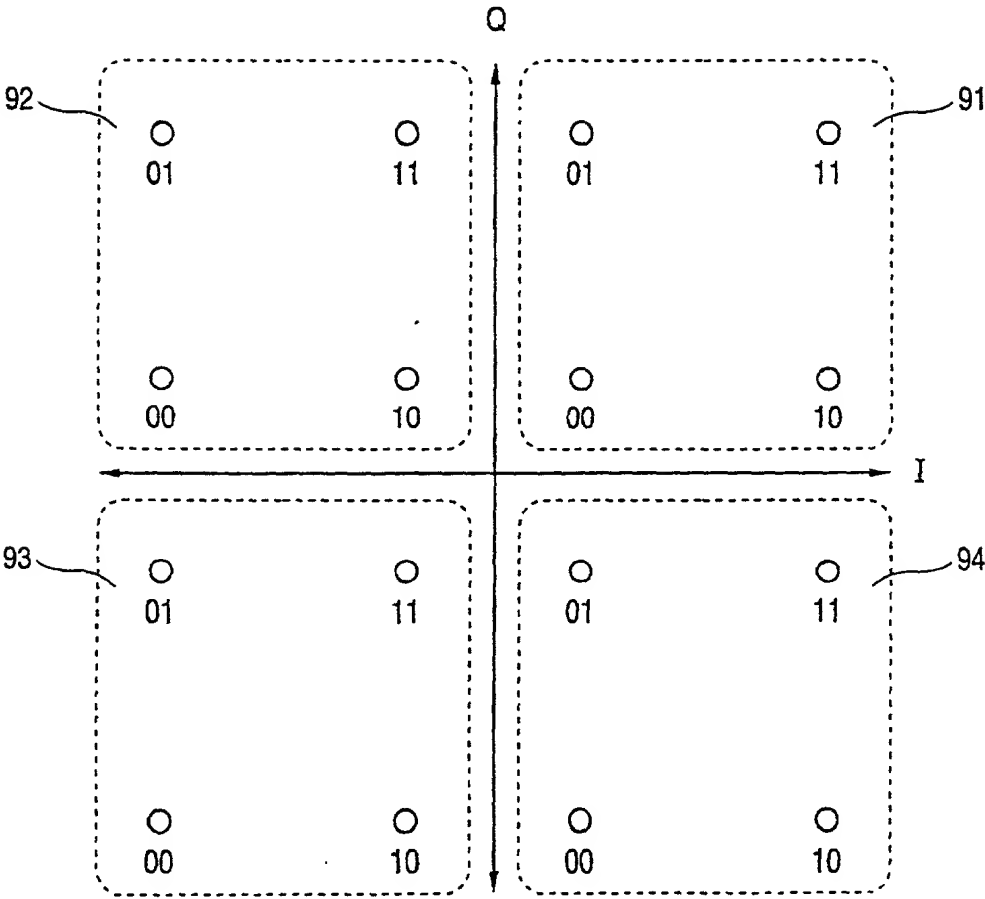


FIG. 8

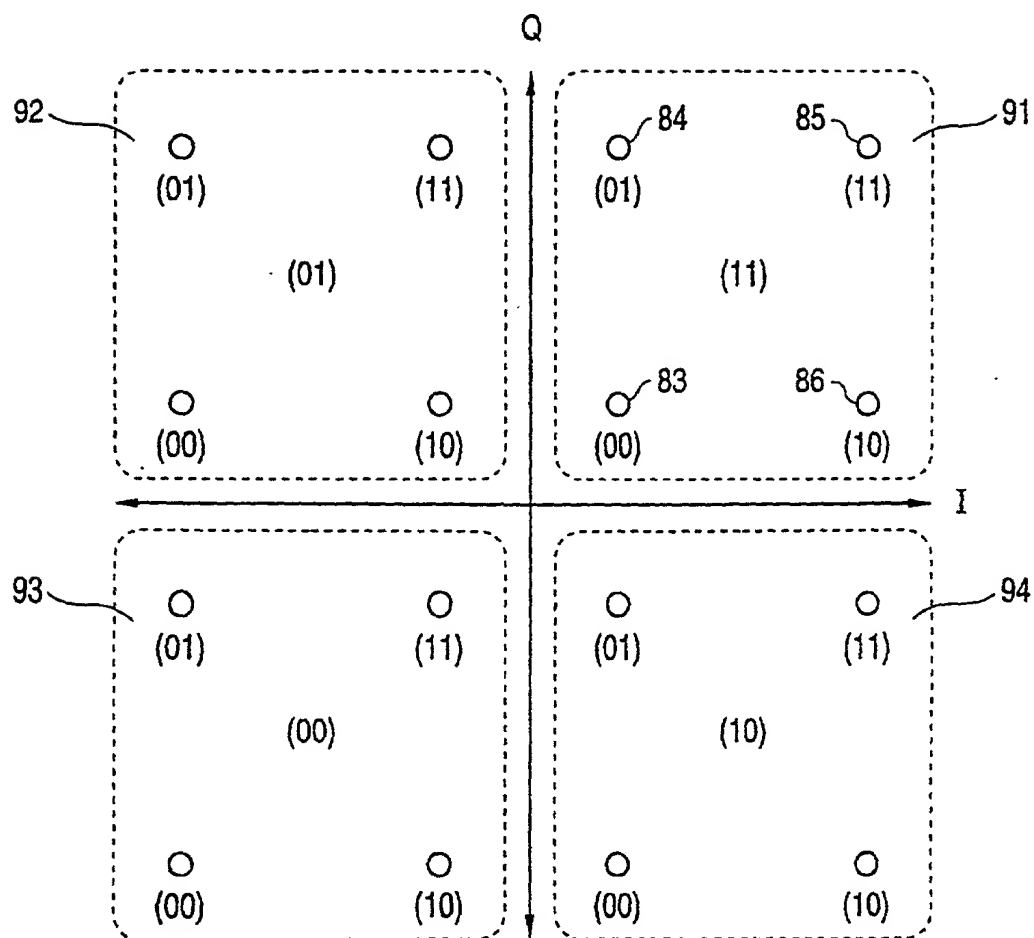


FIG. 9

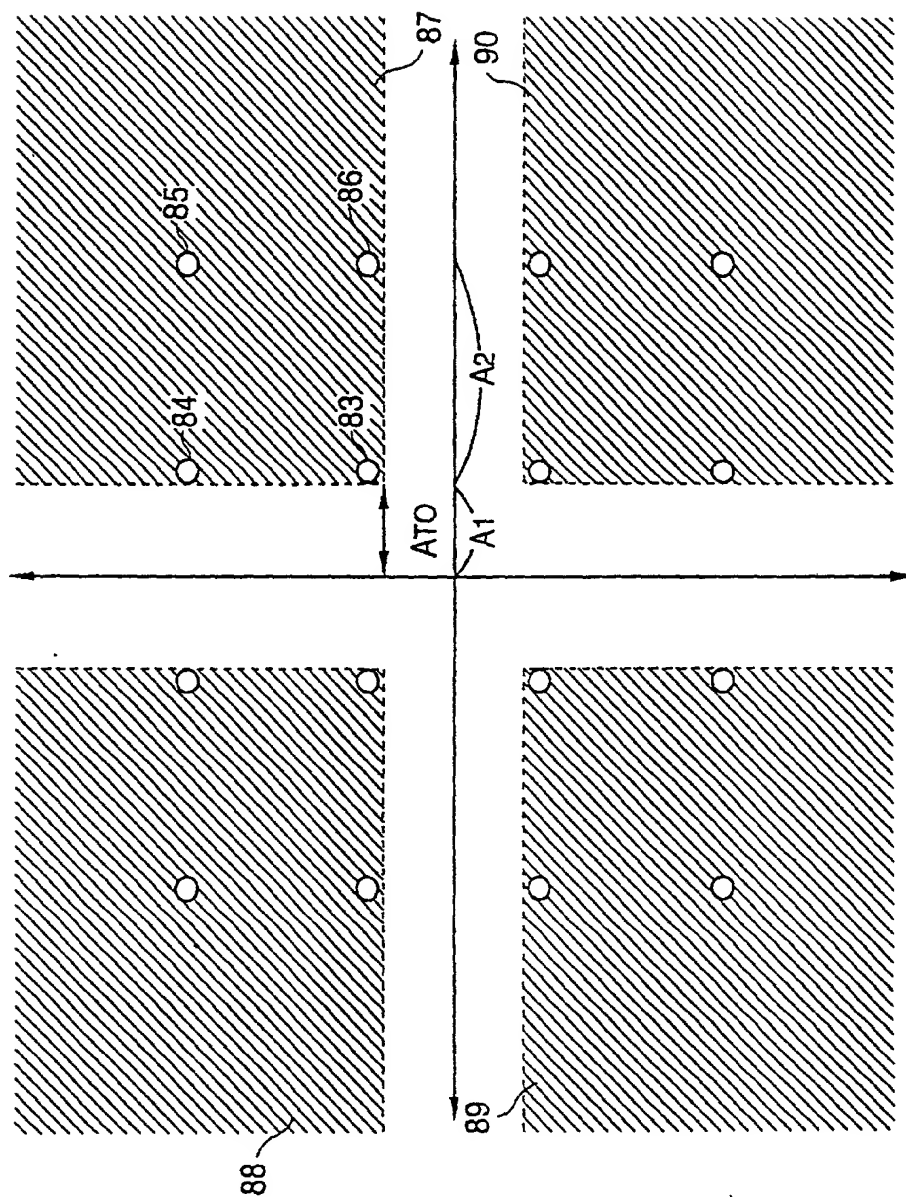


FIG. 10

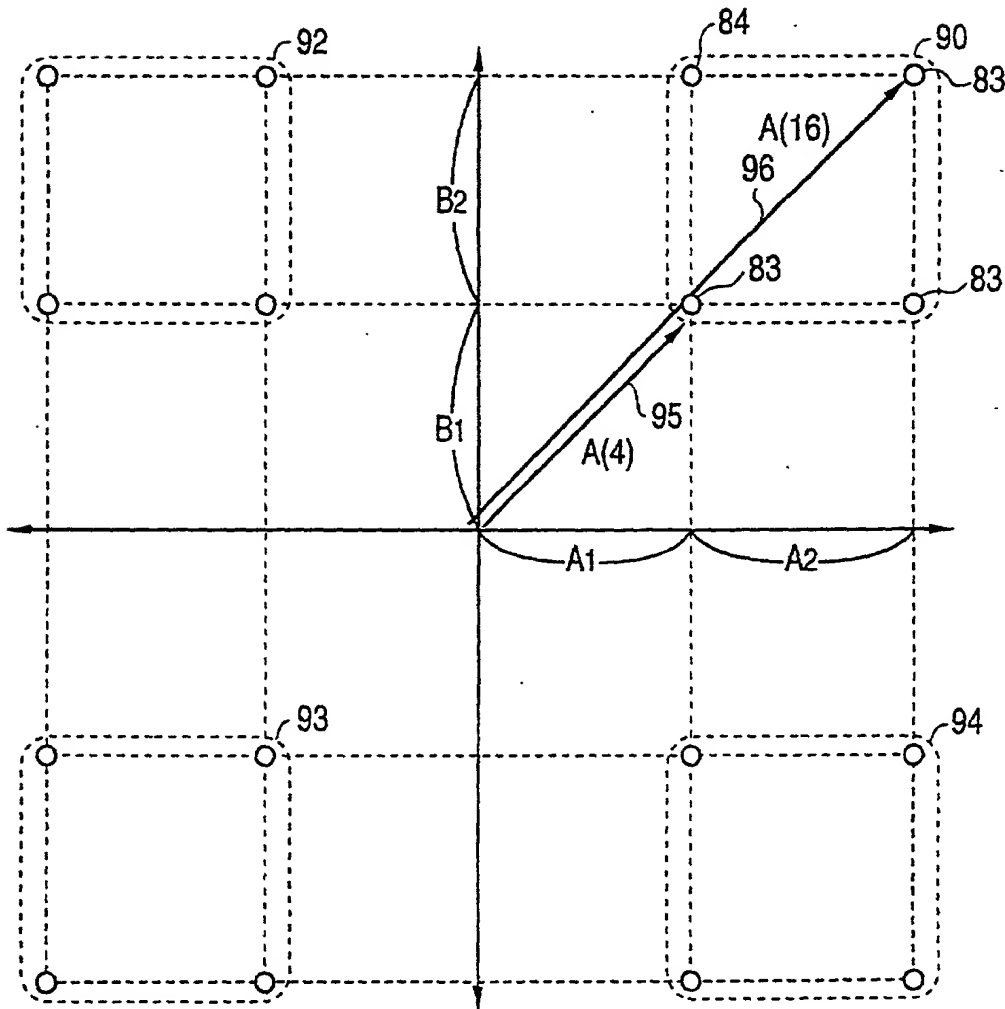


FIG. 11

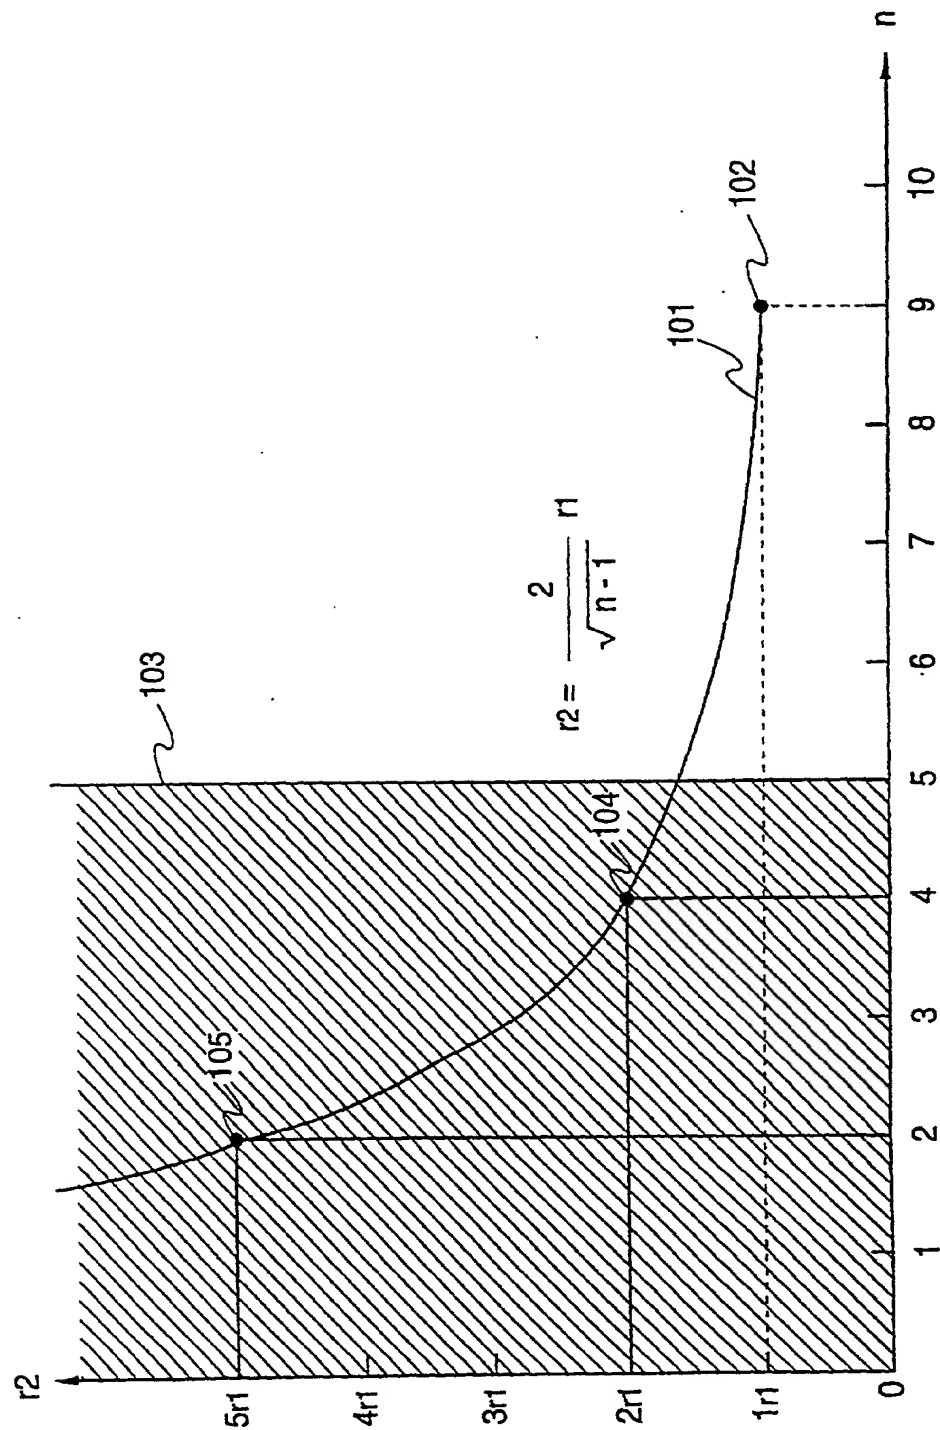


FIG. 12

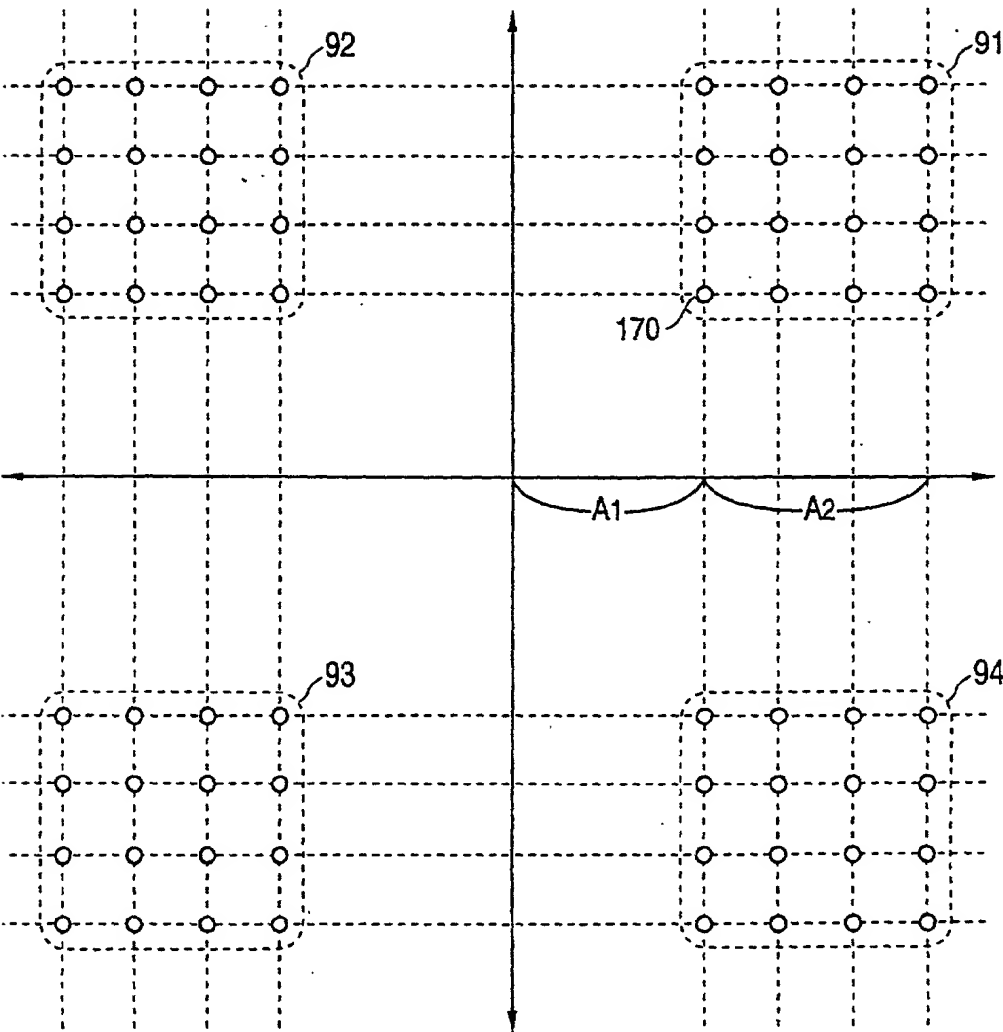


FIG. 13

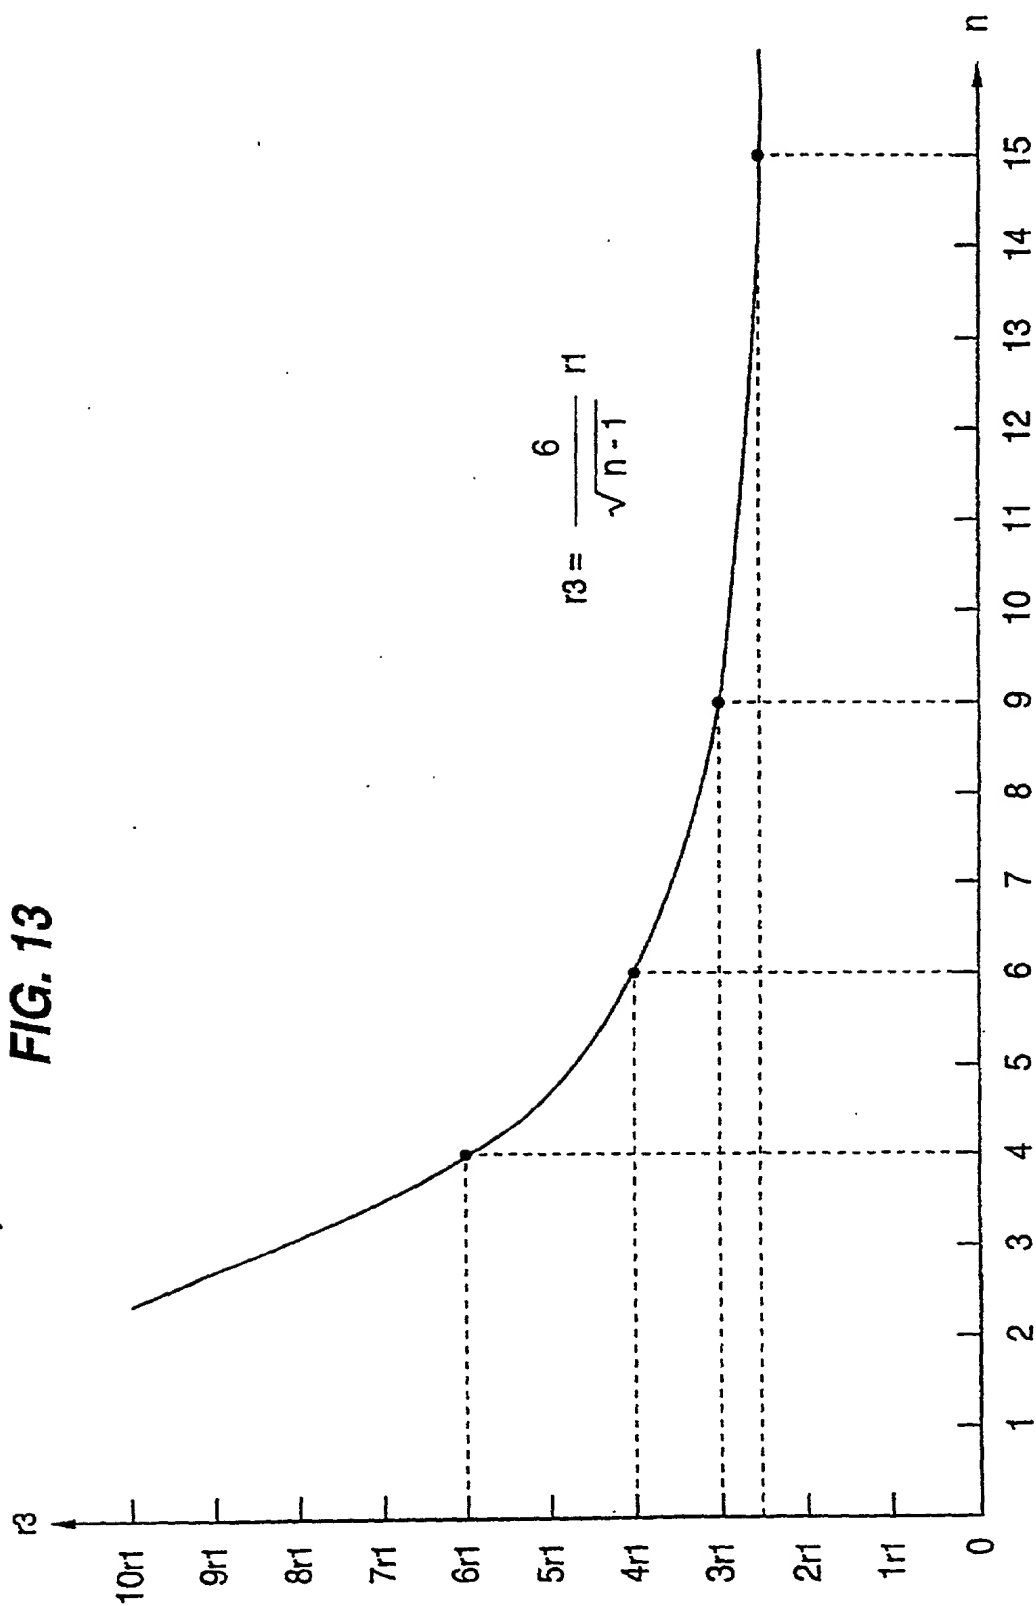


FIG. 14

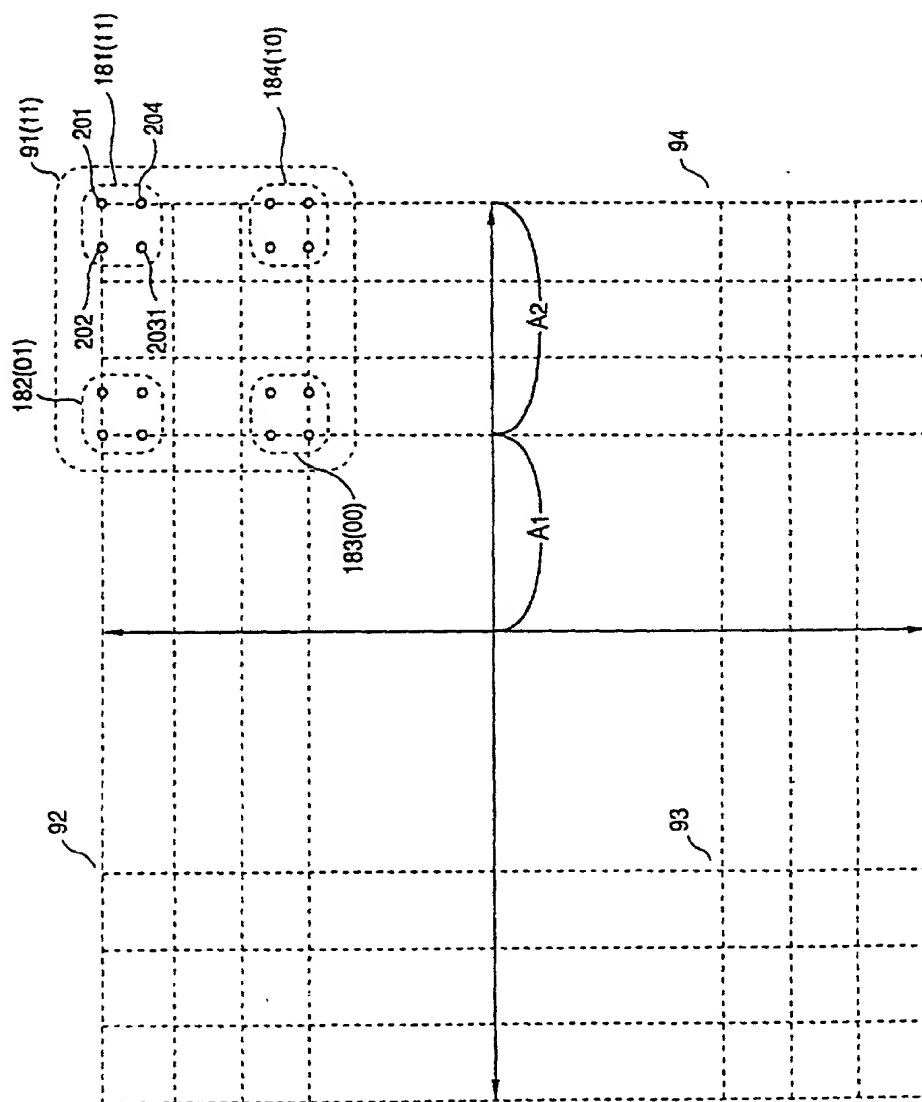


FIG. 15

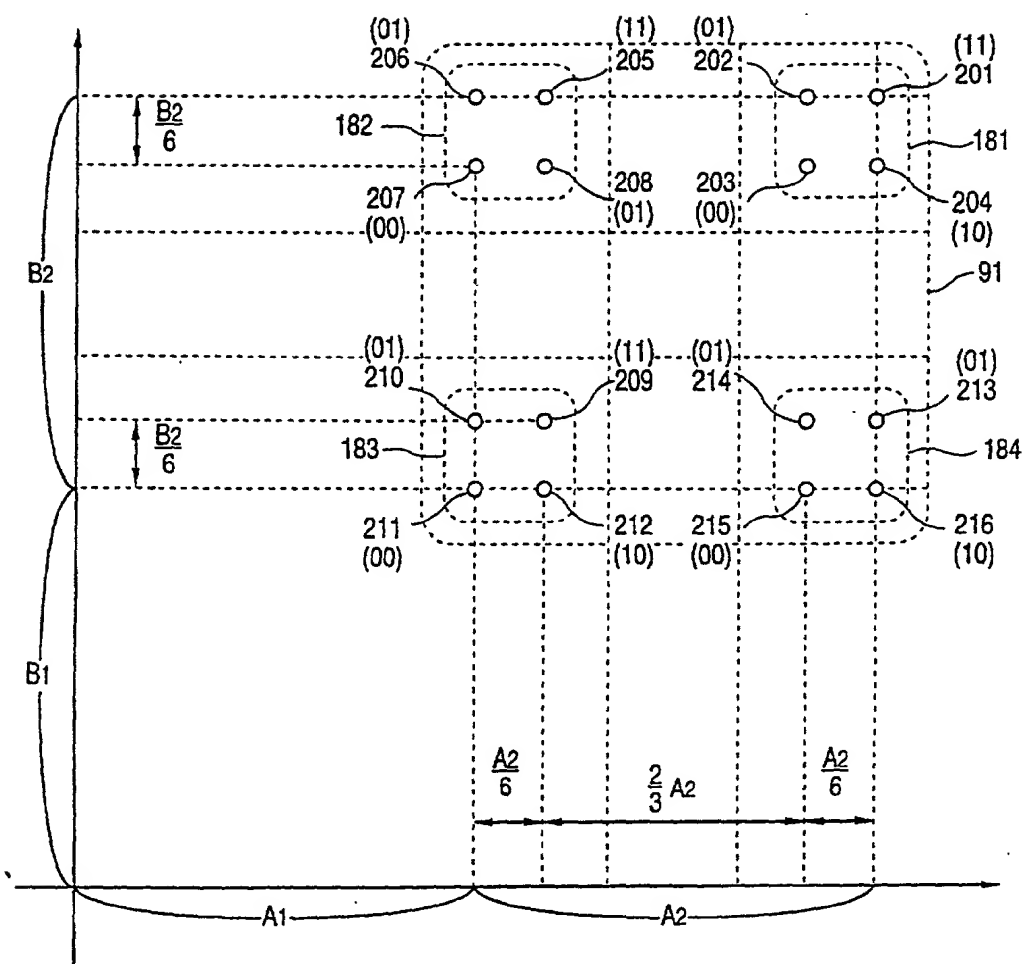


FIG. 16

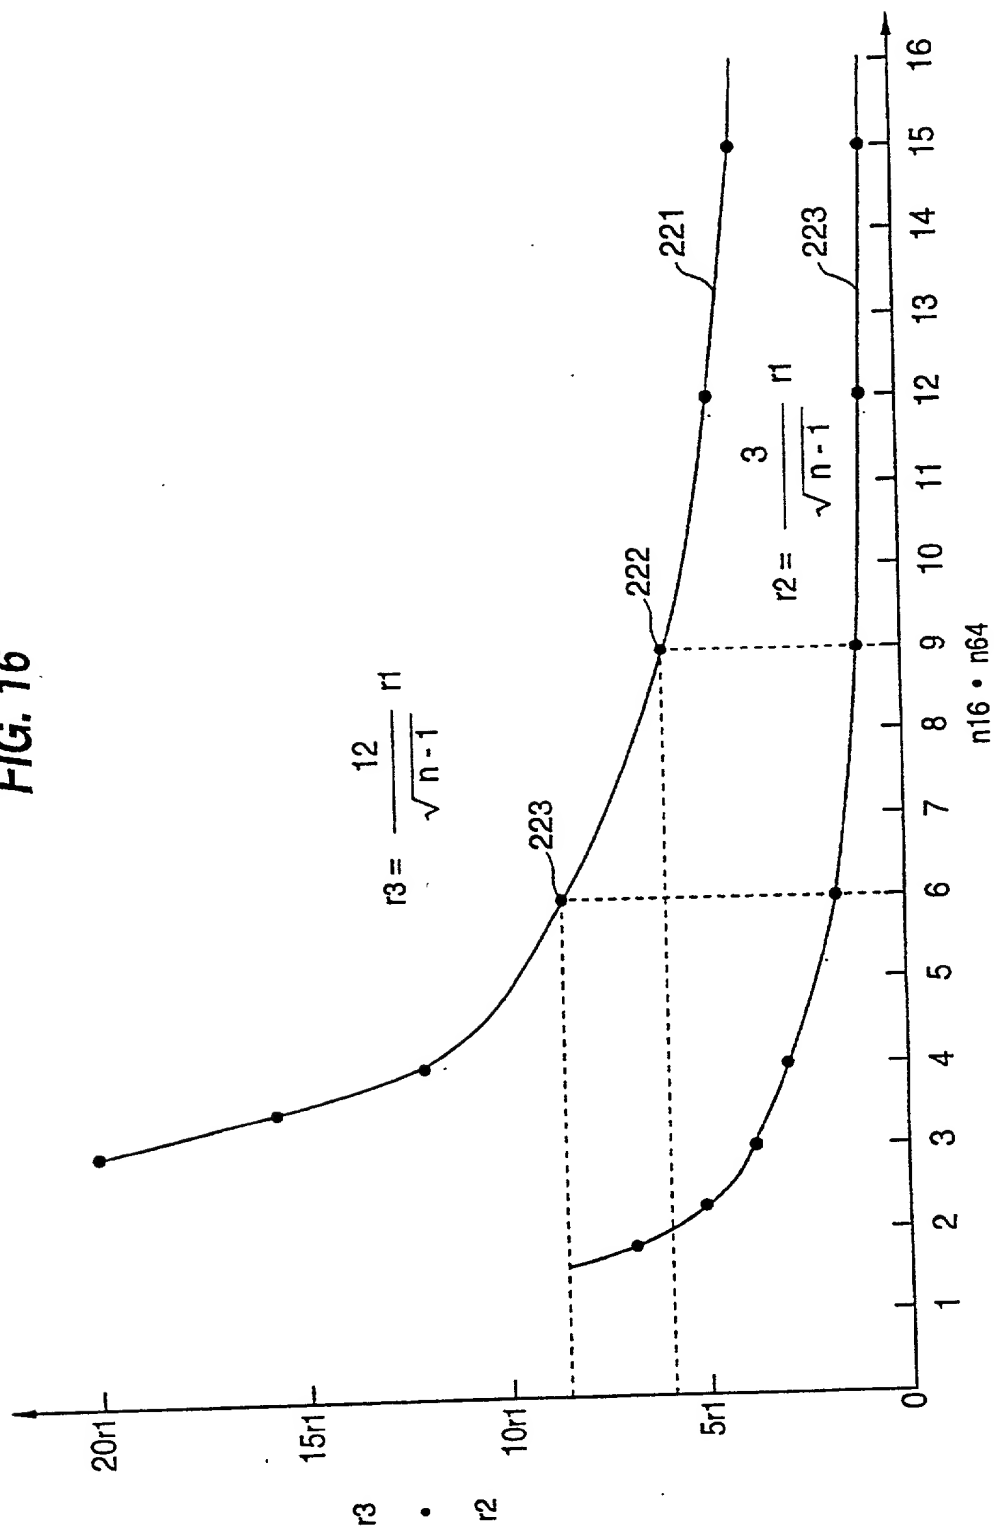


FIG. 17


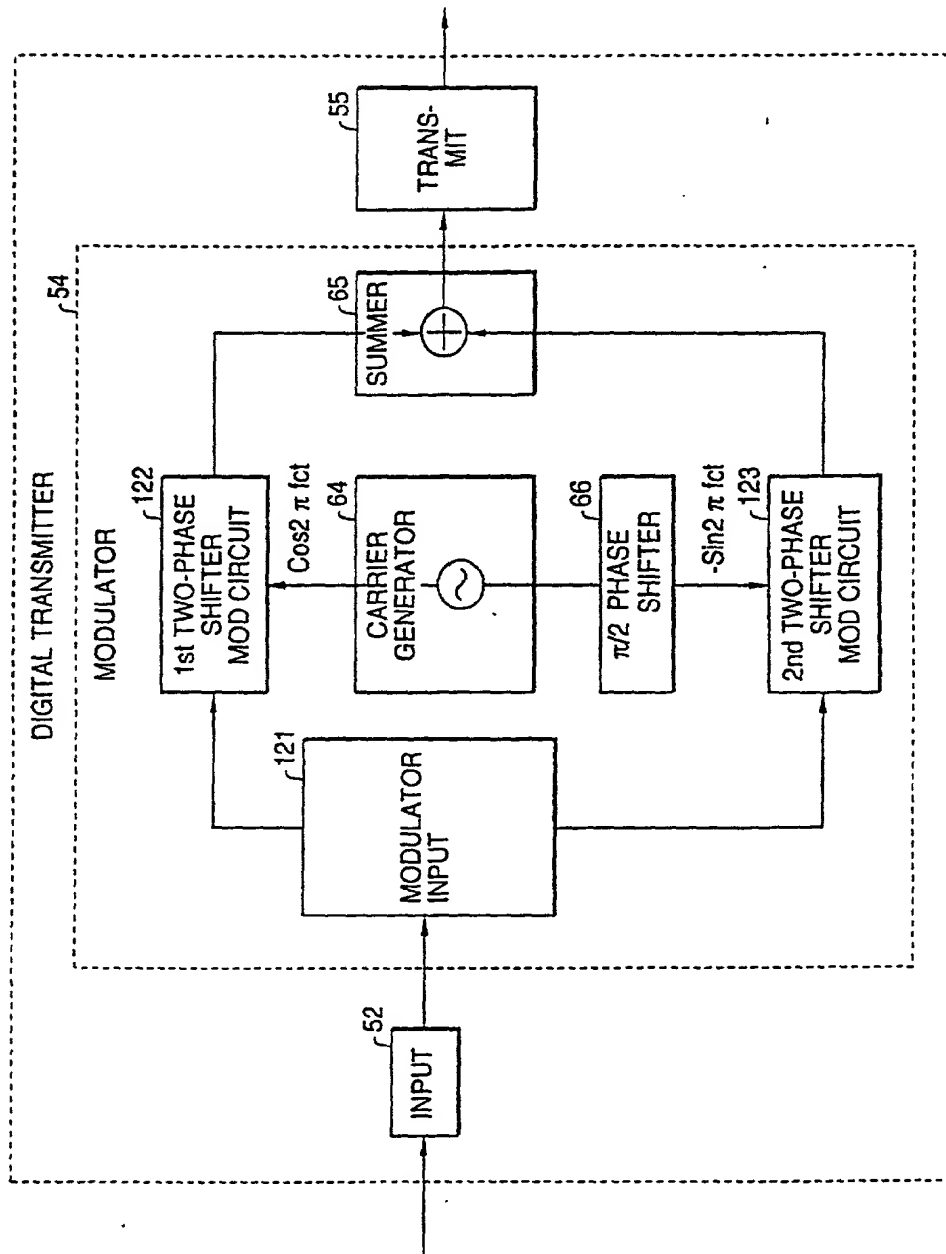


FIG. 18

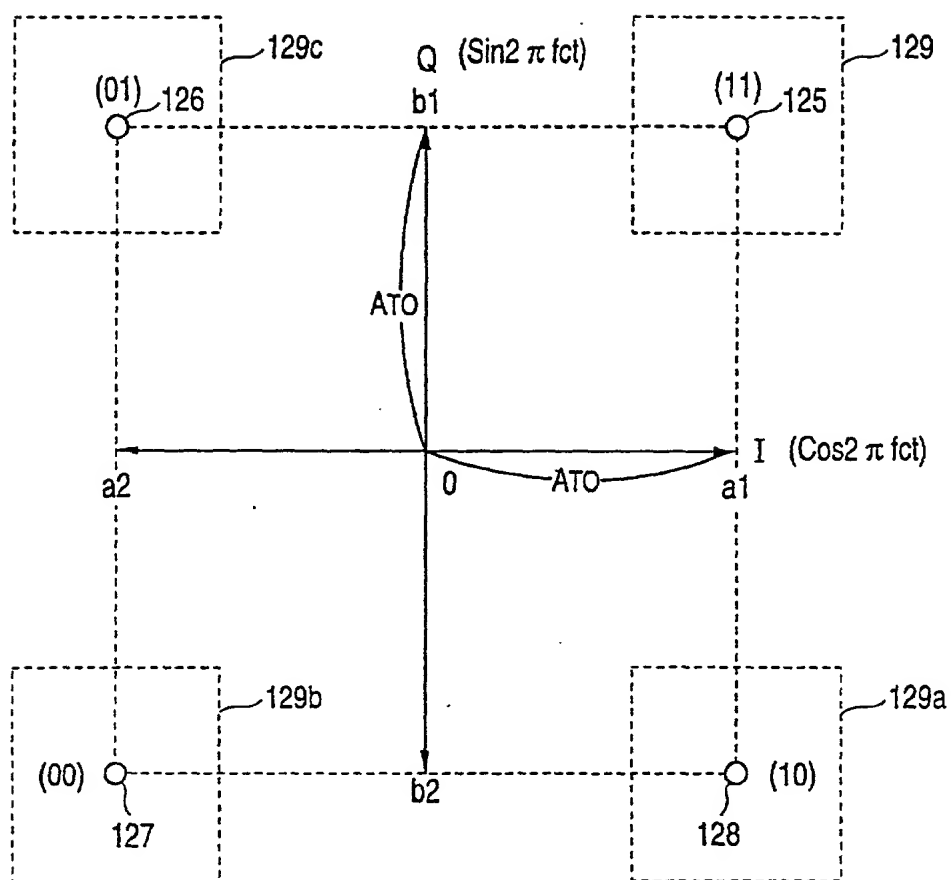

006260" 94627960

FIG. 19

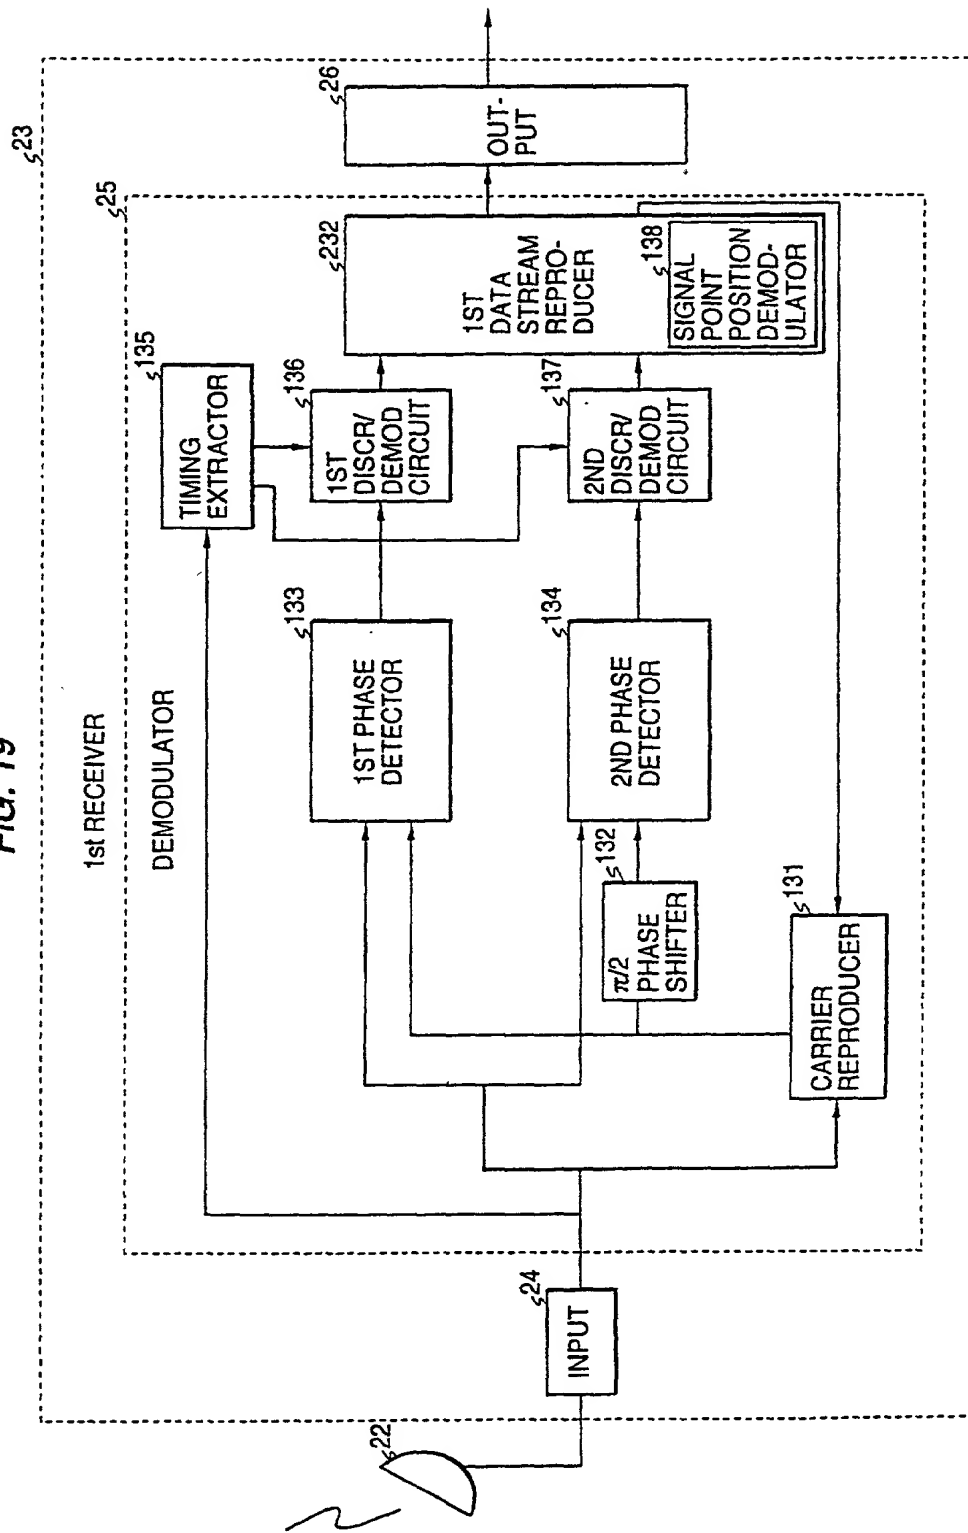


FIG. 20

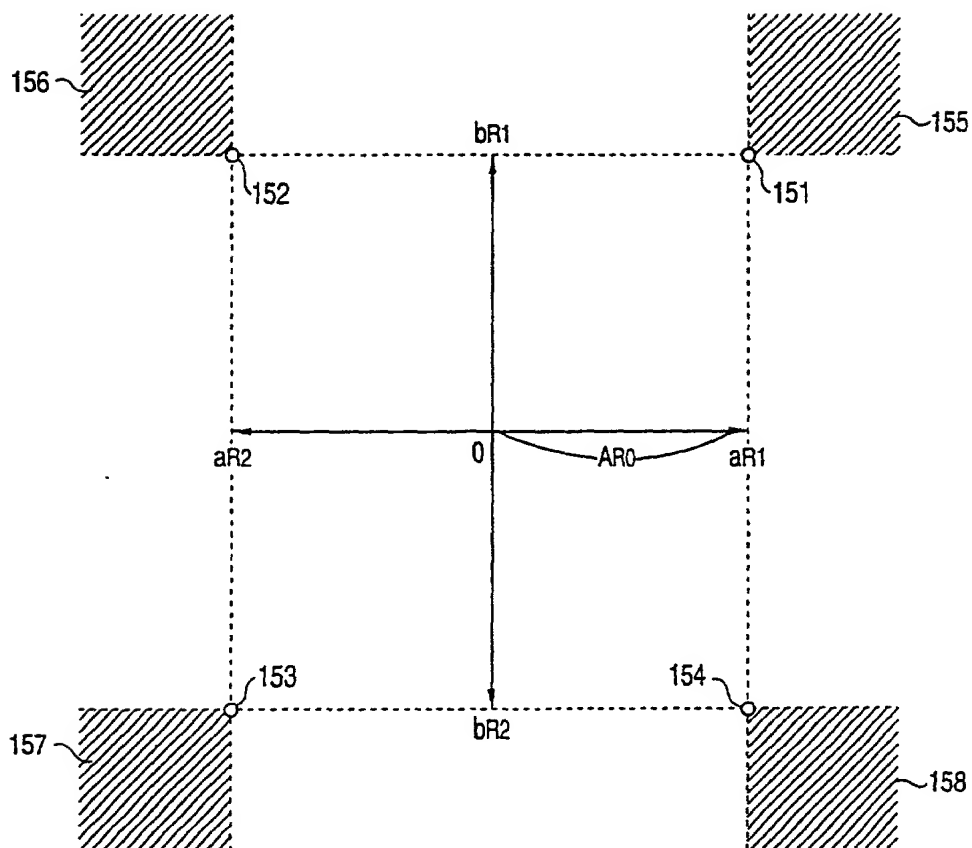


FIG. 21


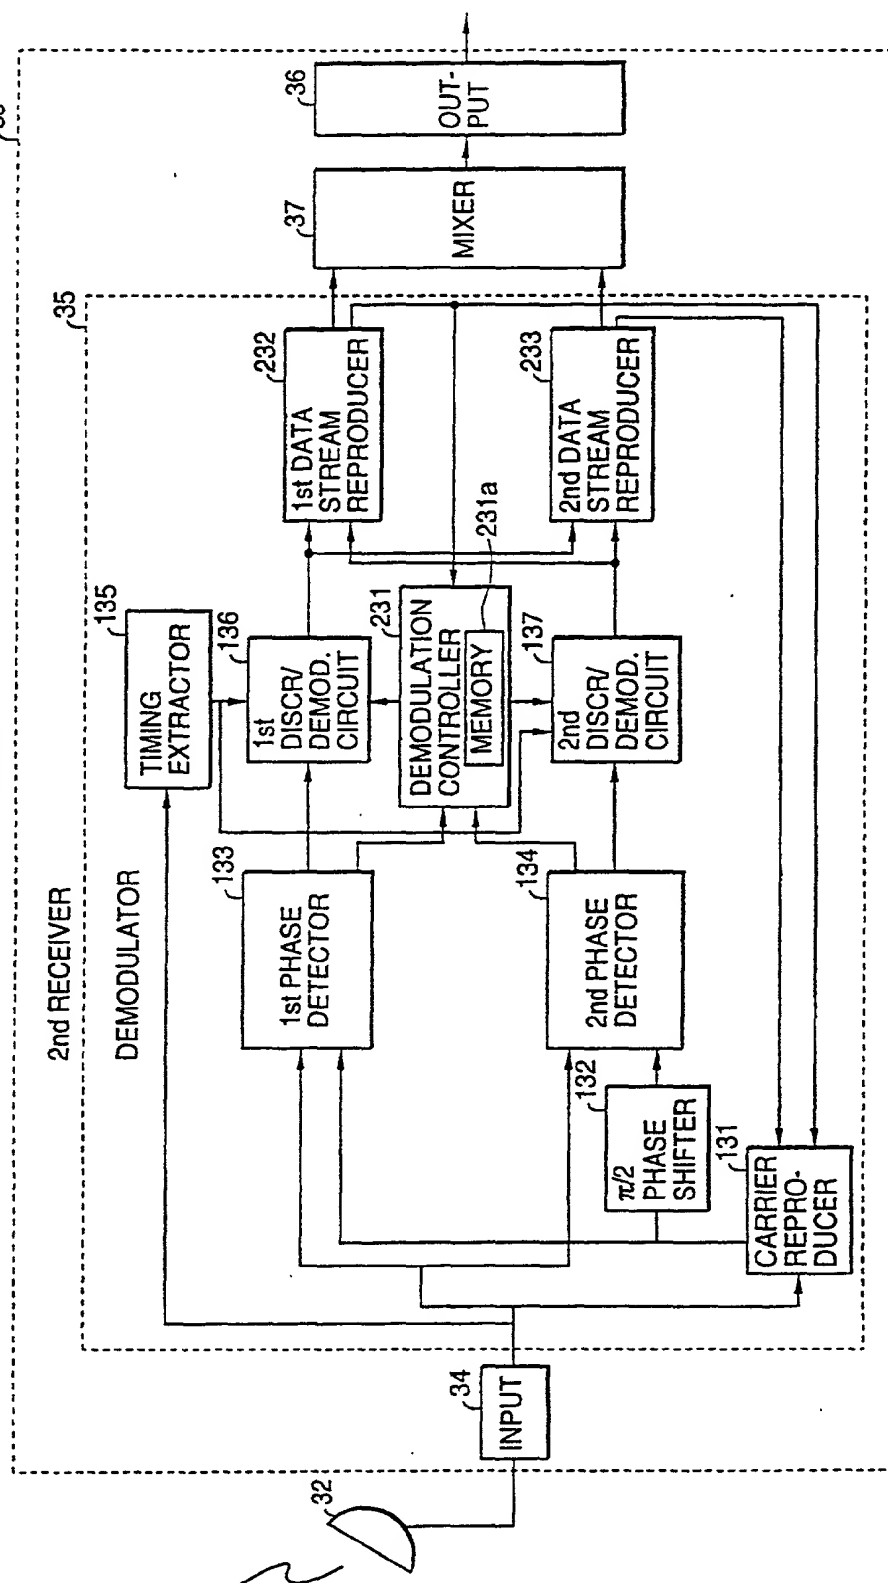


FIG. 22

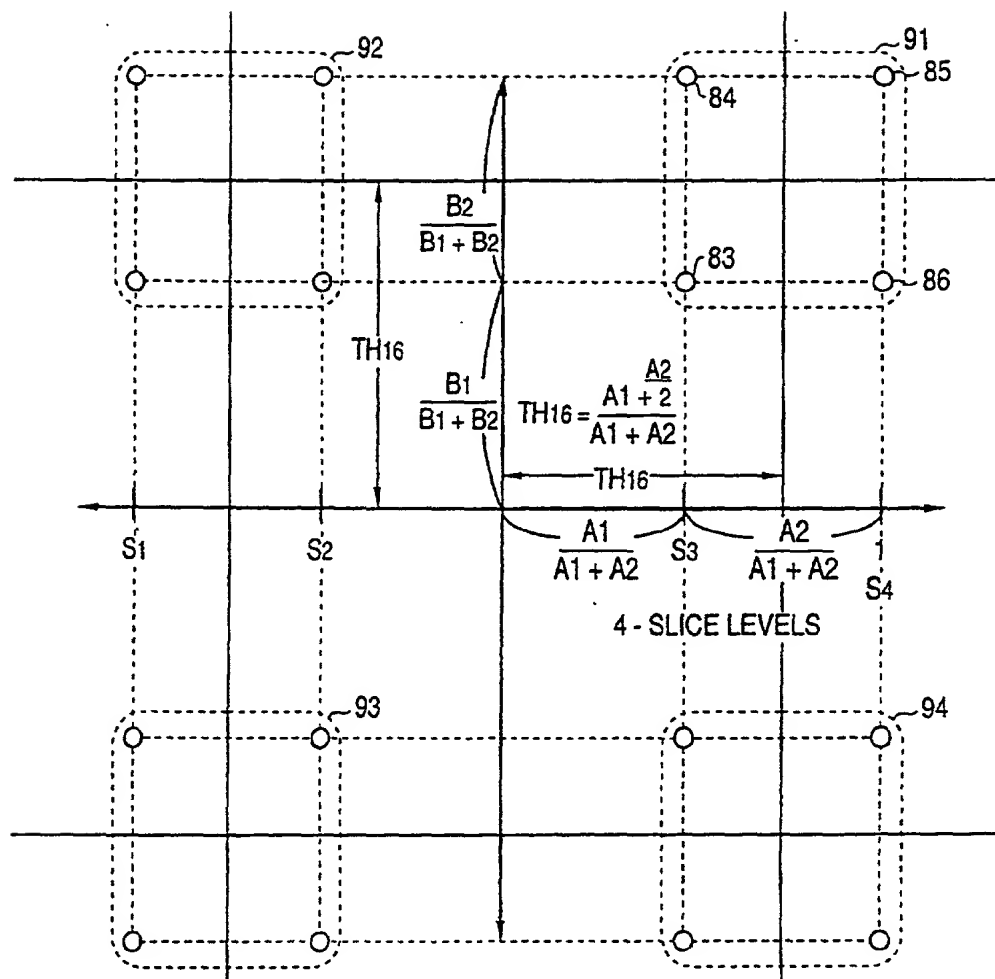

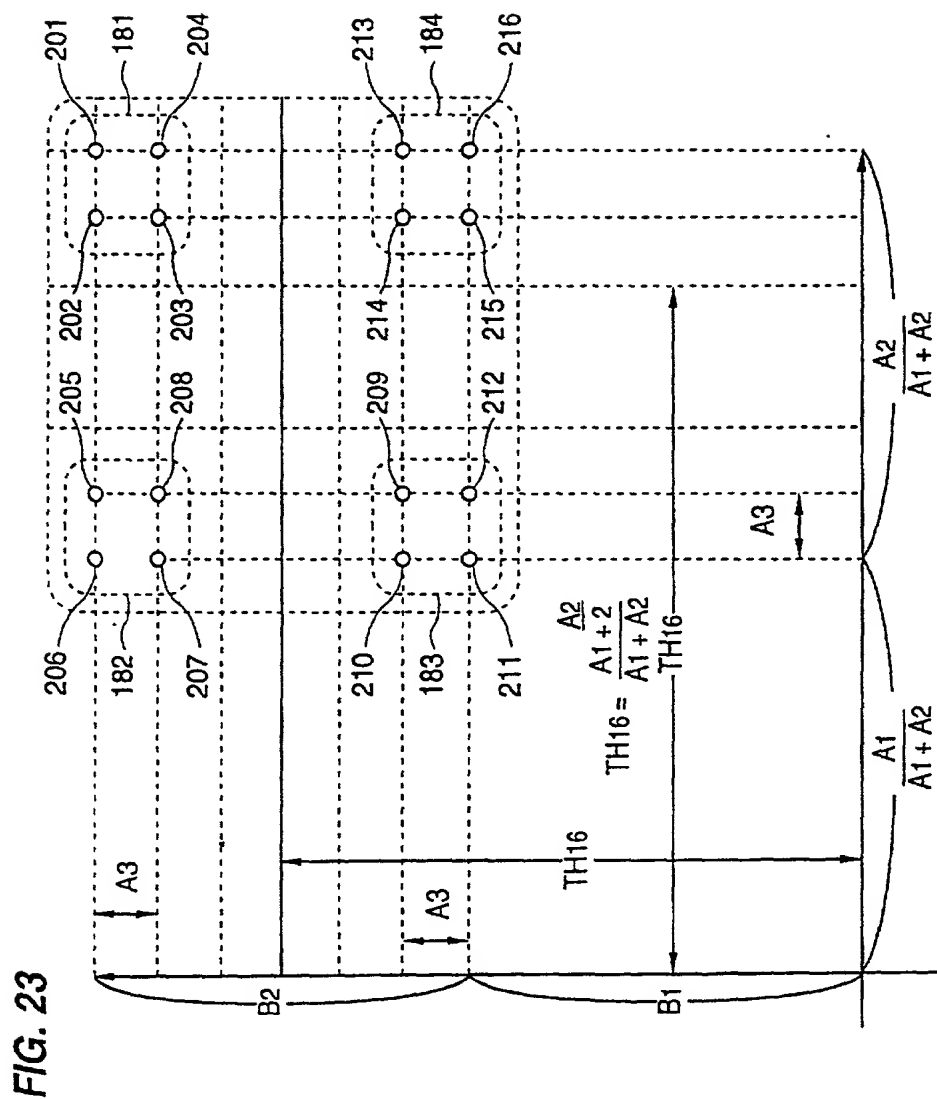


FIG. 24

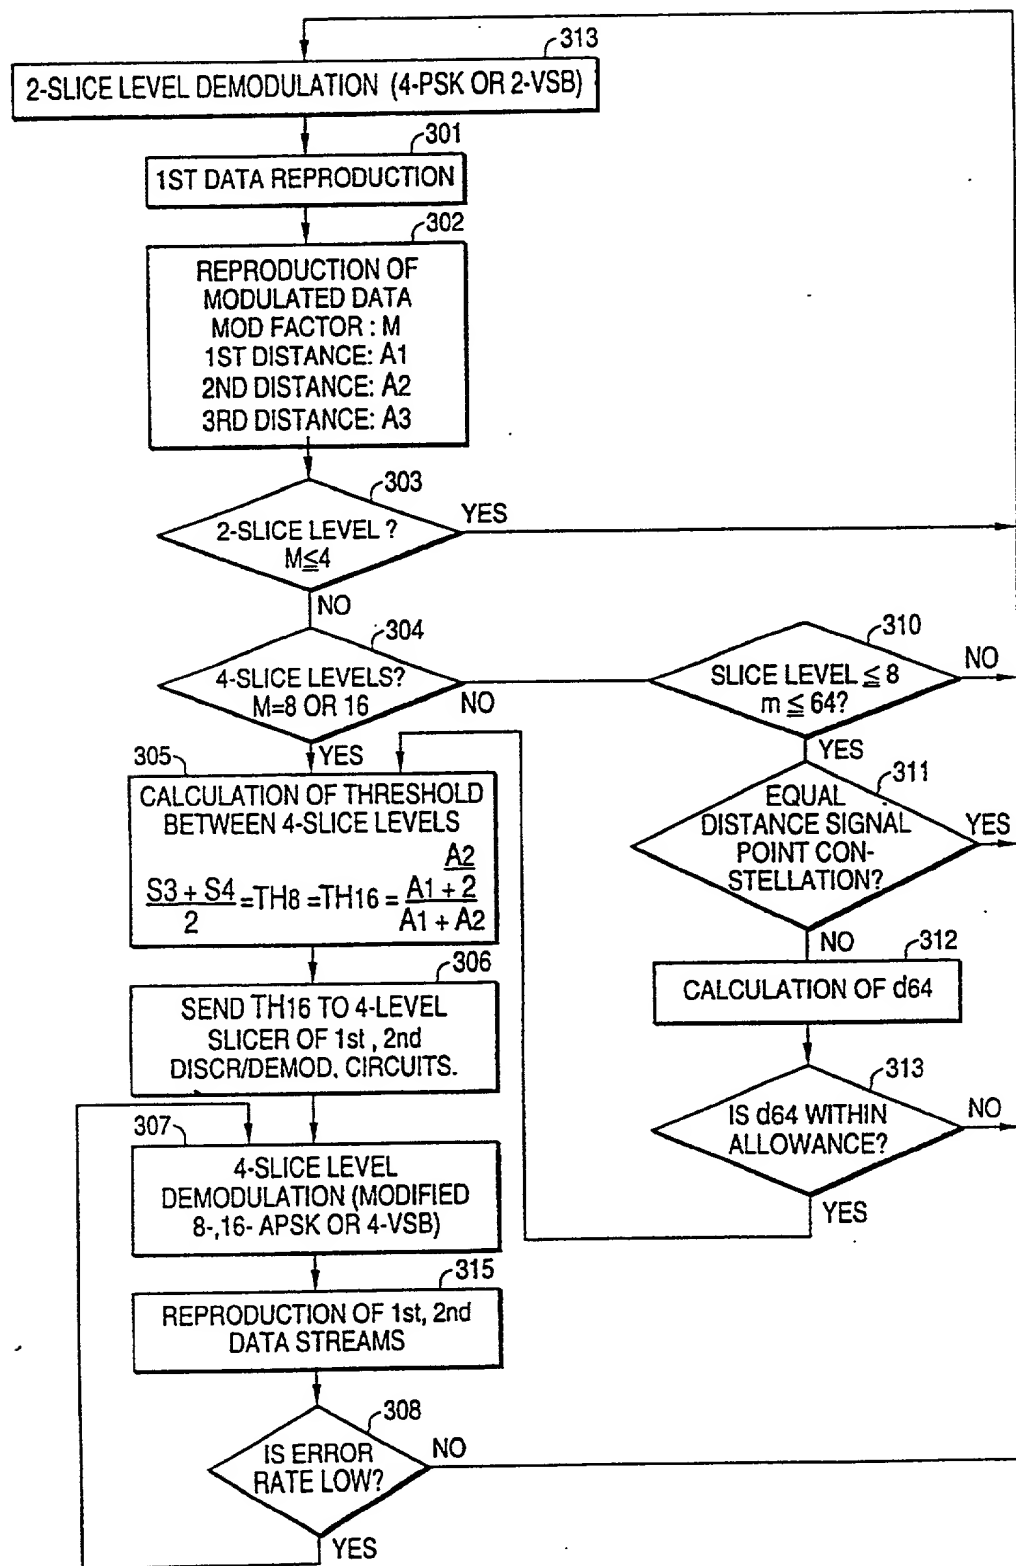


FIG. 25(a)



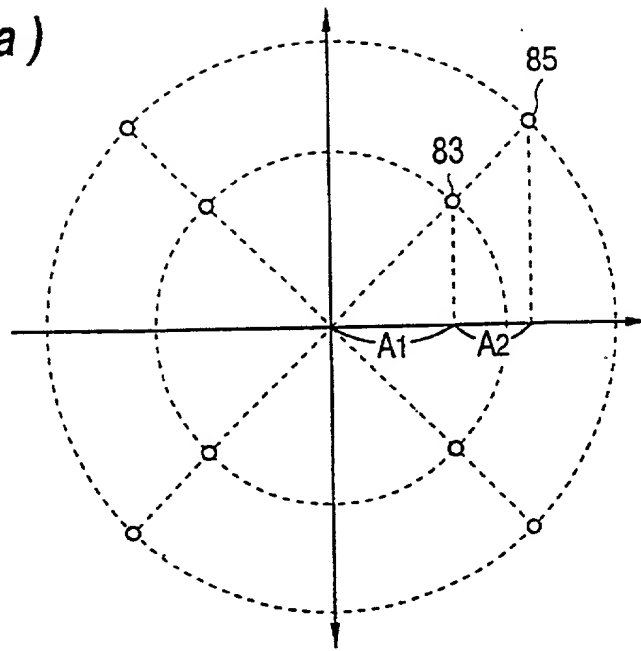


FIG. 25(b)

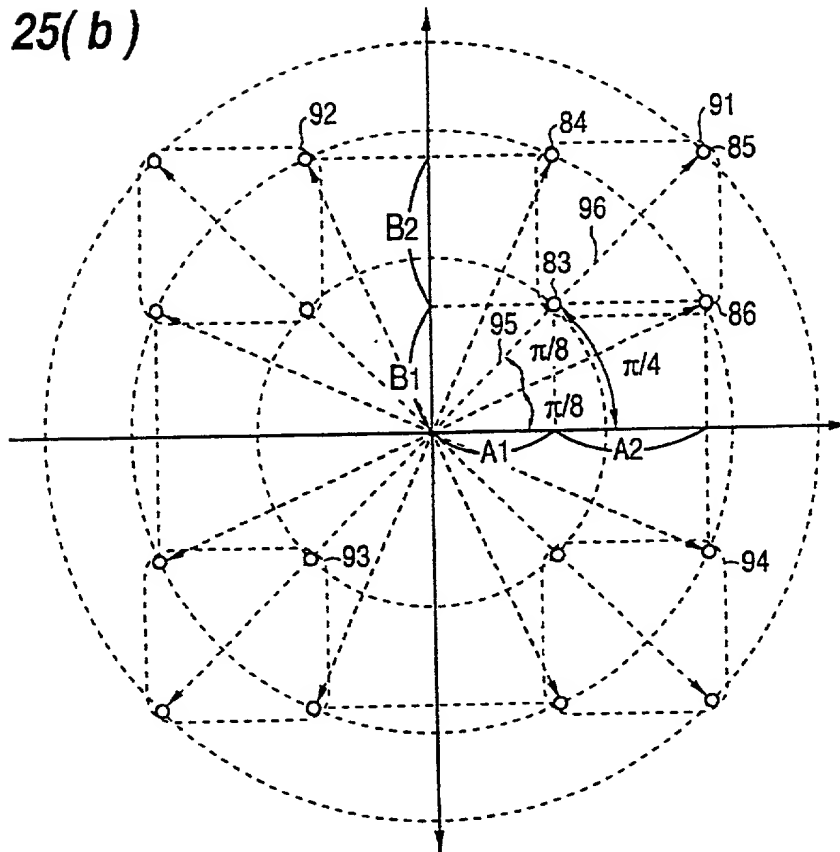

006260" 9462/960

FIG. 26

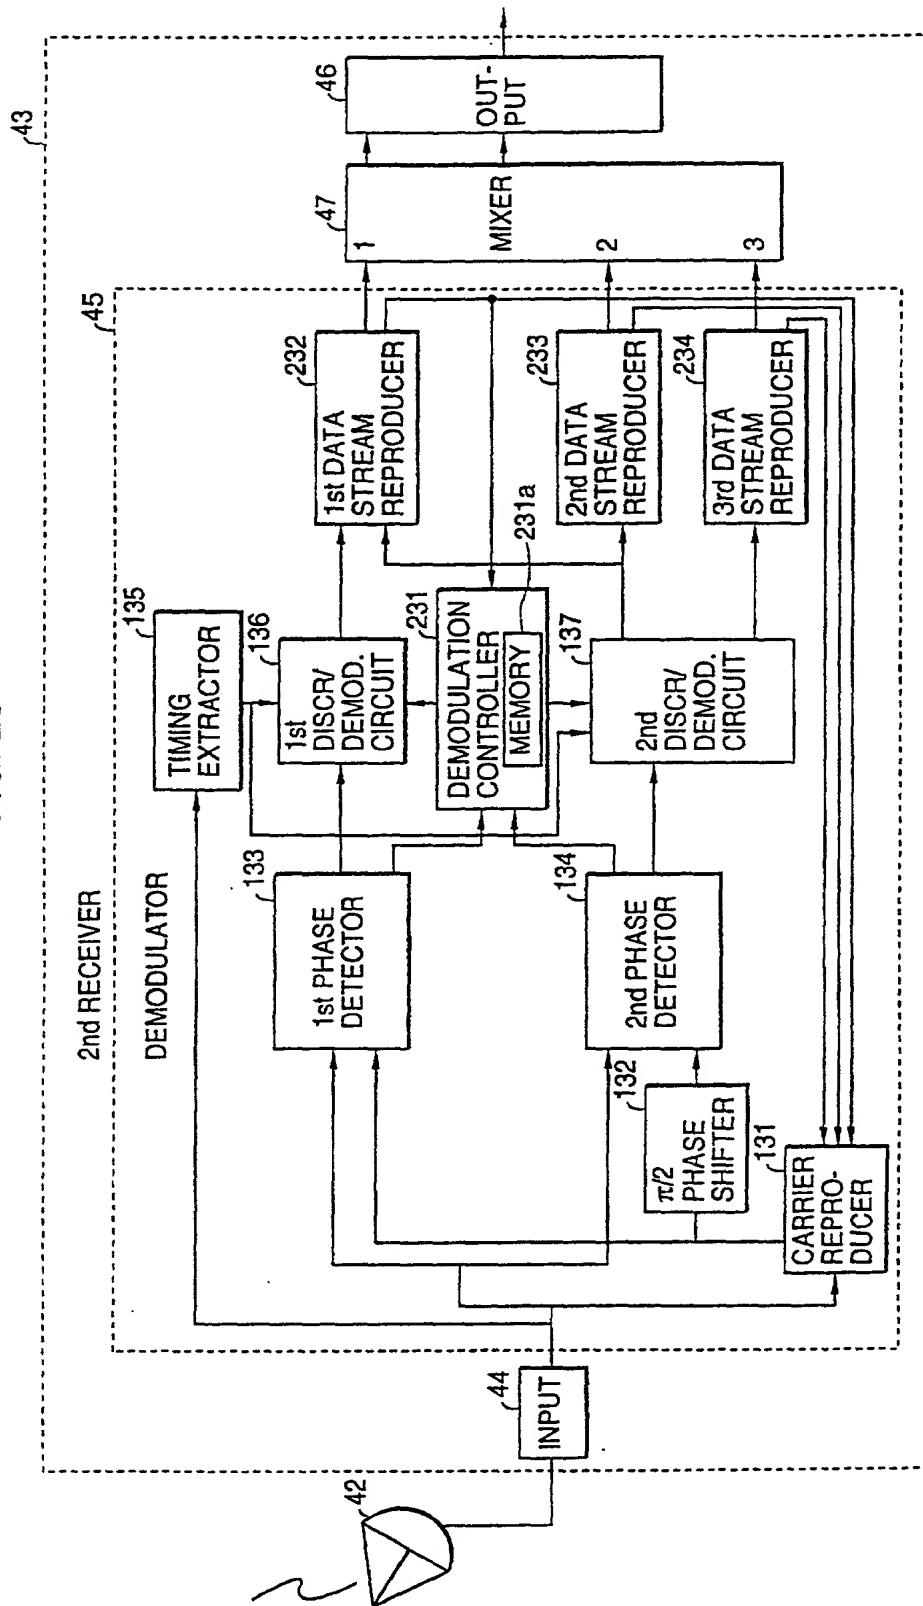

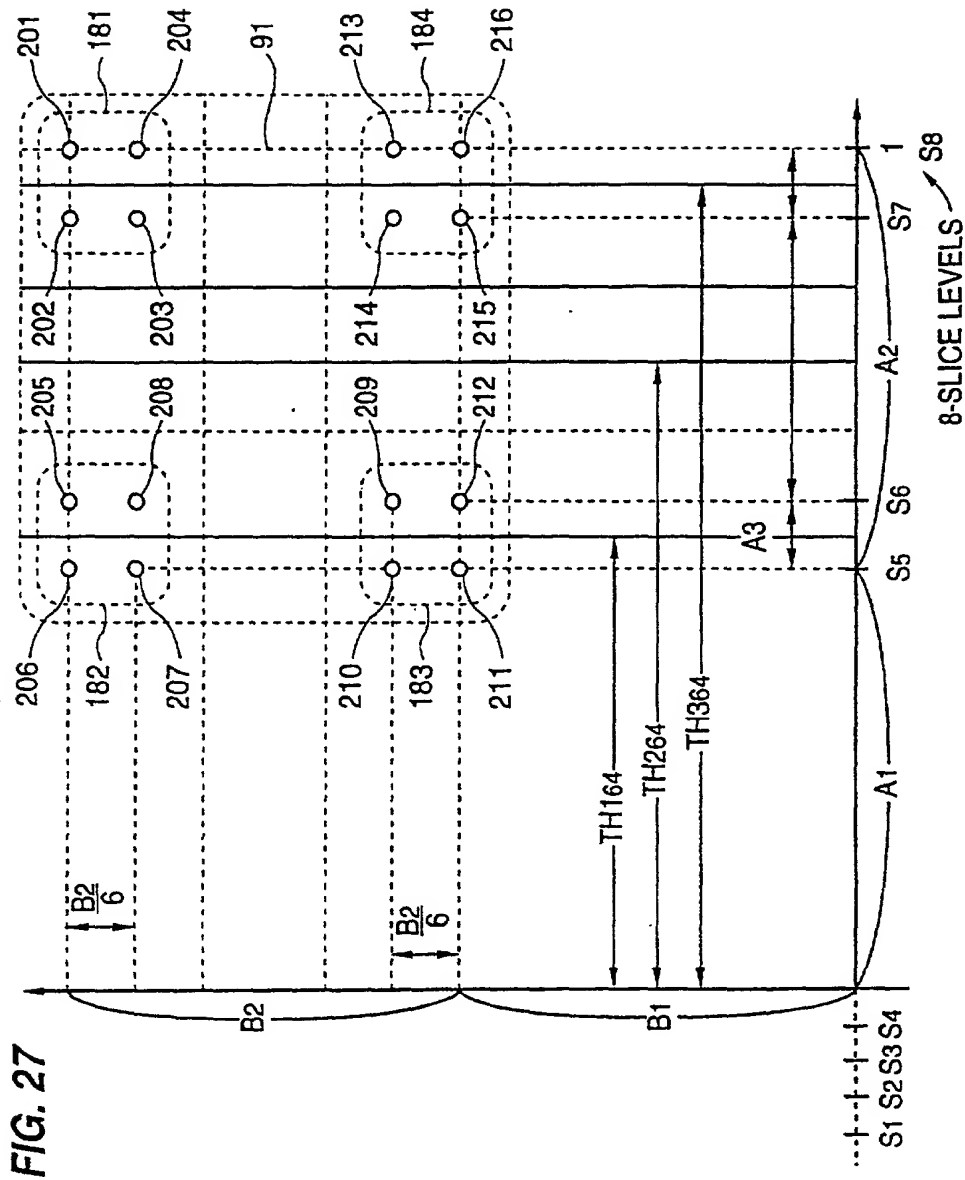


FIG. 28

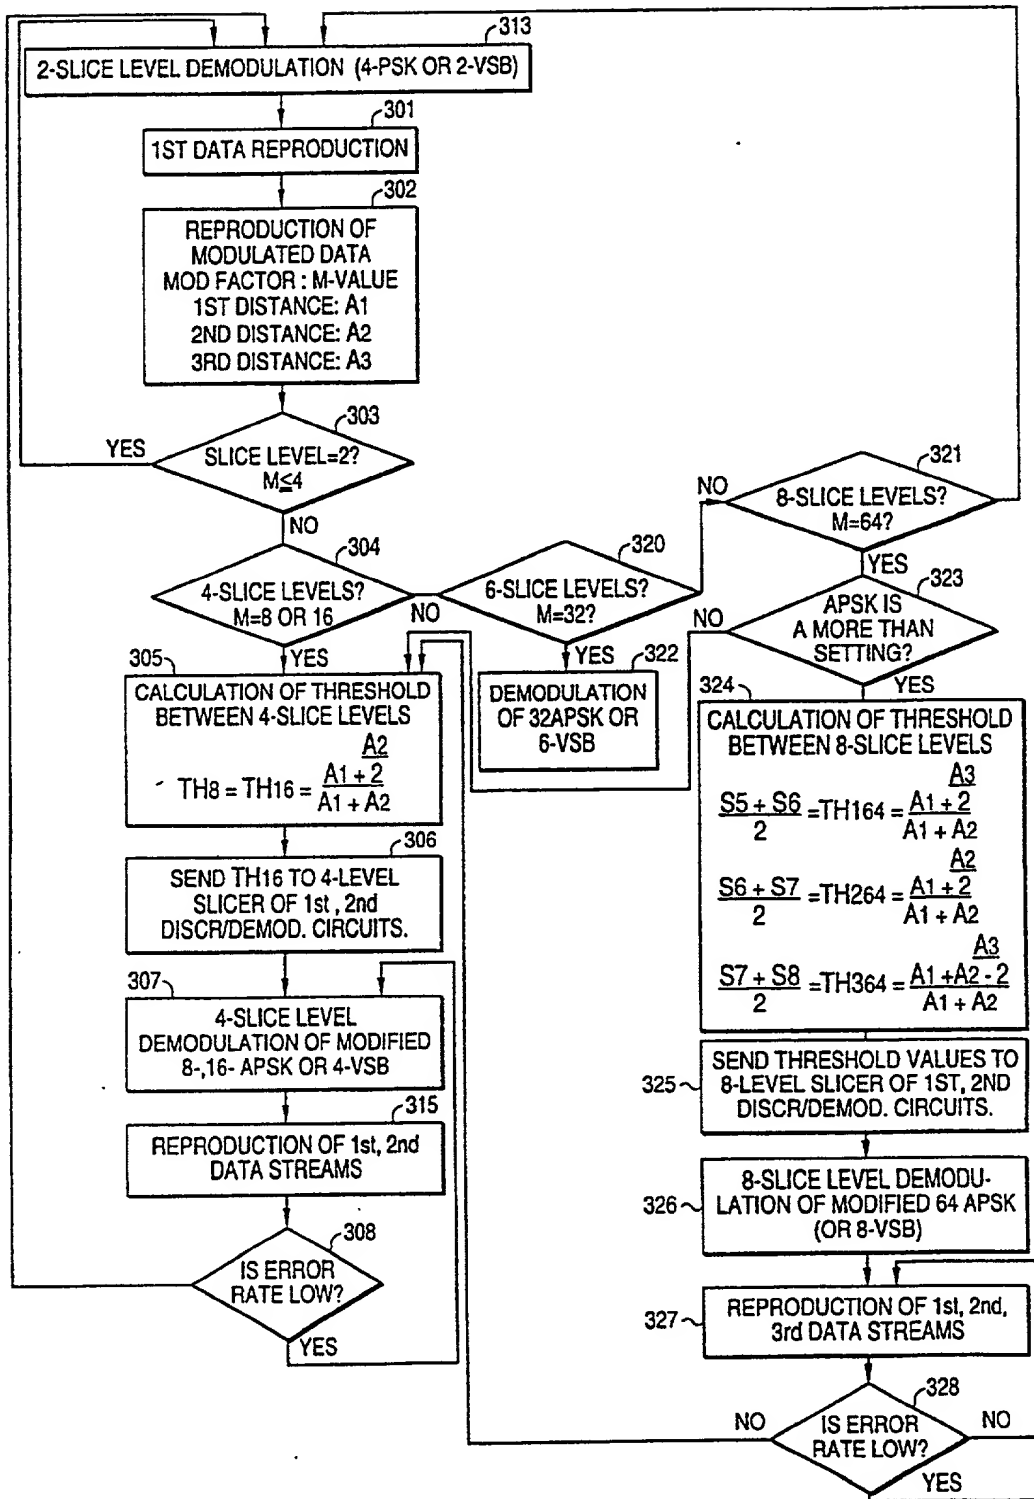


FIG. 29

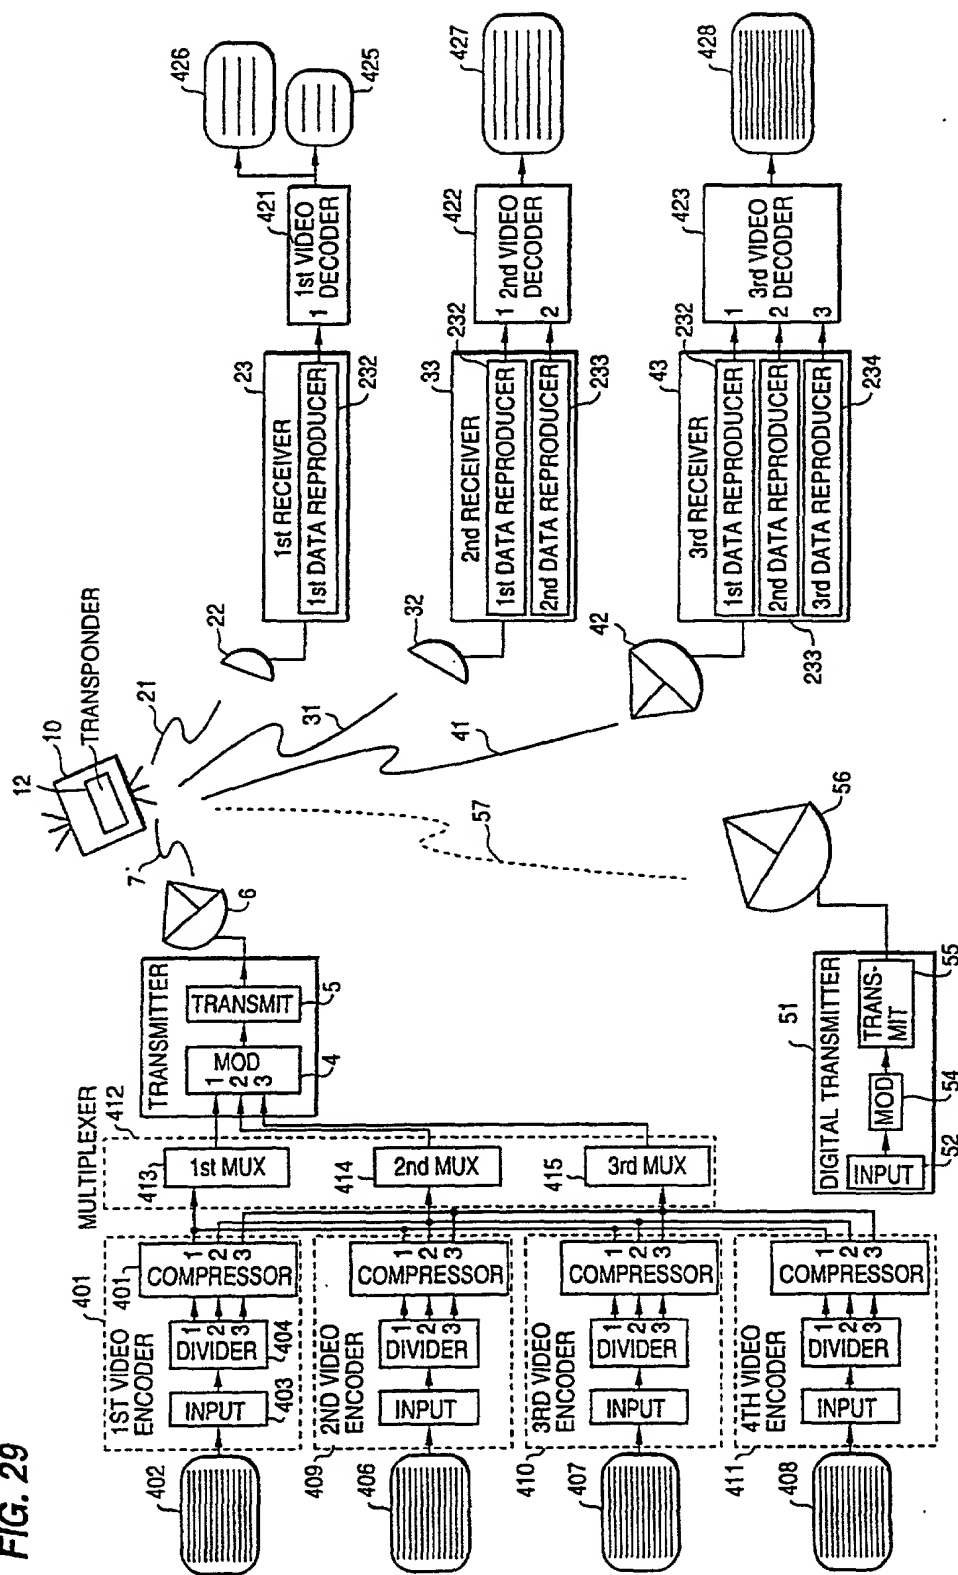


FIG. 30


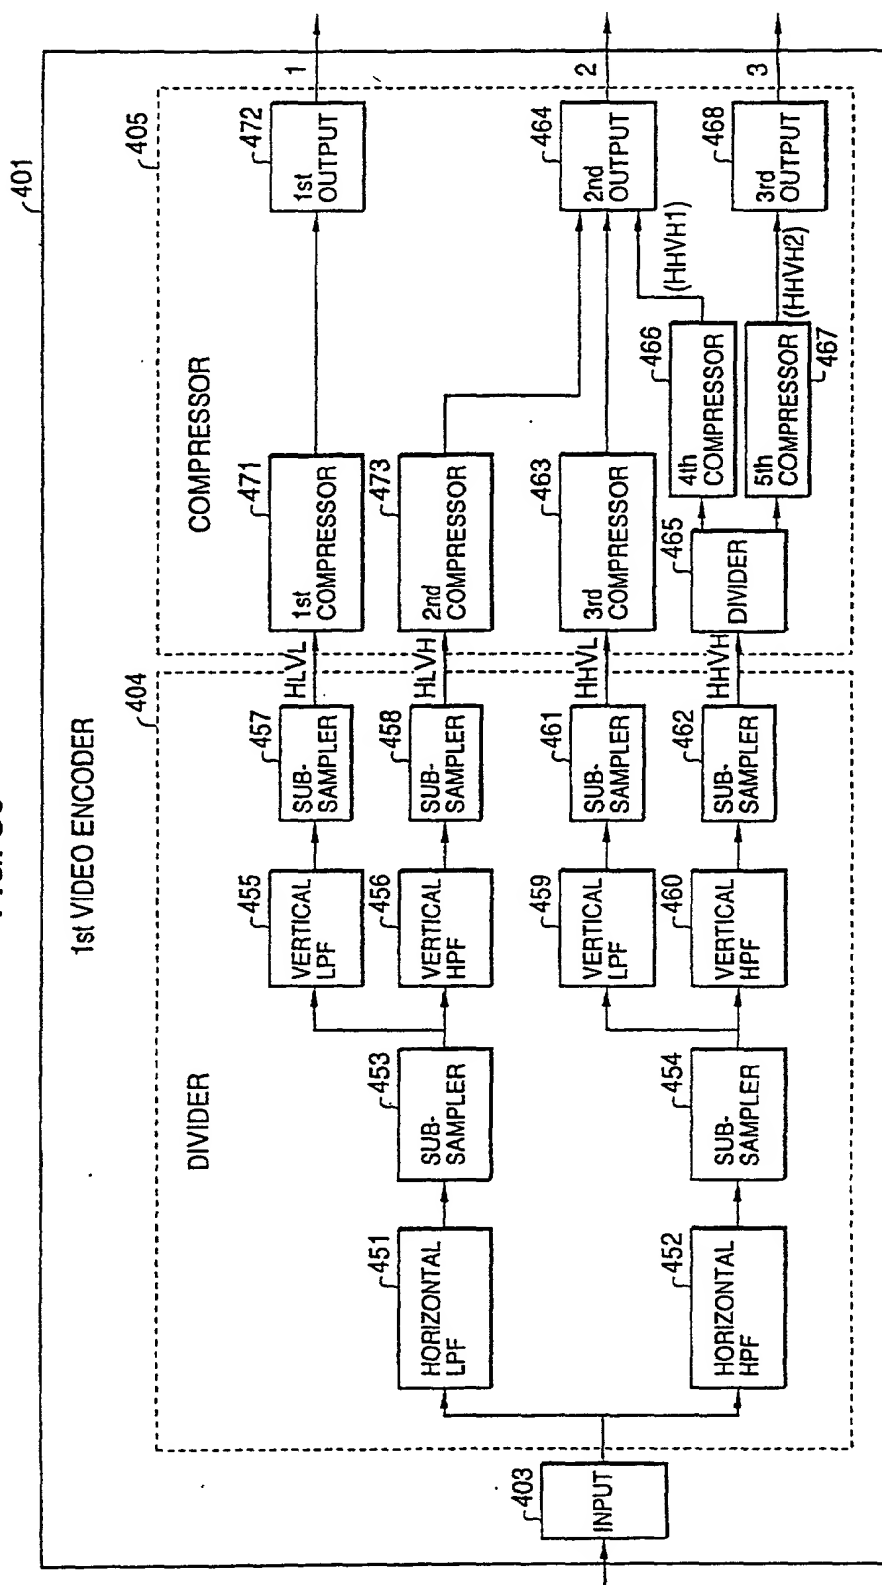


FIG. 31

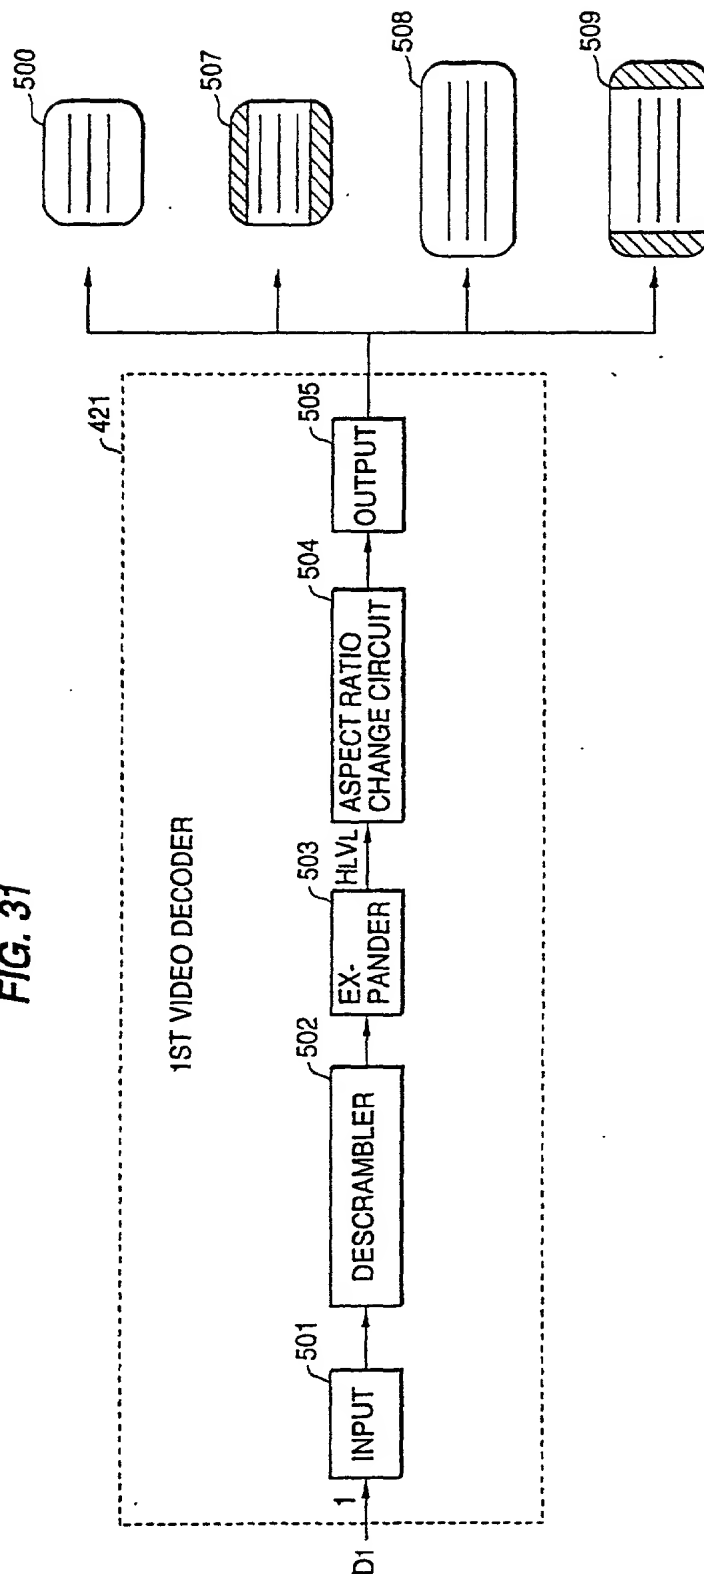

006260" 94622960

FIG. 32

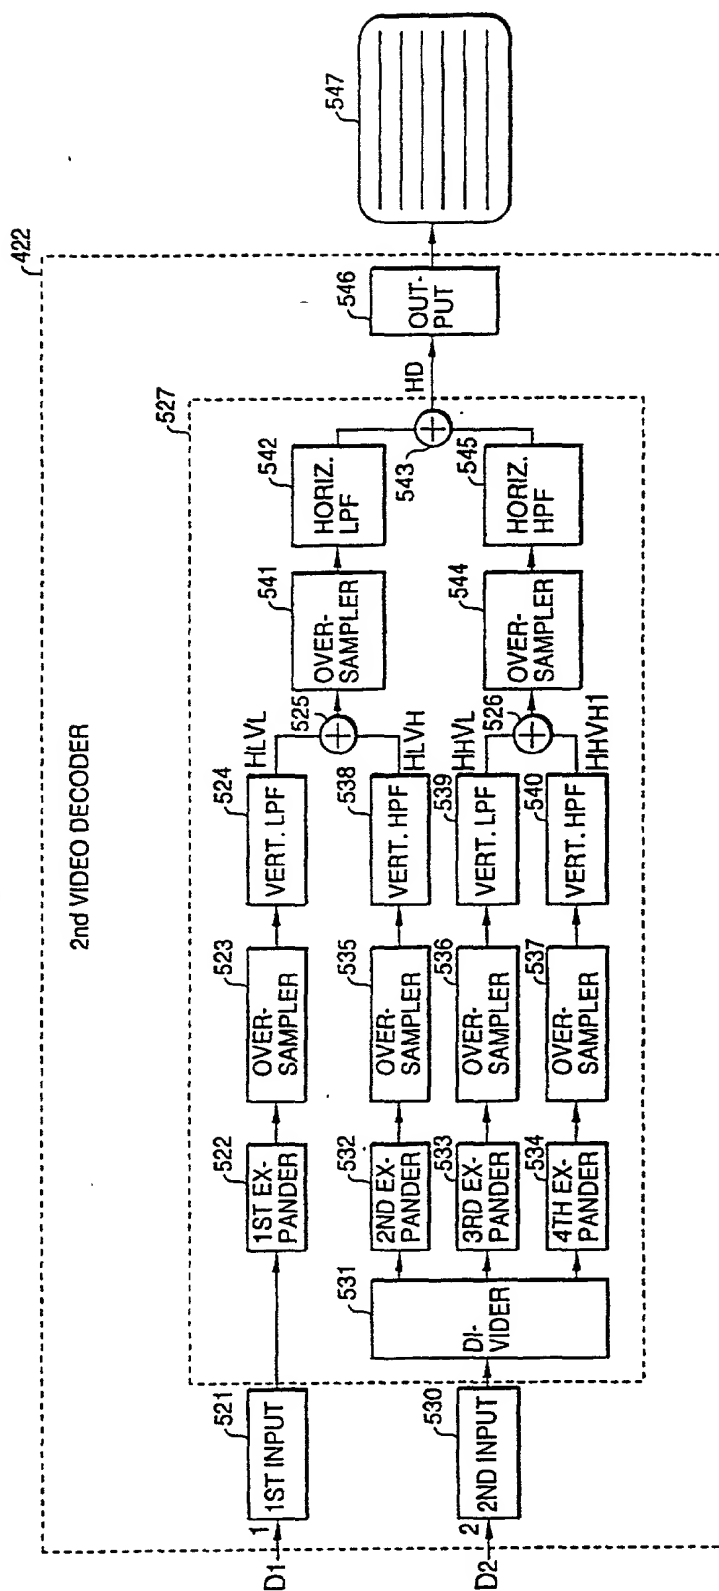


FIG. 33

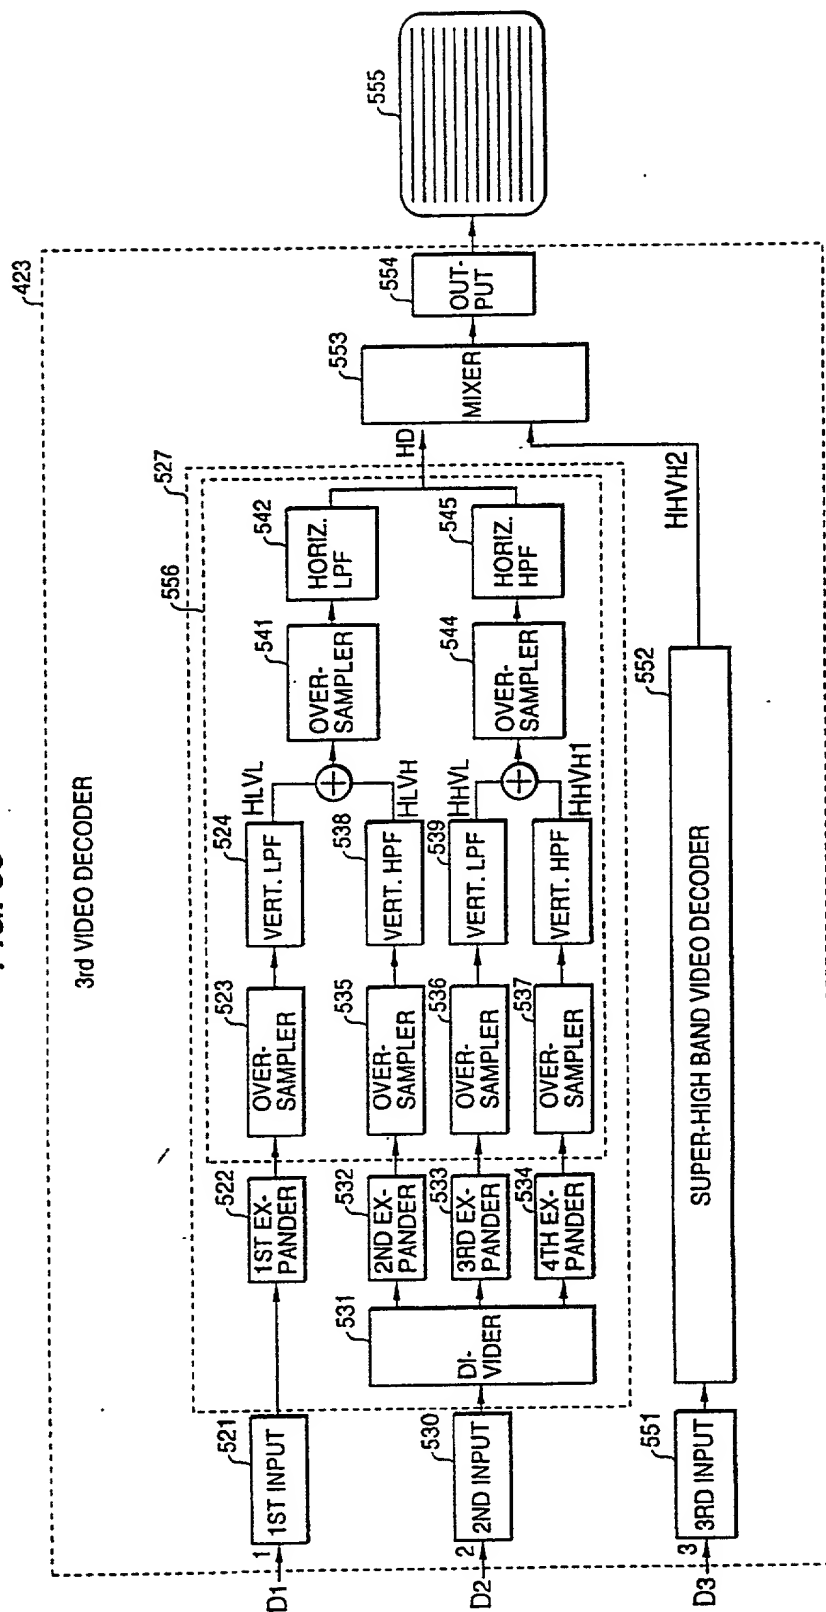


FIG. 34

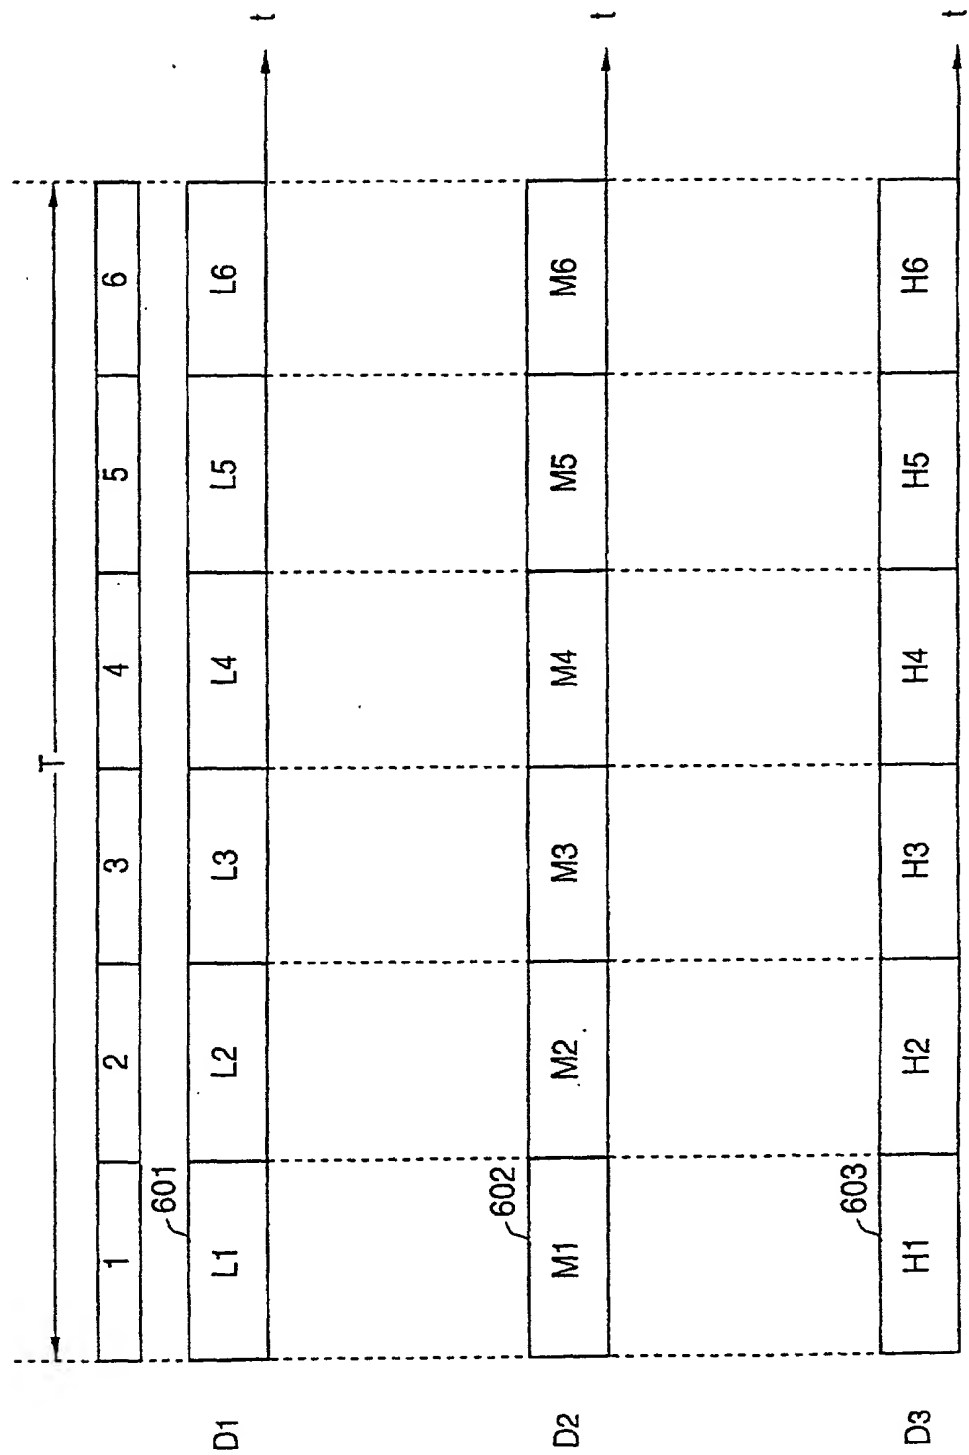


FIG. 35

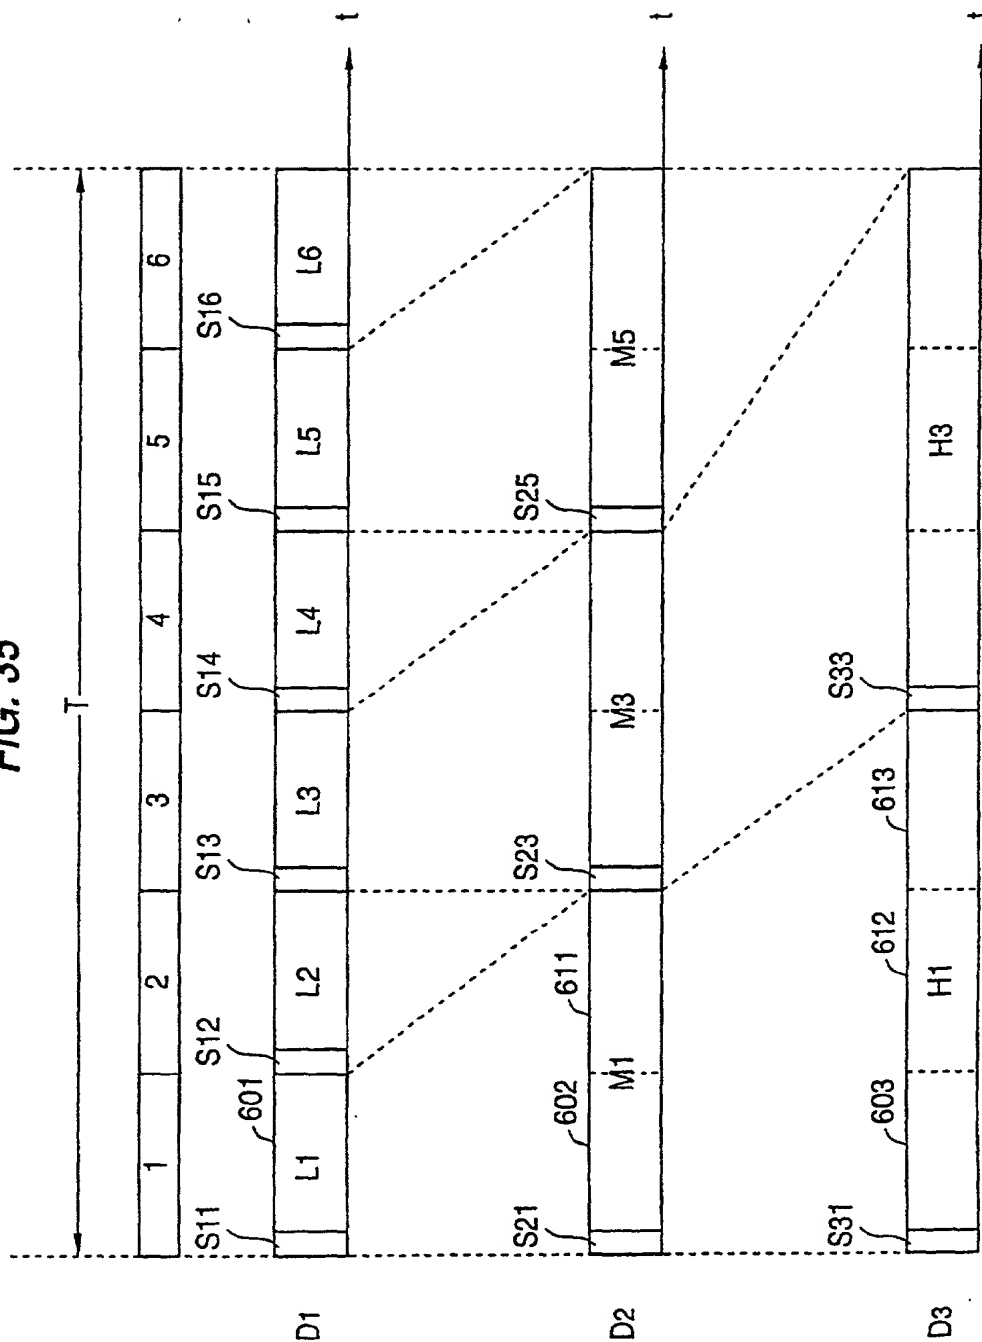


FIG. 36

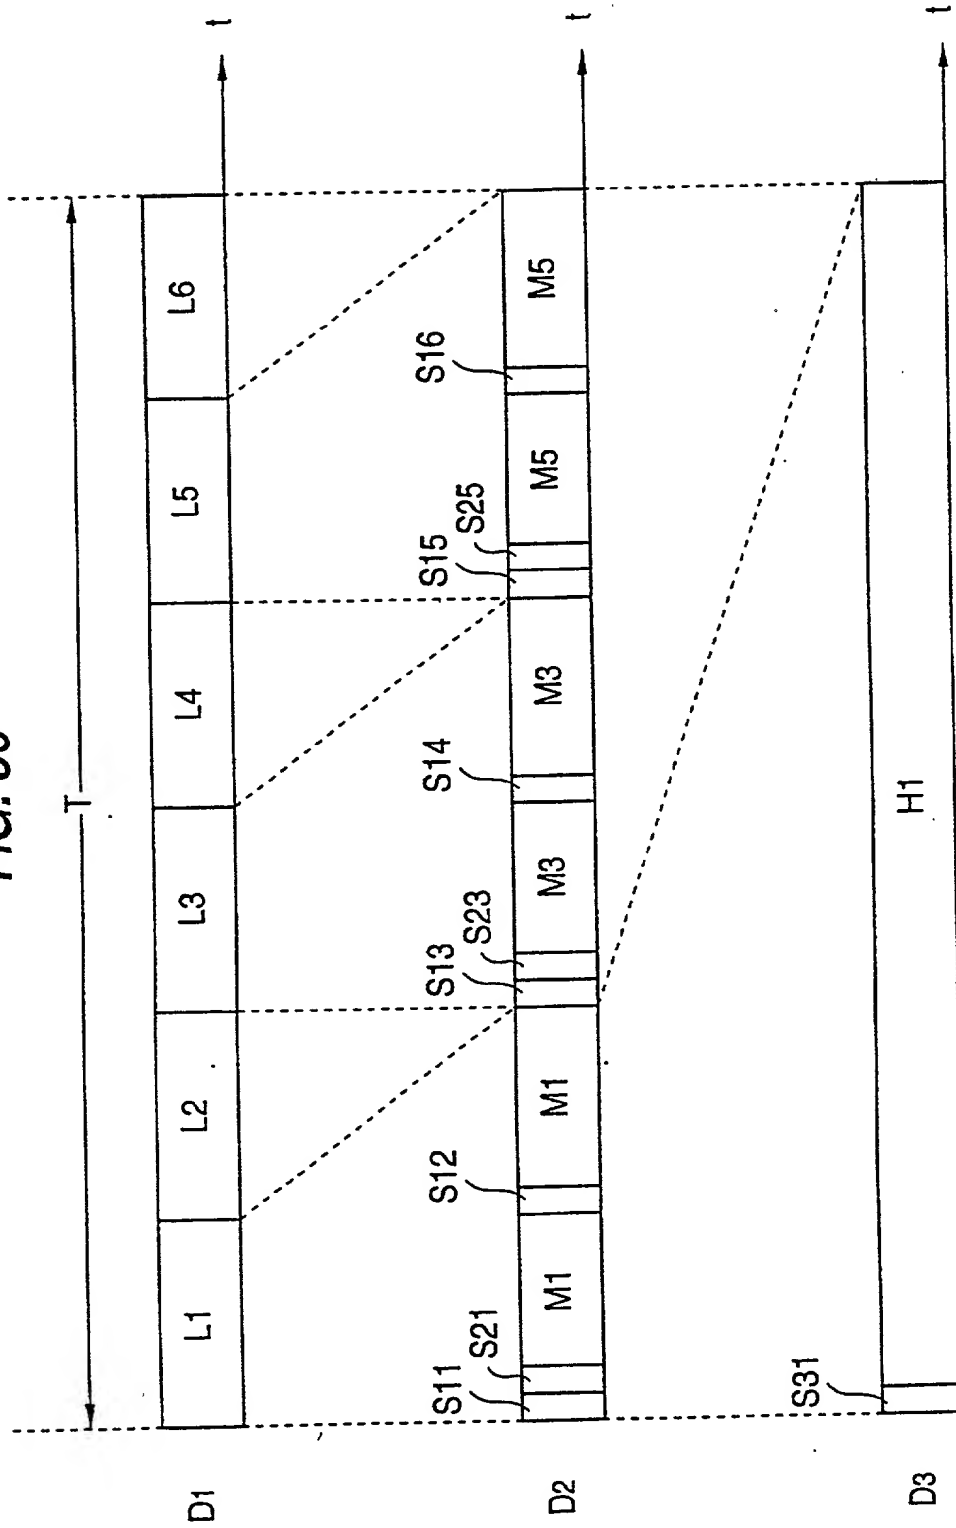


FIG. 37

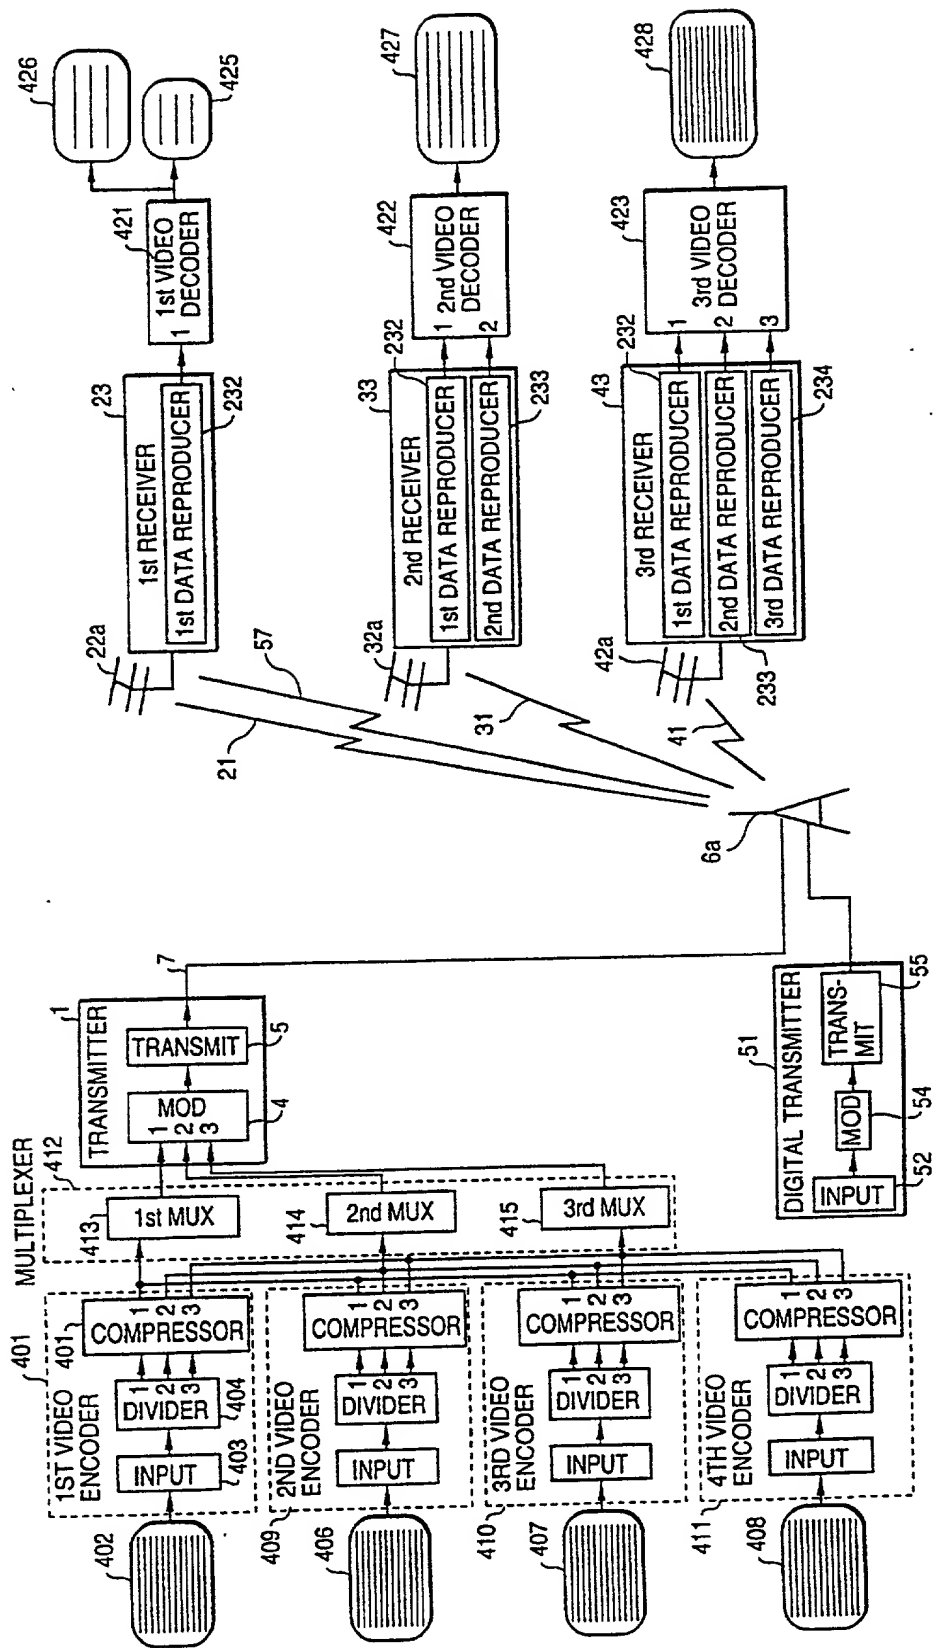


FIG. 39

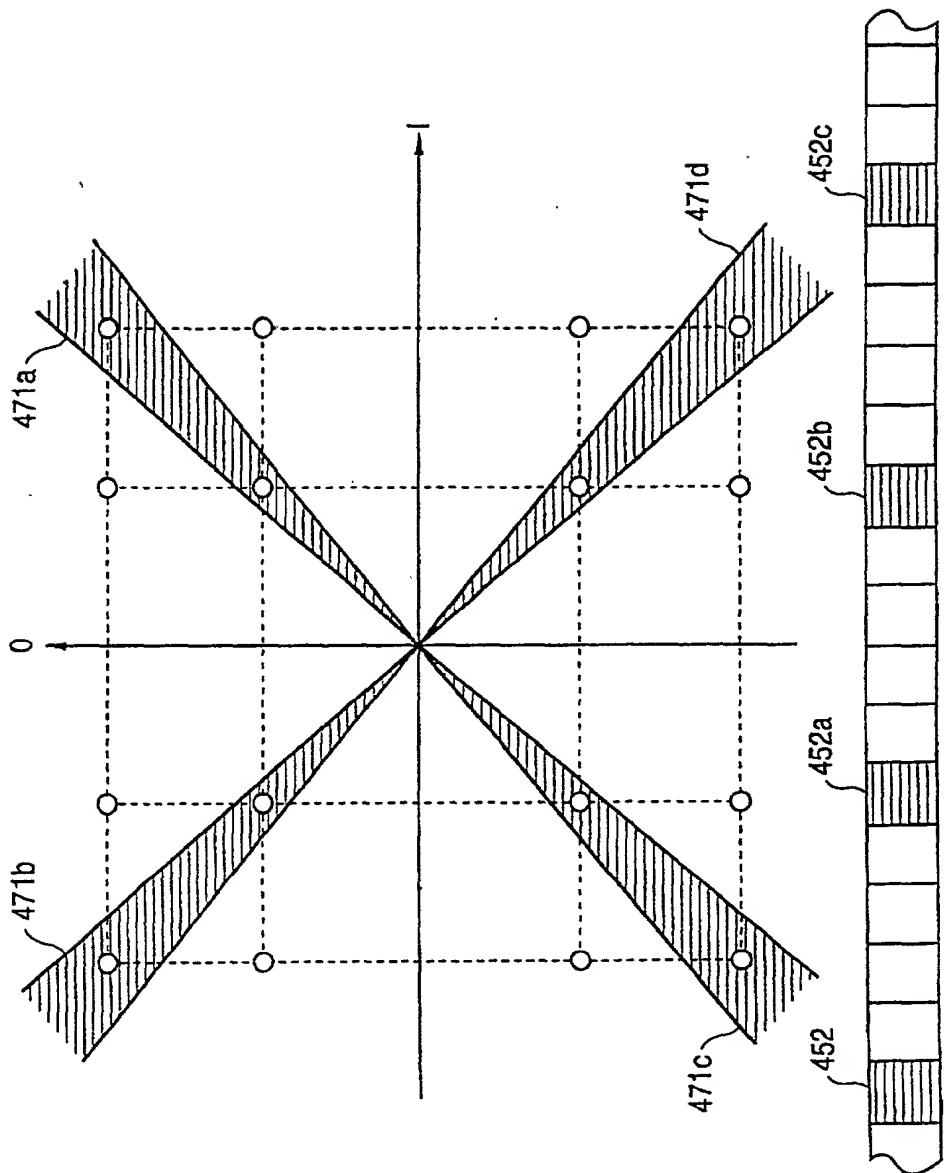


FIG. 40

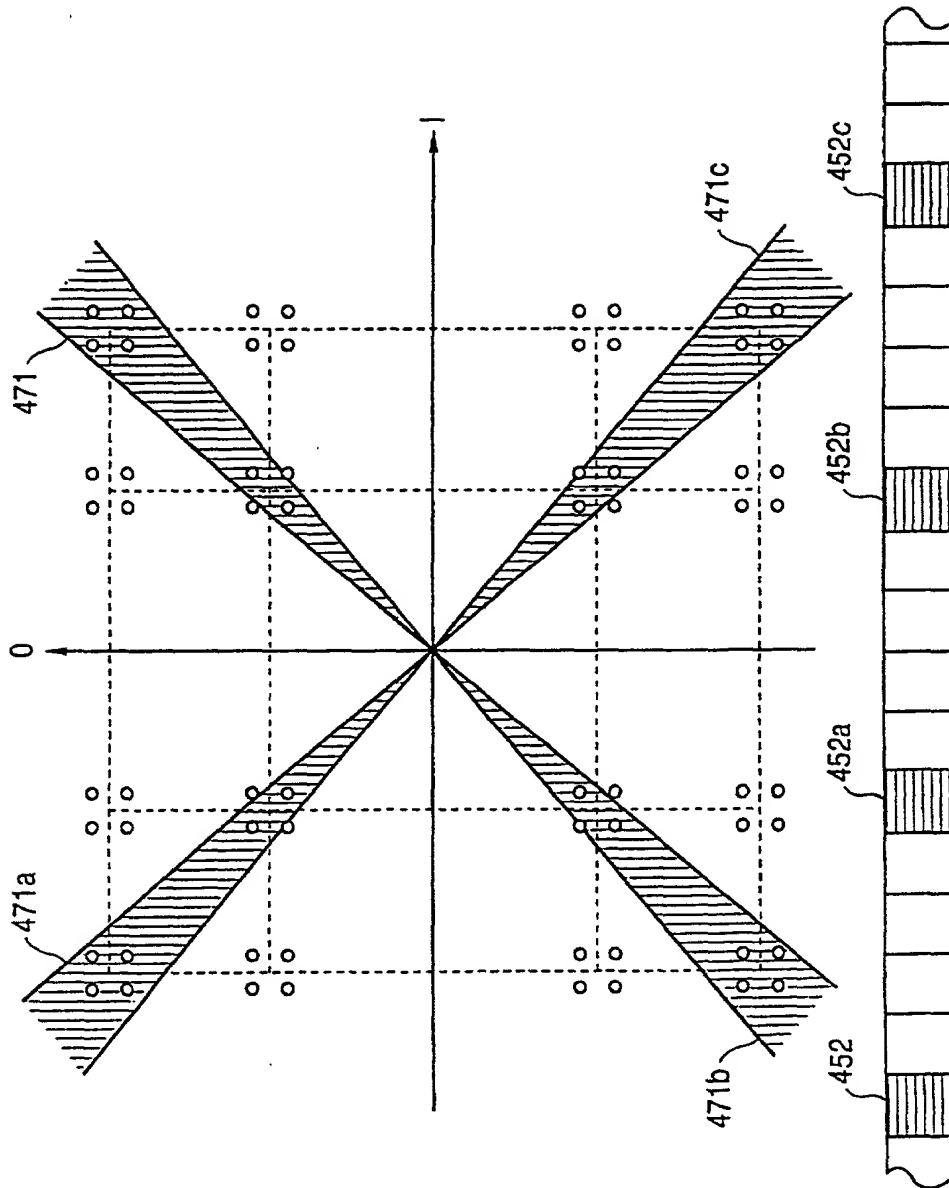


FIG. 41

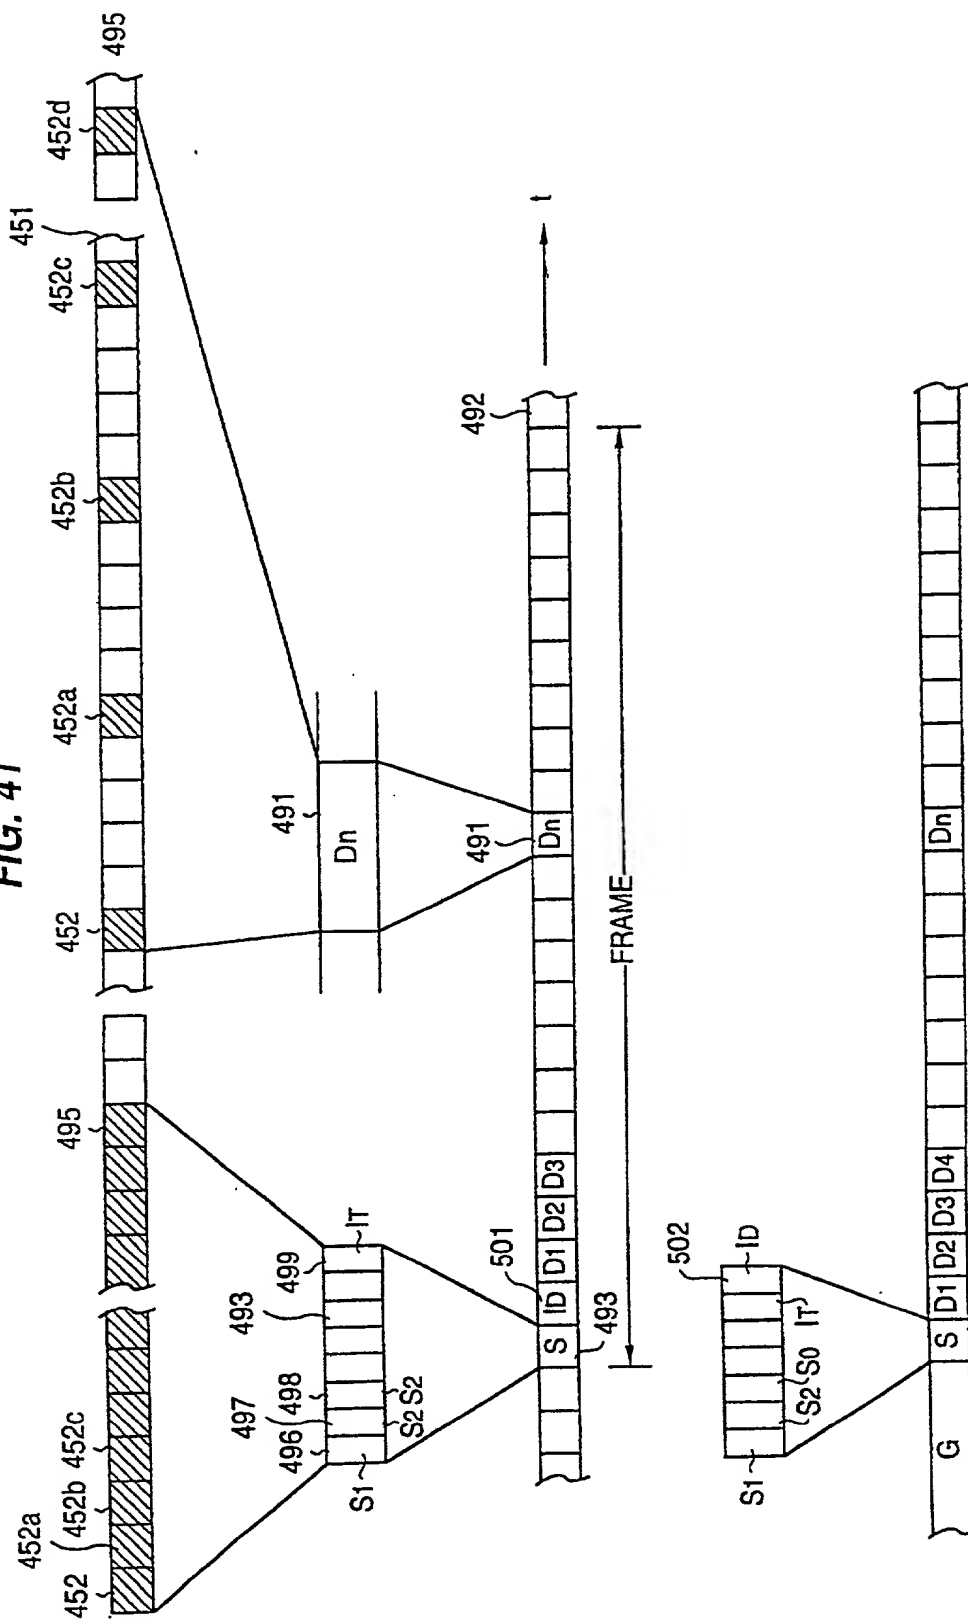


FIG. 42

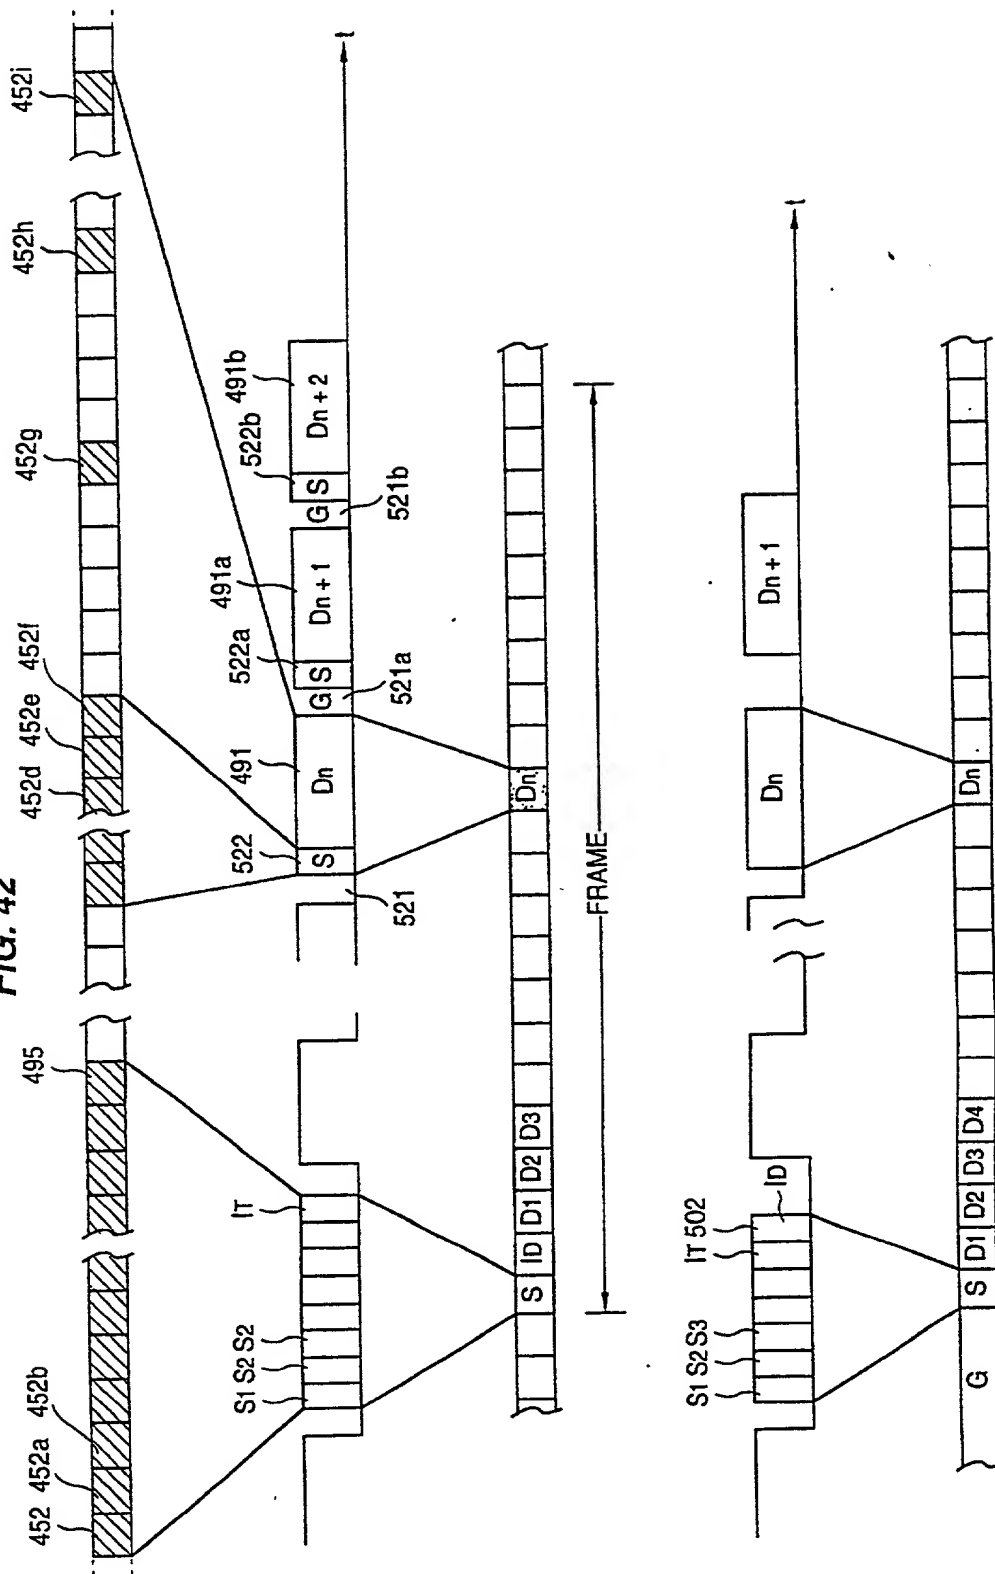


FIG. 43

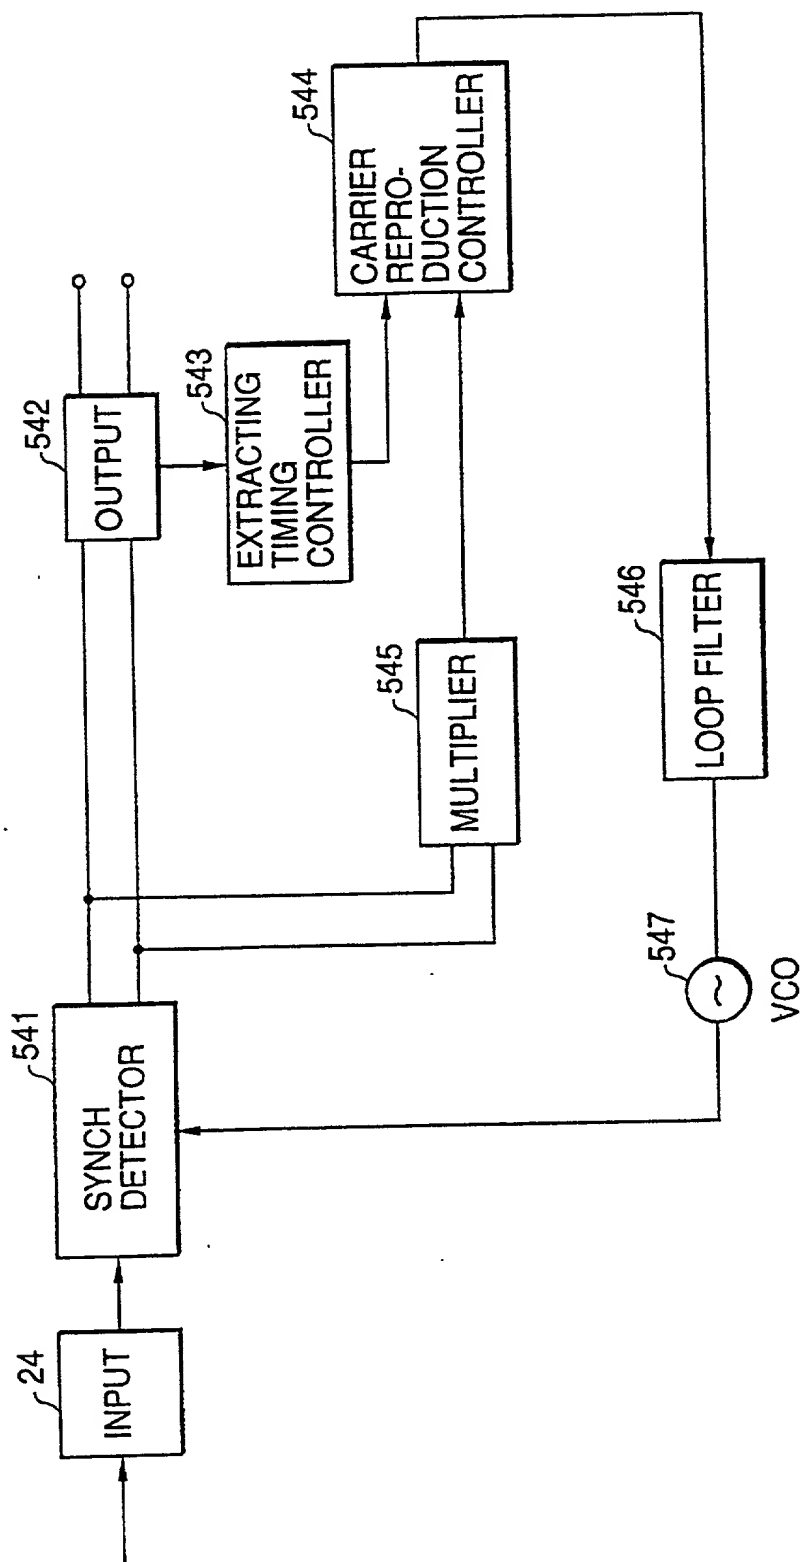


FIG. 44

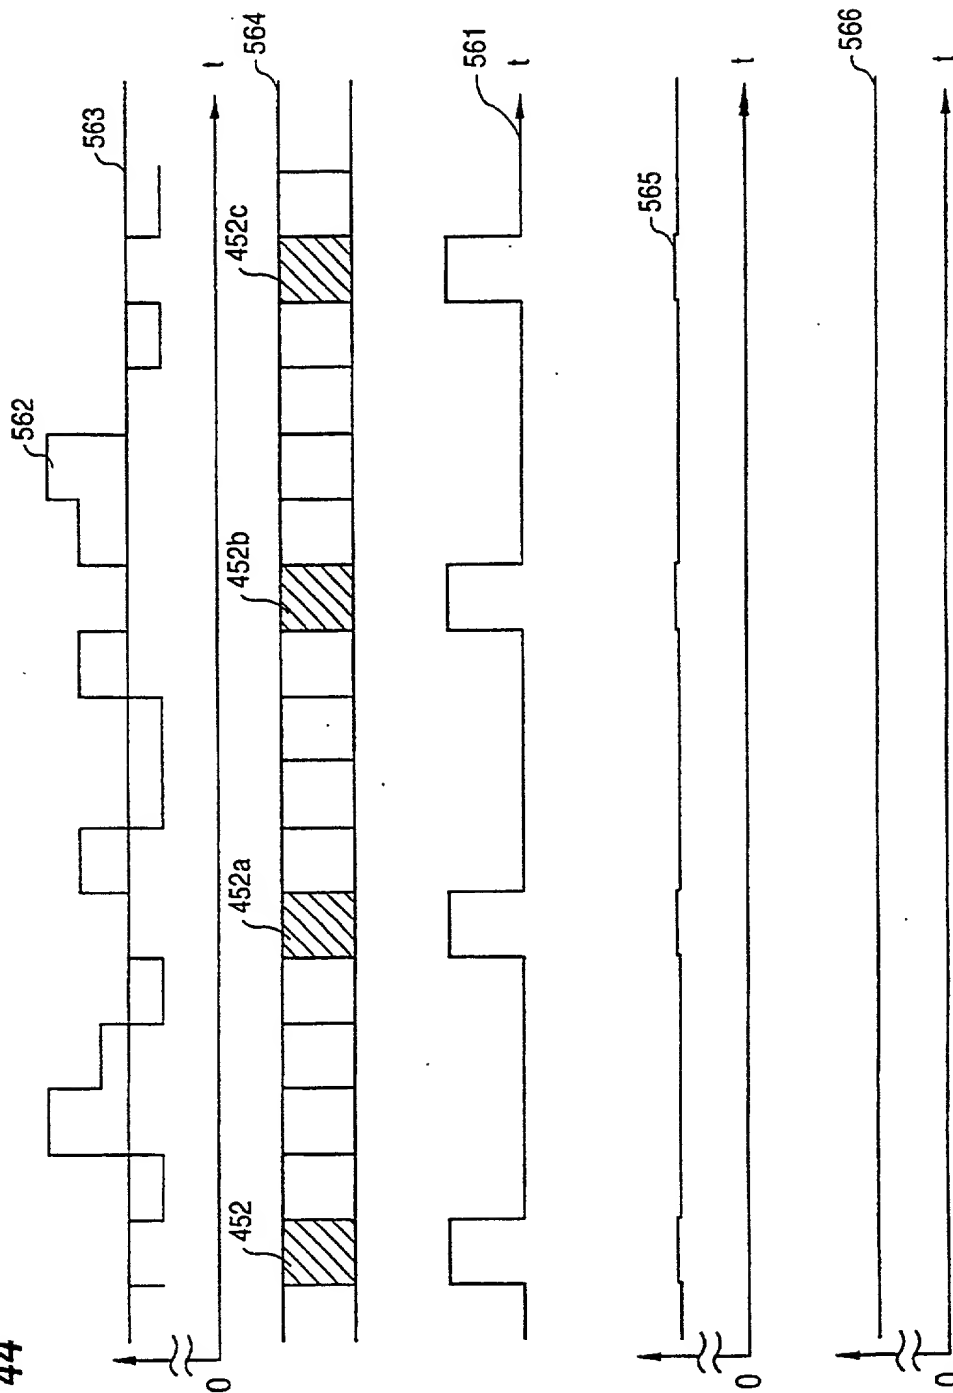


FIG. 45

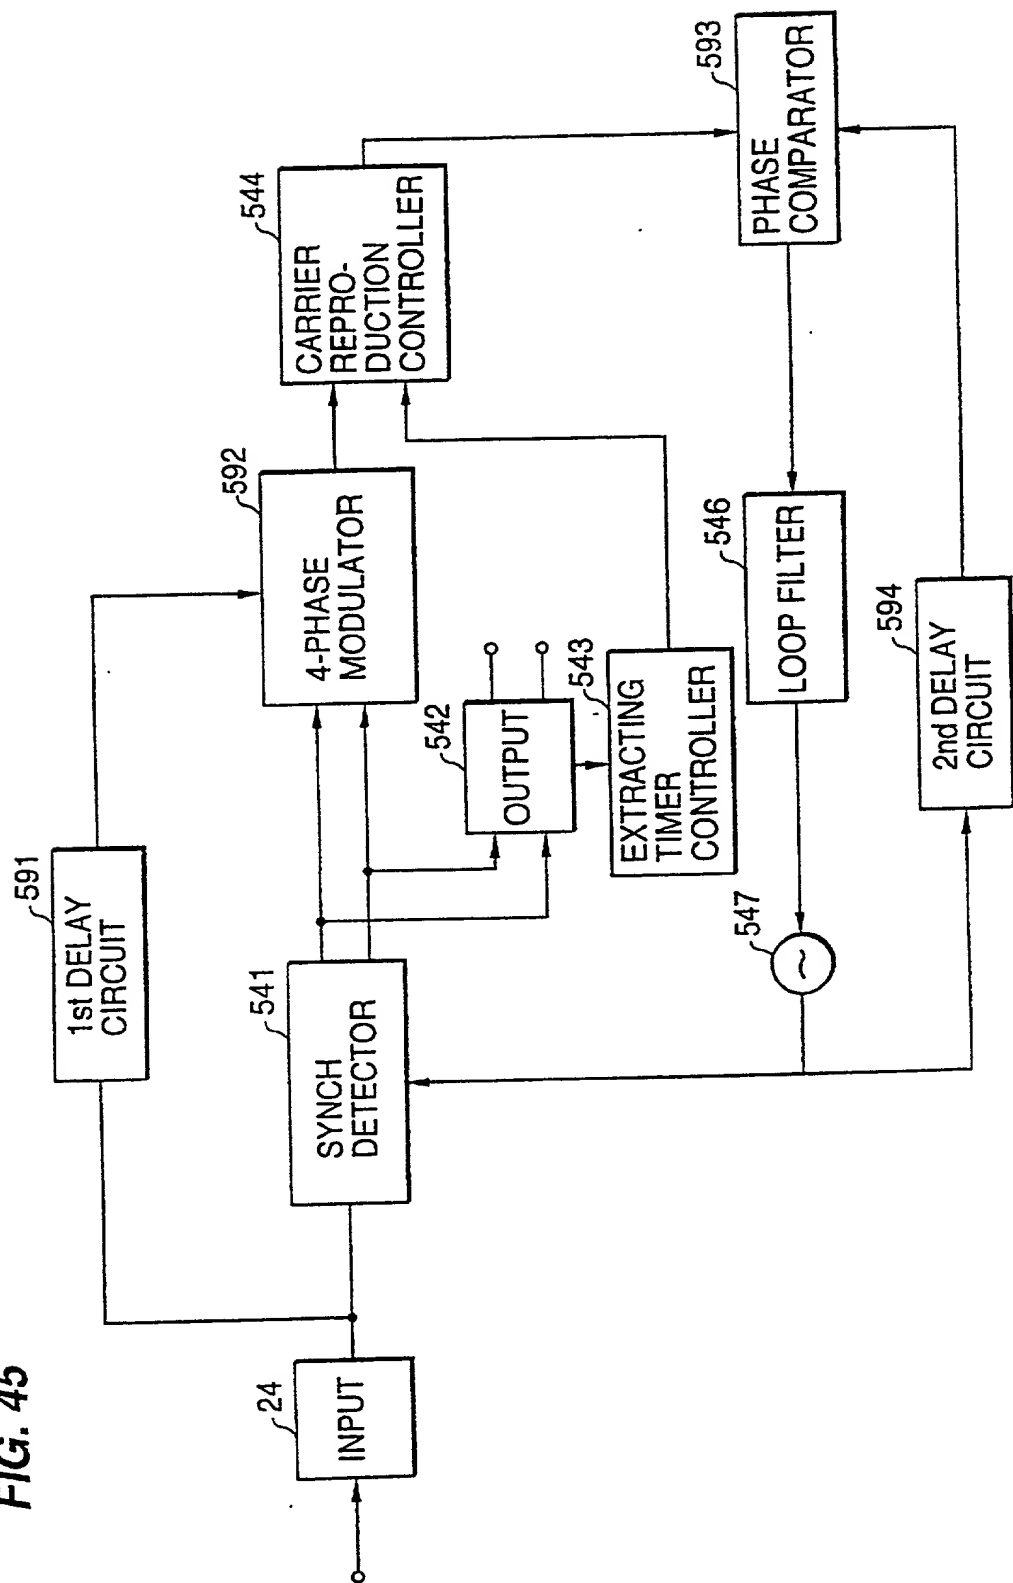


FIG. 46

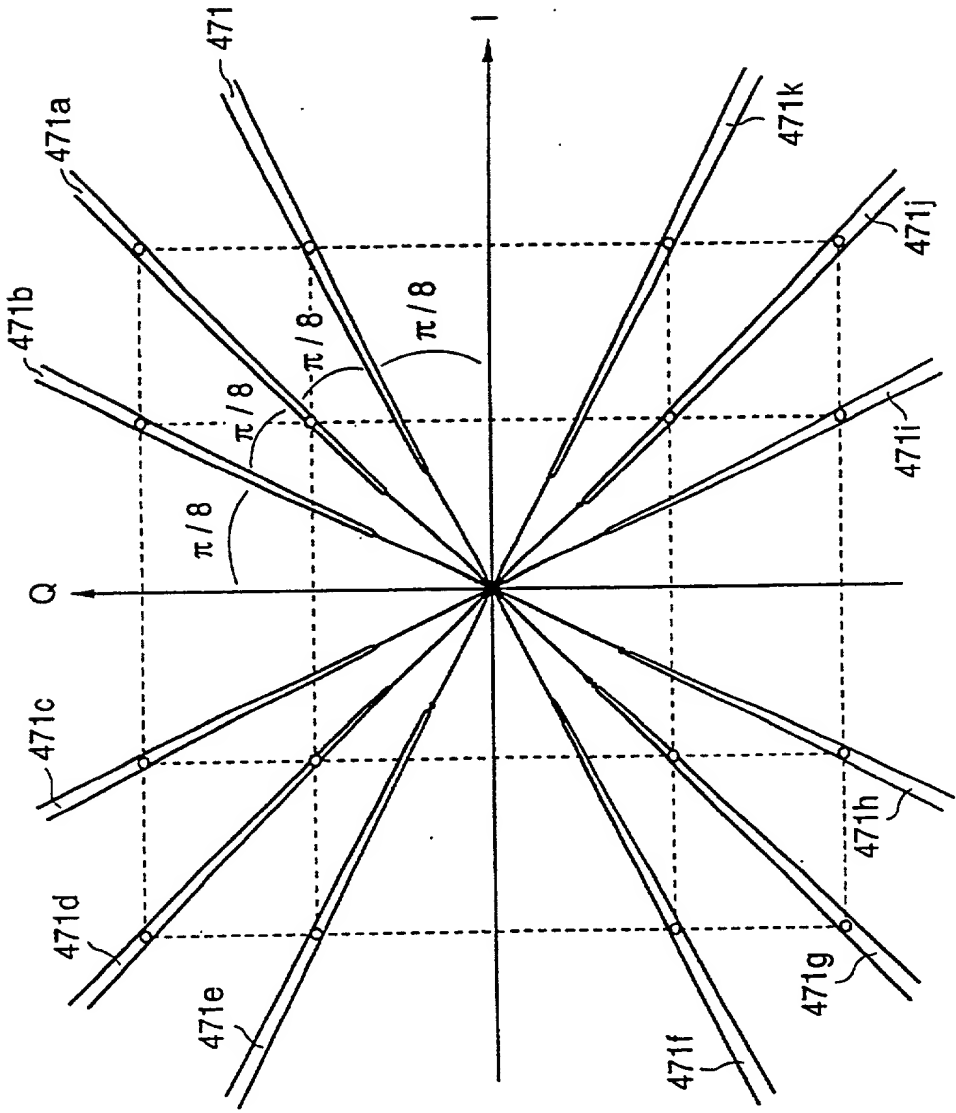


FIG. 47

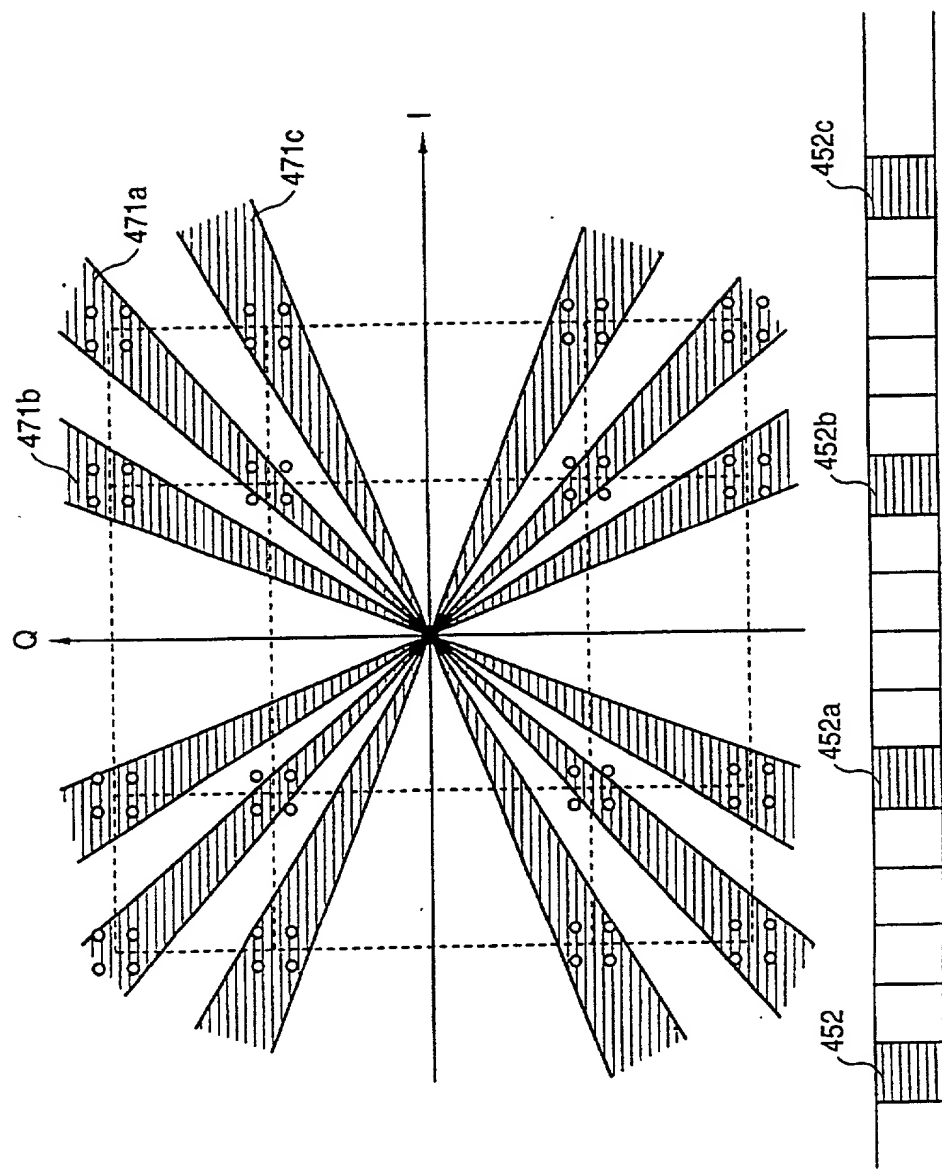


FIG. 48

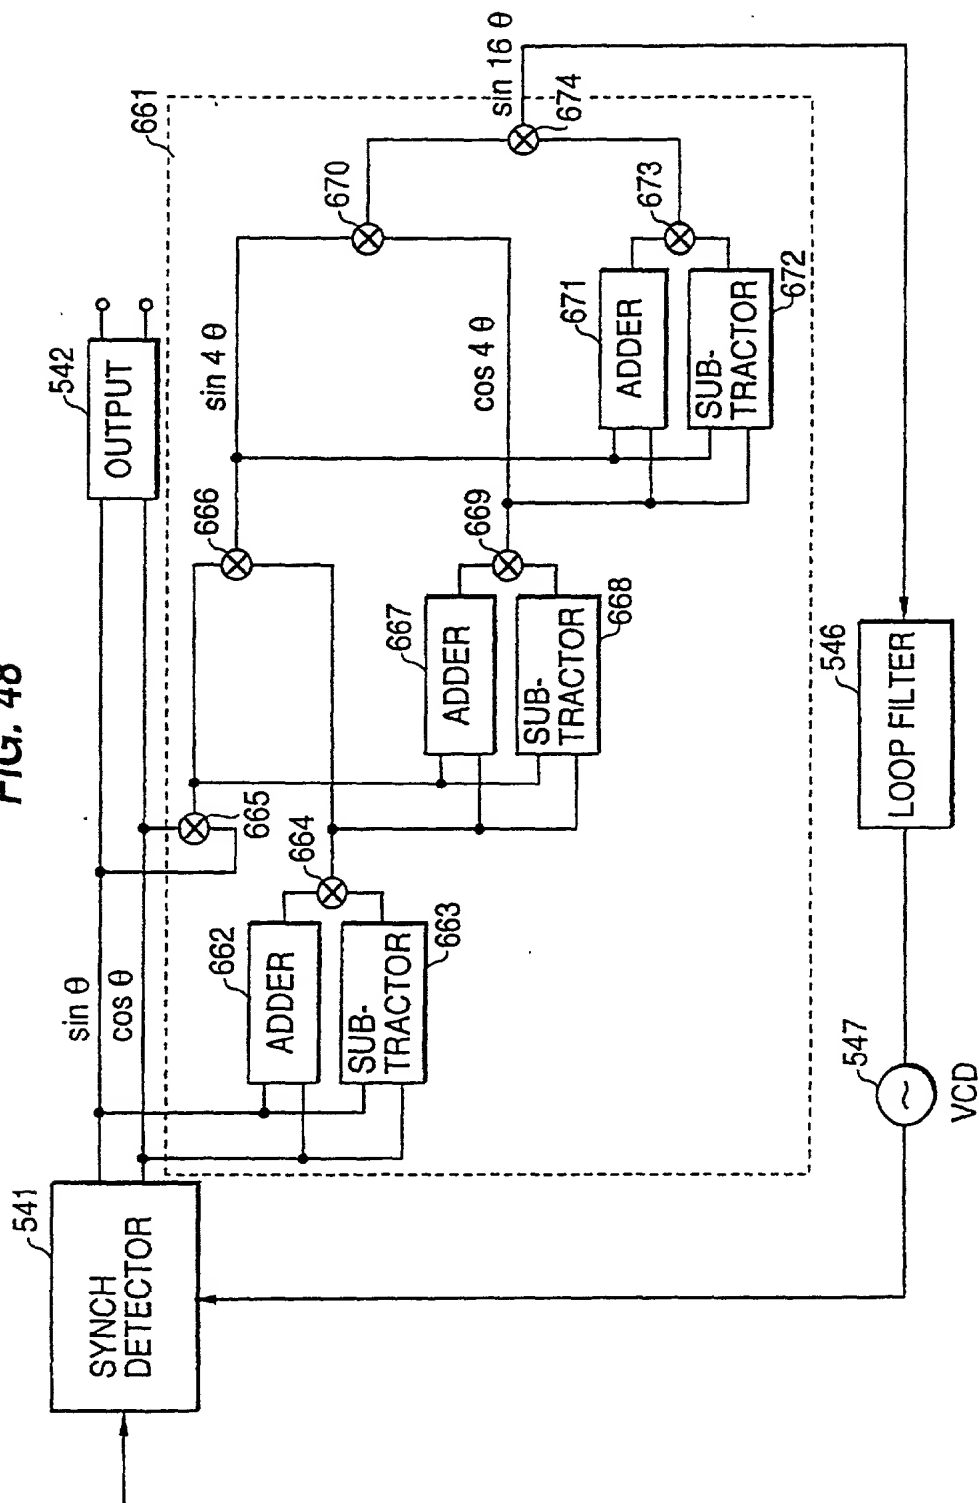


FIG. 49

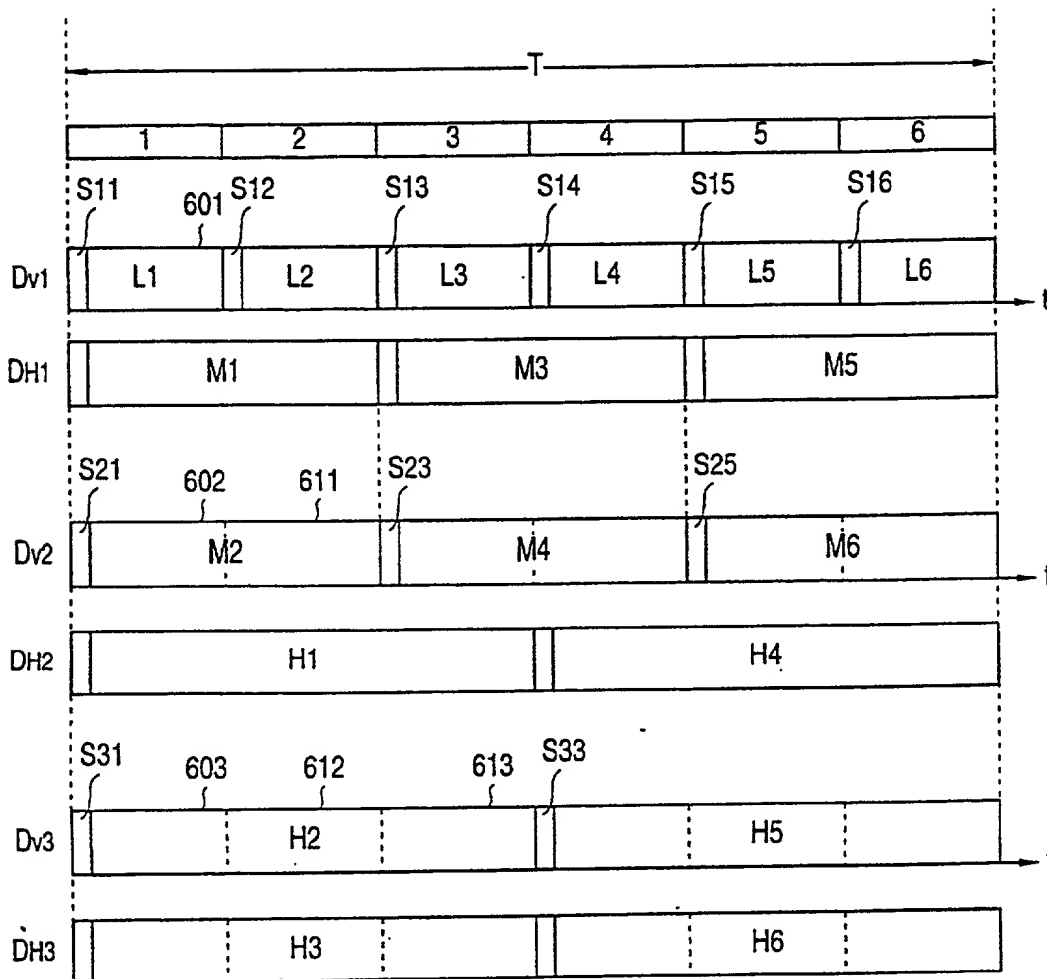


FIG. 50

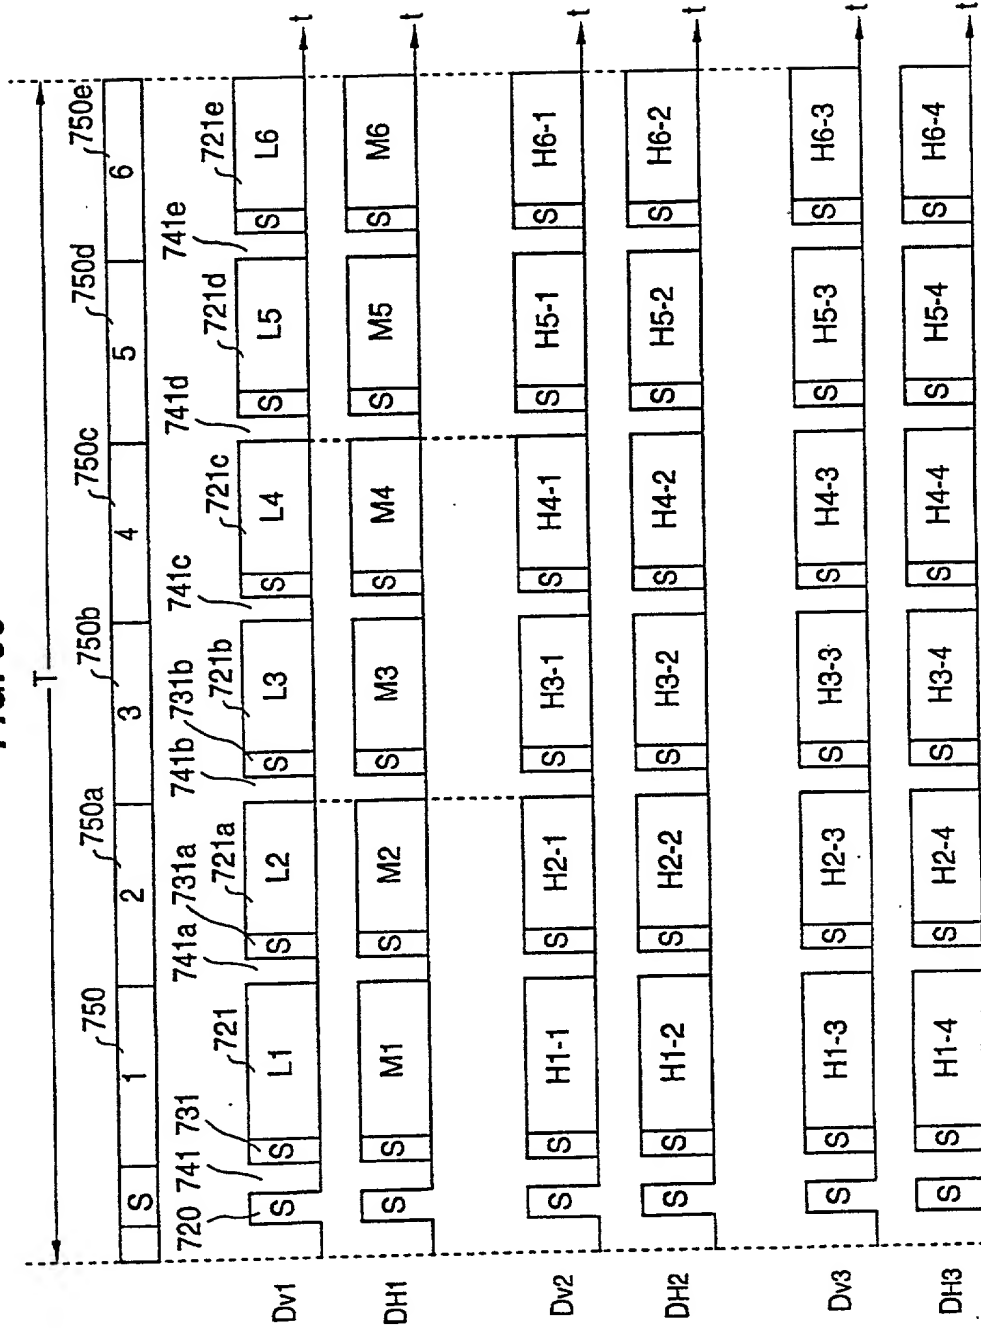


FIG. 51

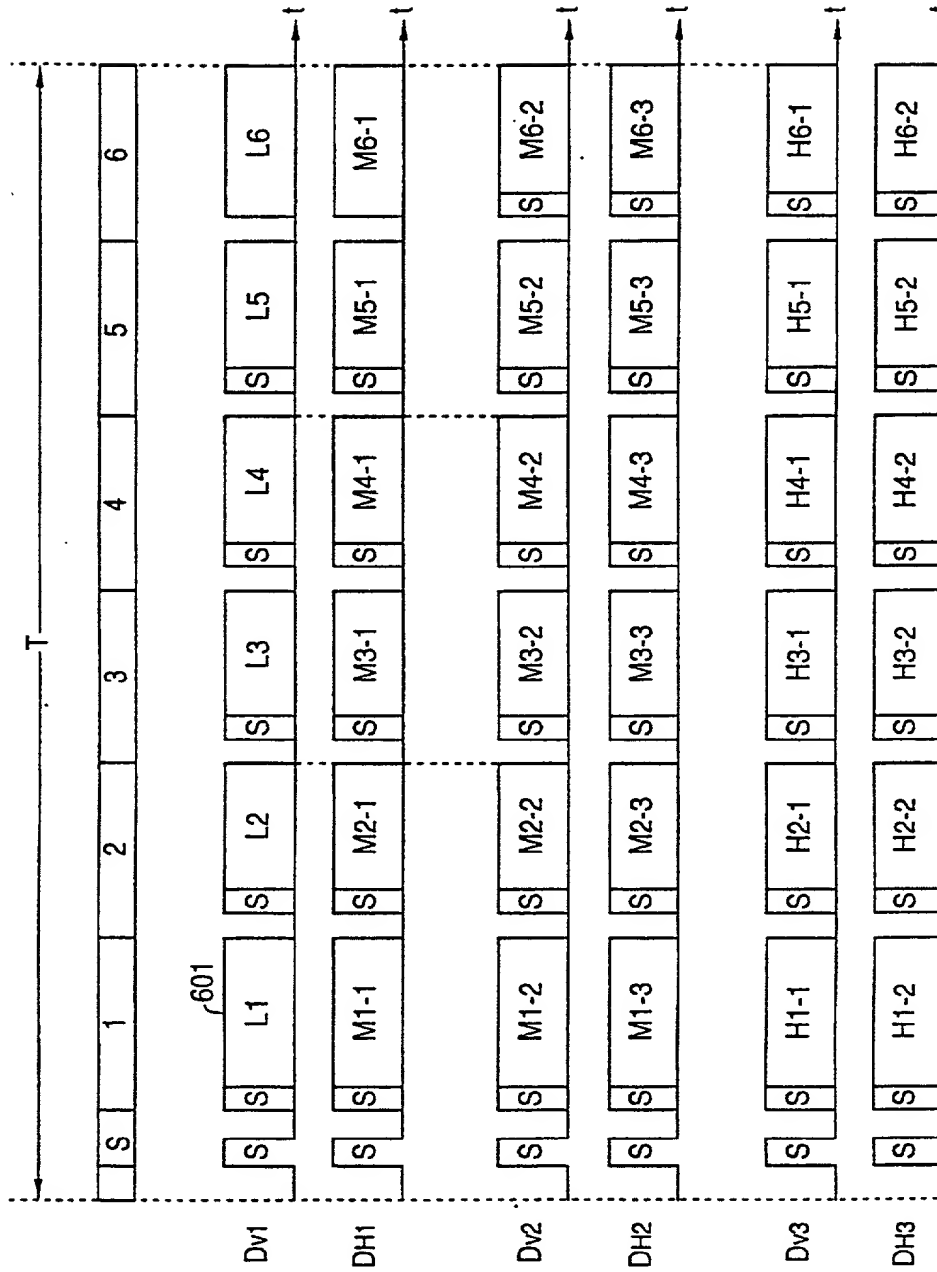


FIG. 52



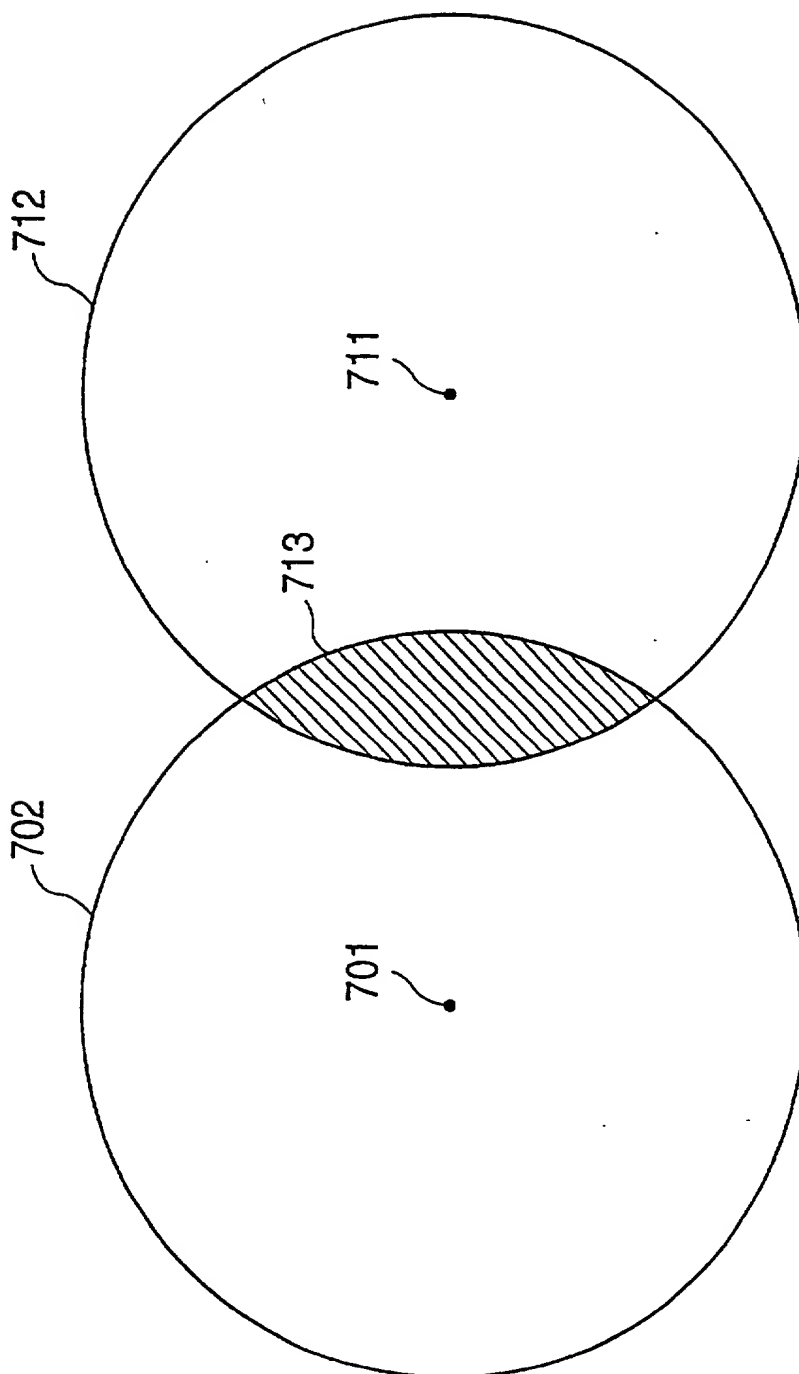


FIG. 53

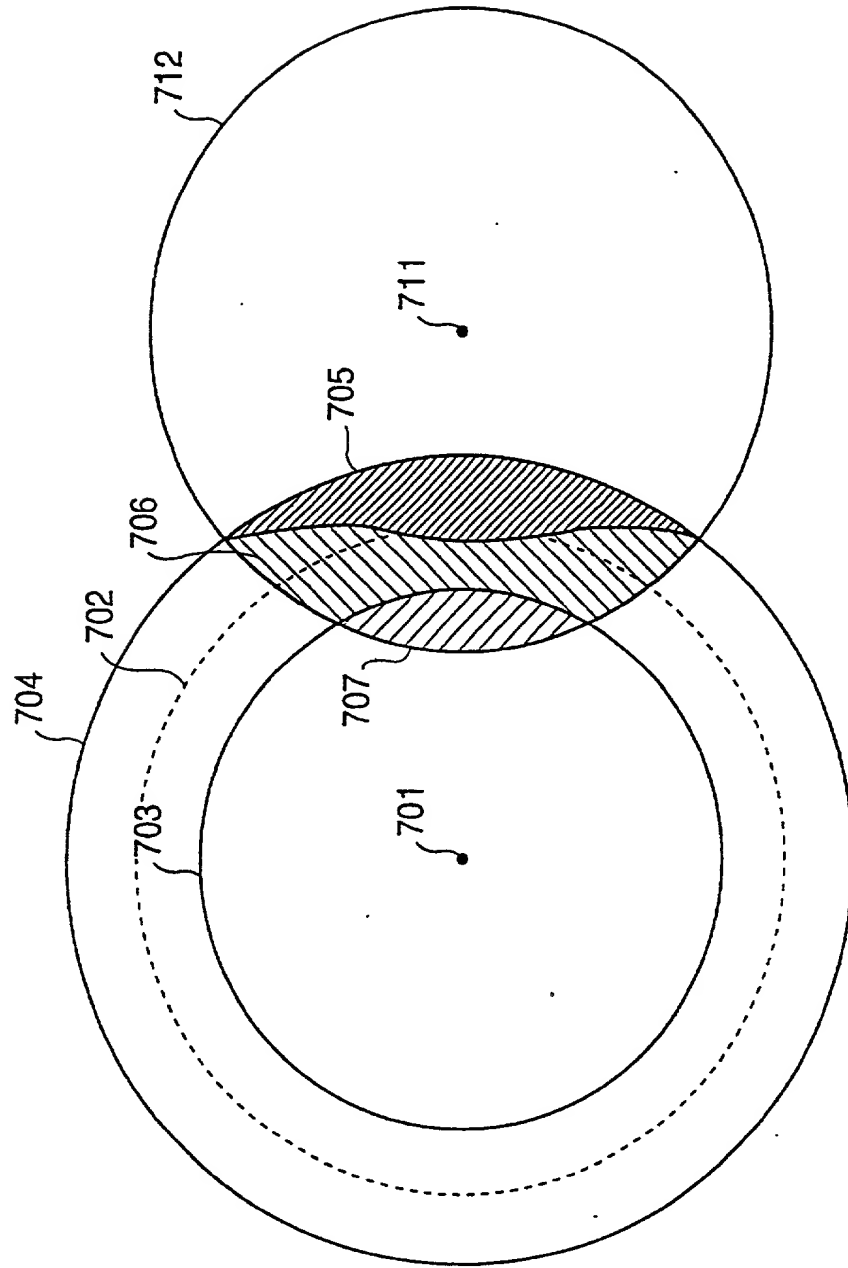


006260 94622960

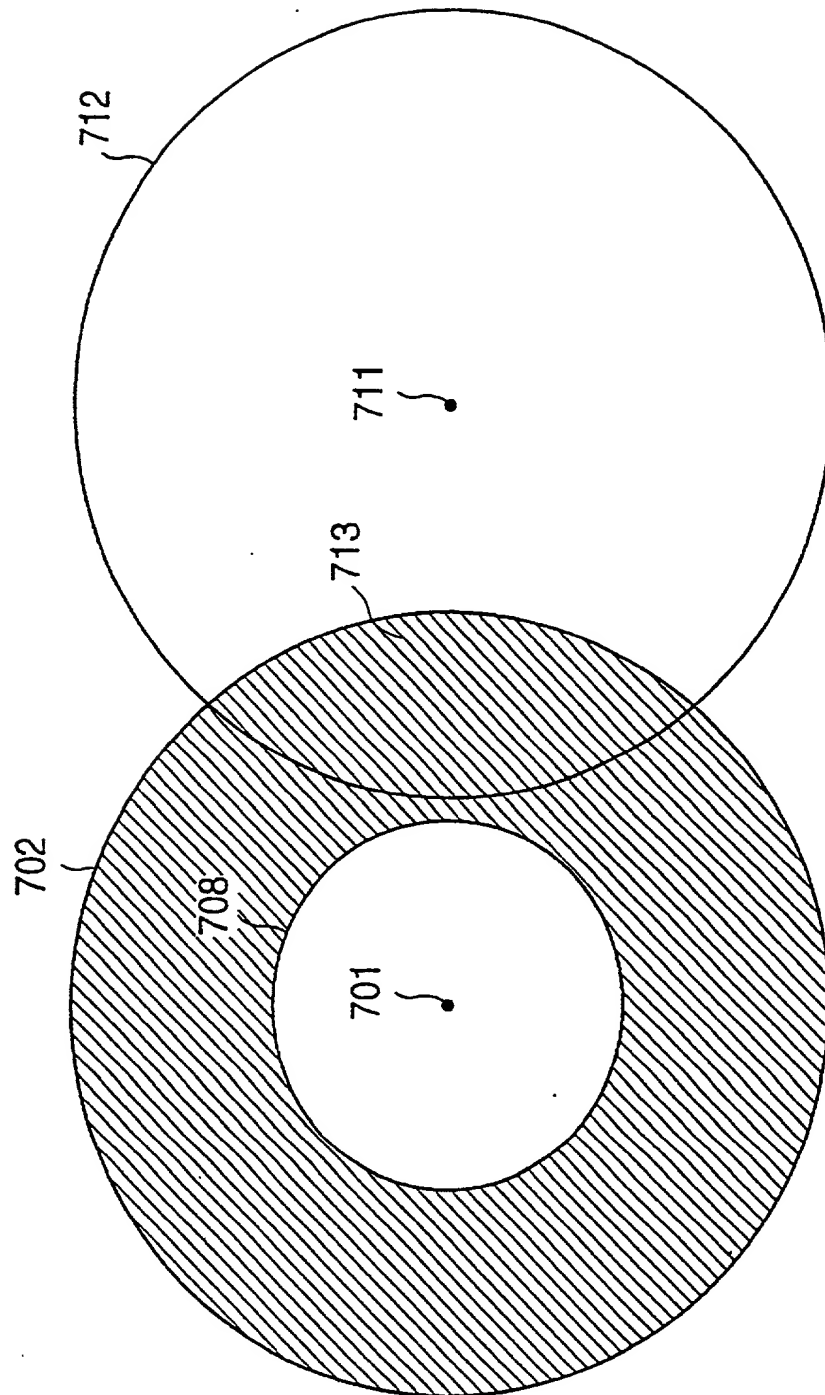FIG. 54




006260* 94624960

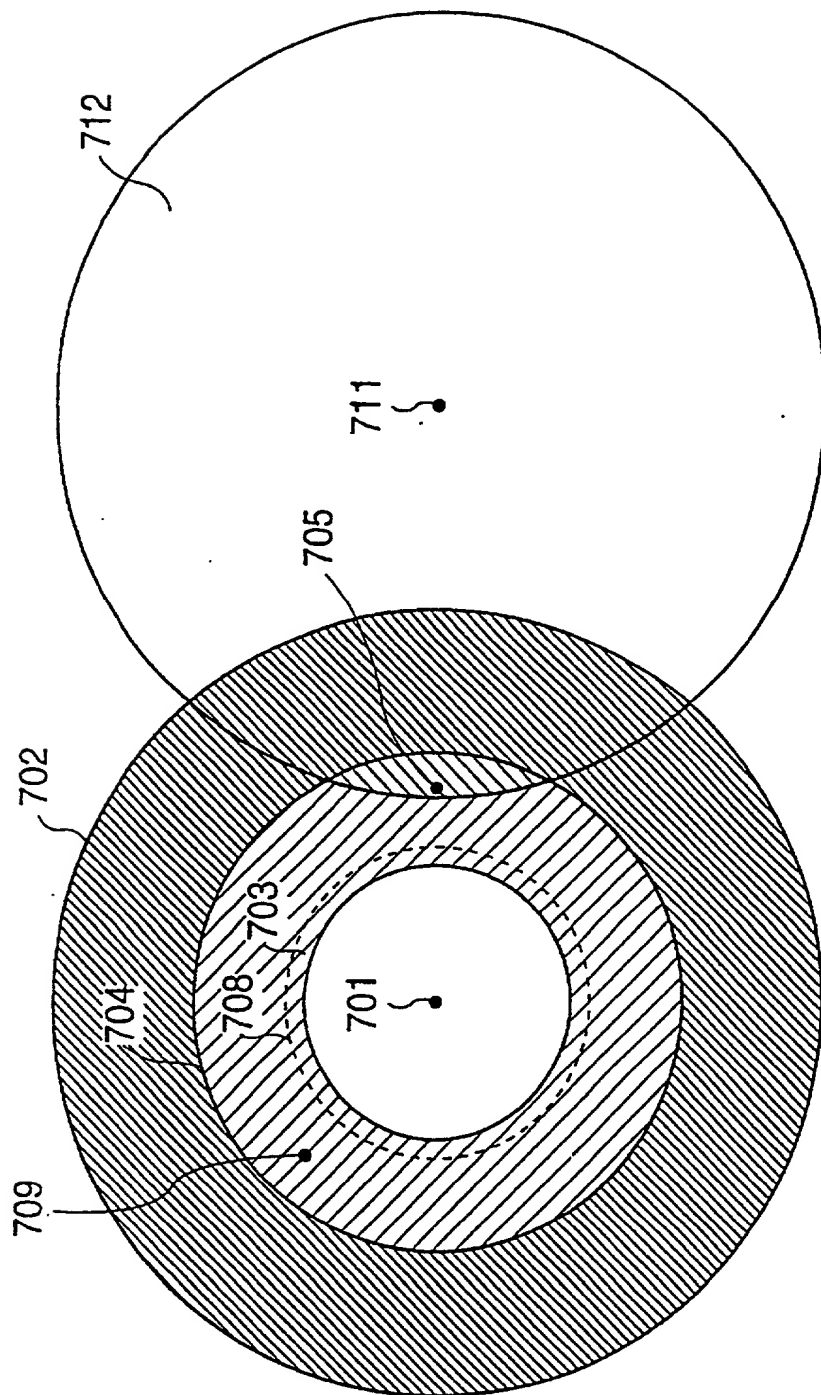FIG. 55



006260" 94622960

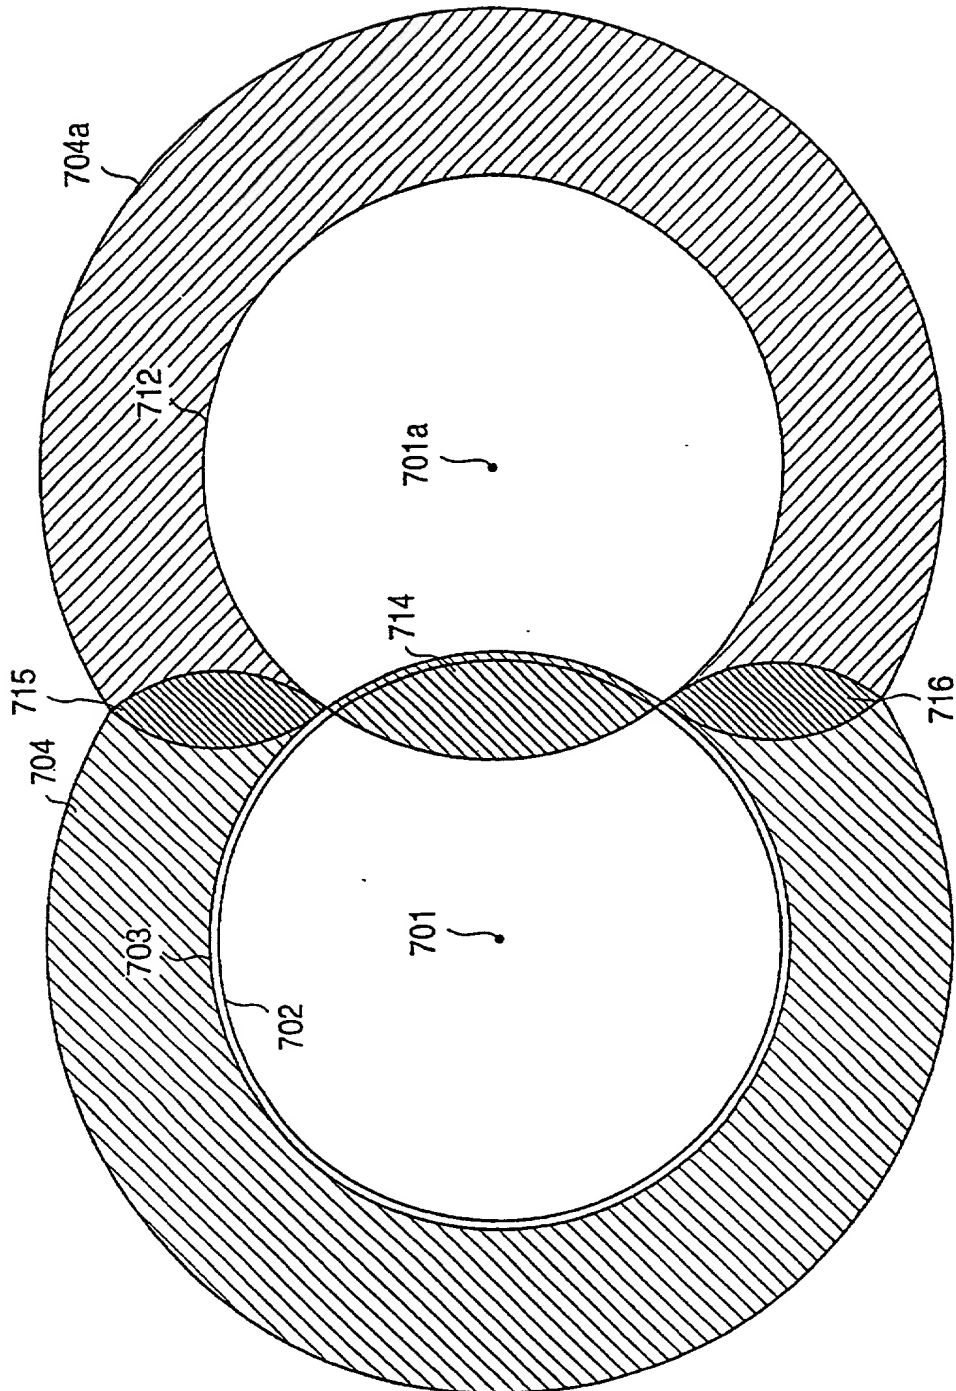FIG. 56



006260" 91622960

FIG. 57

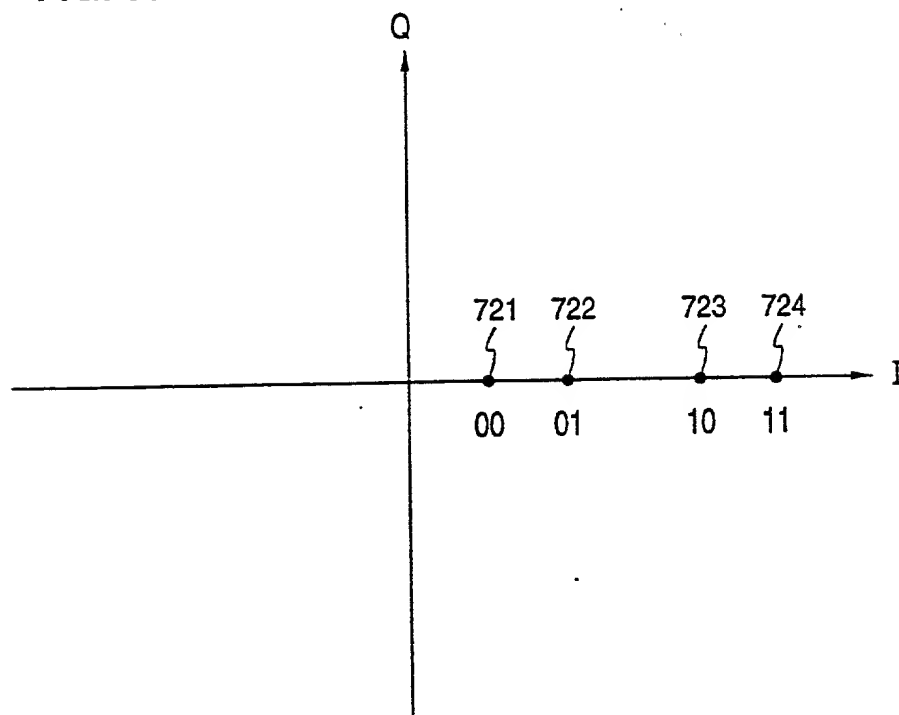


FIG. 58

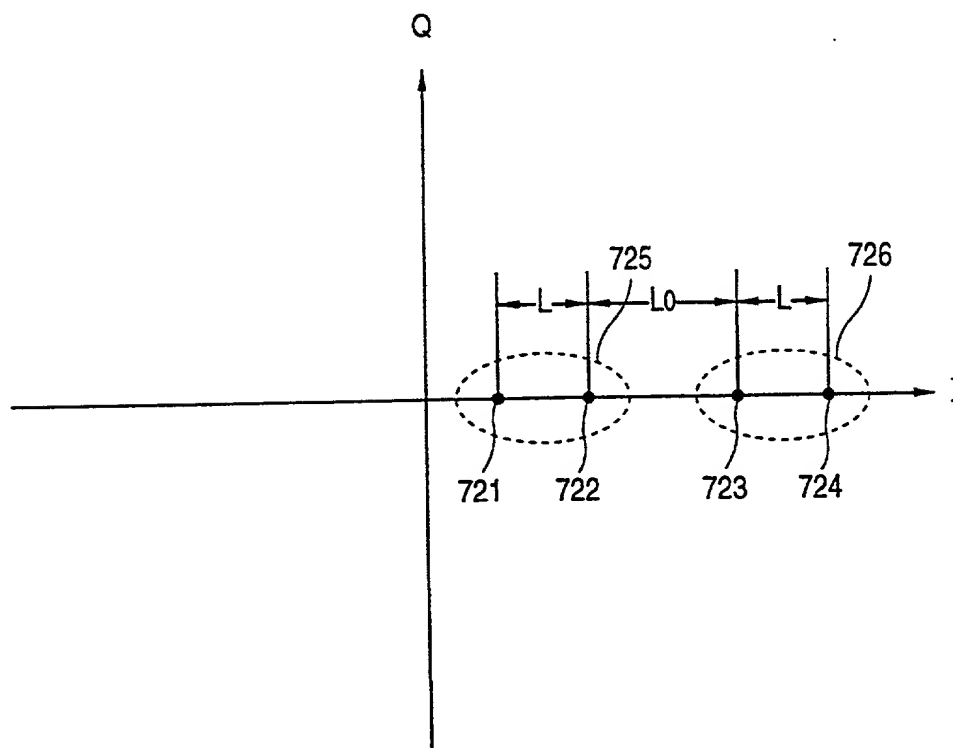


FIG. 59(a)

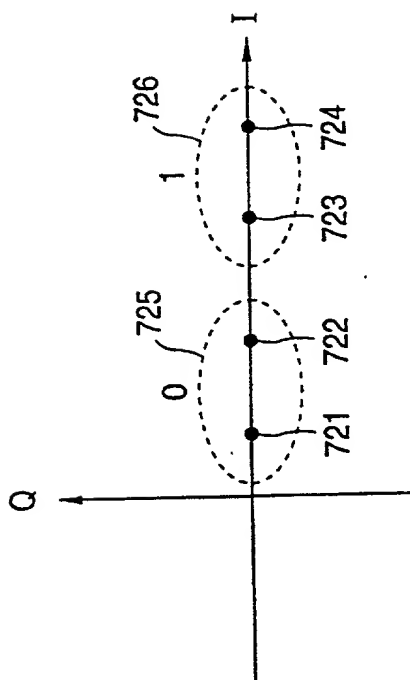


FIG. 59(c)

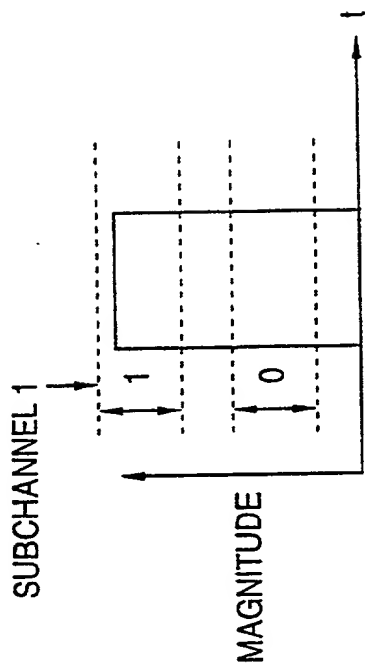


FIG. 59(b)



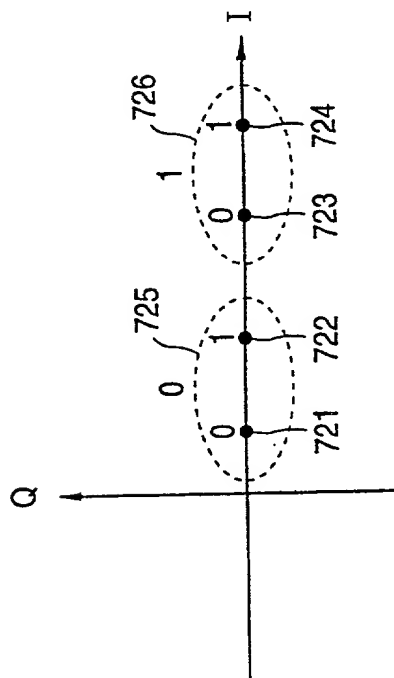


FIG. 59(d)

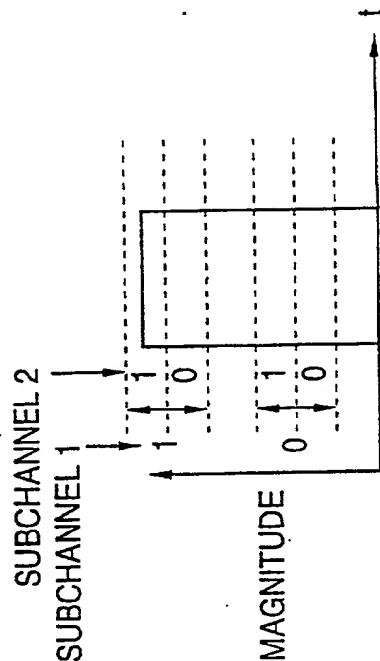

006260" 94622960

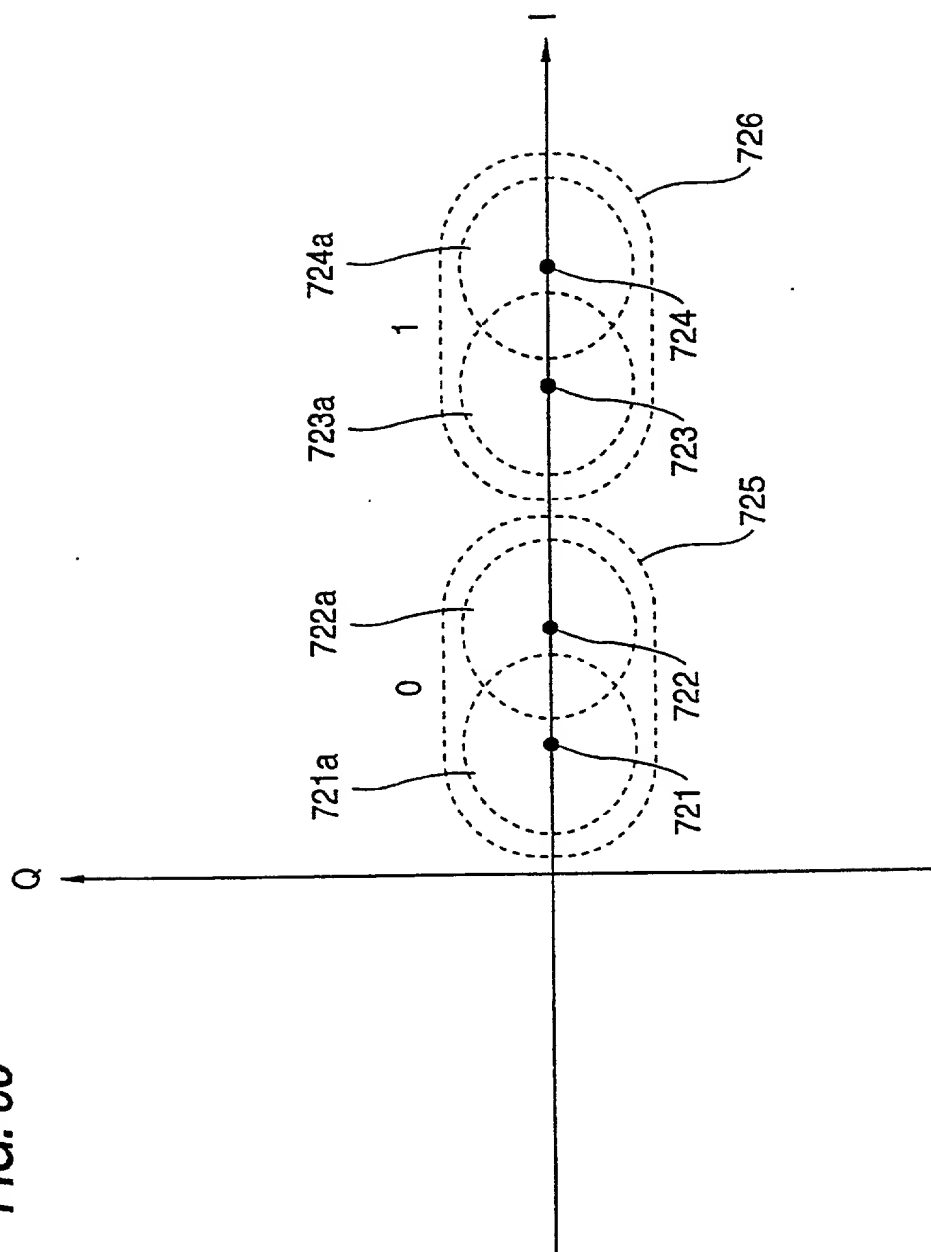FIG. 60



006260" 94622960

FIG. 61

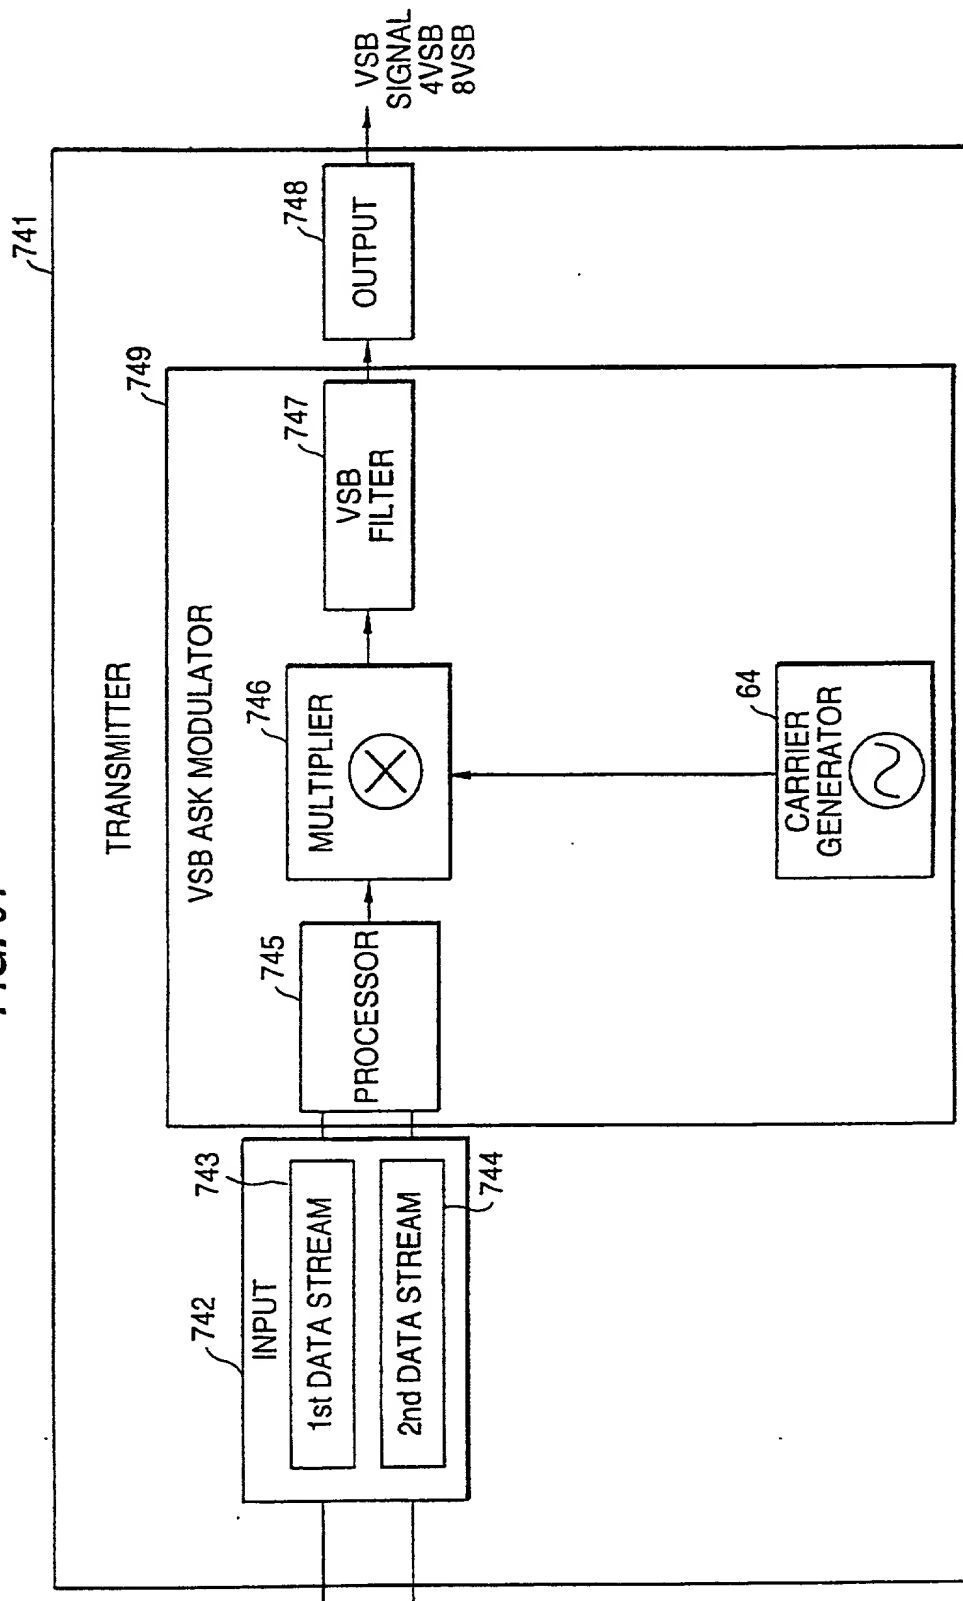


FIG. 62(a)

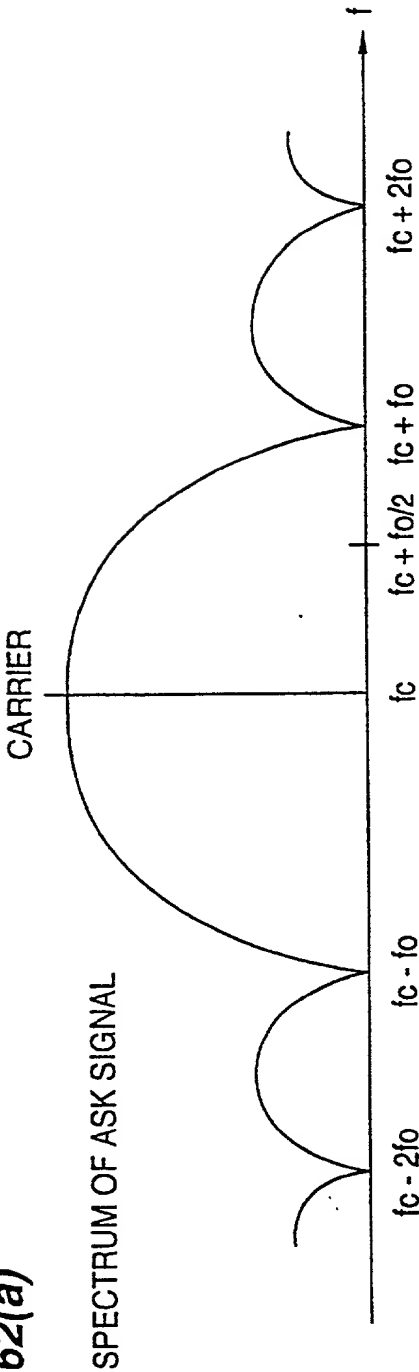


FIG. 62(b)

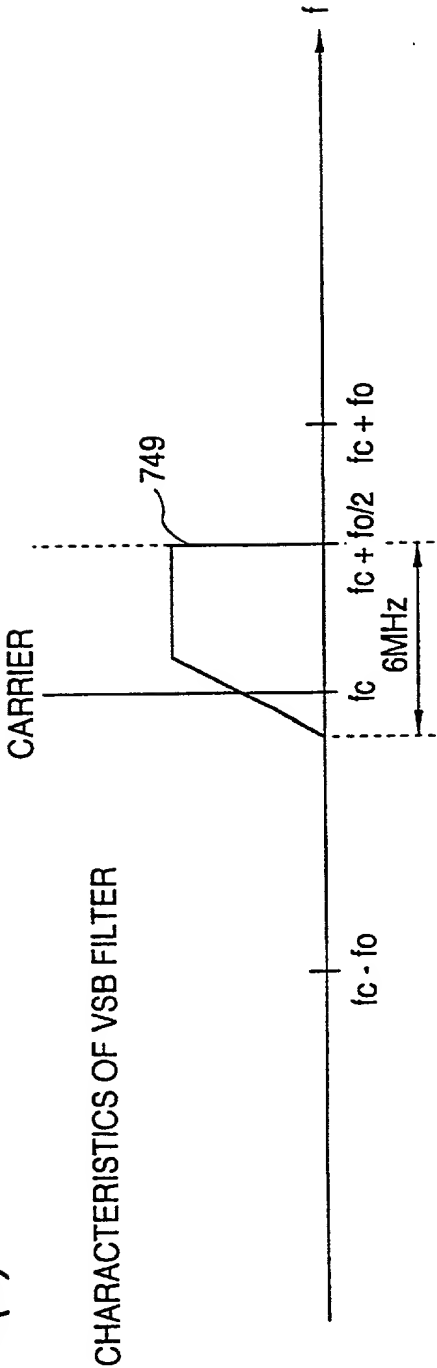


FIG. 63

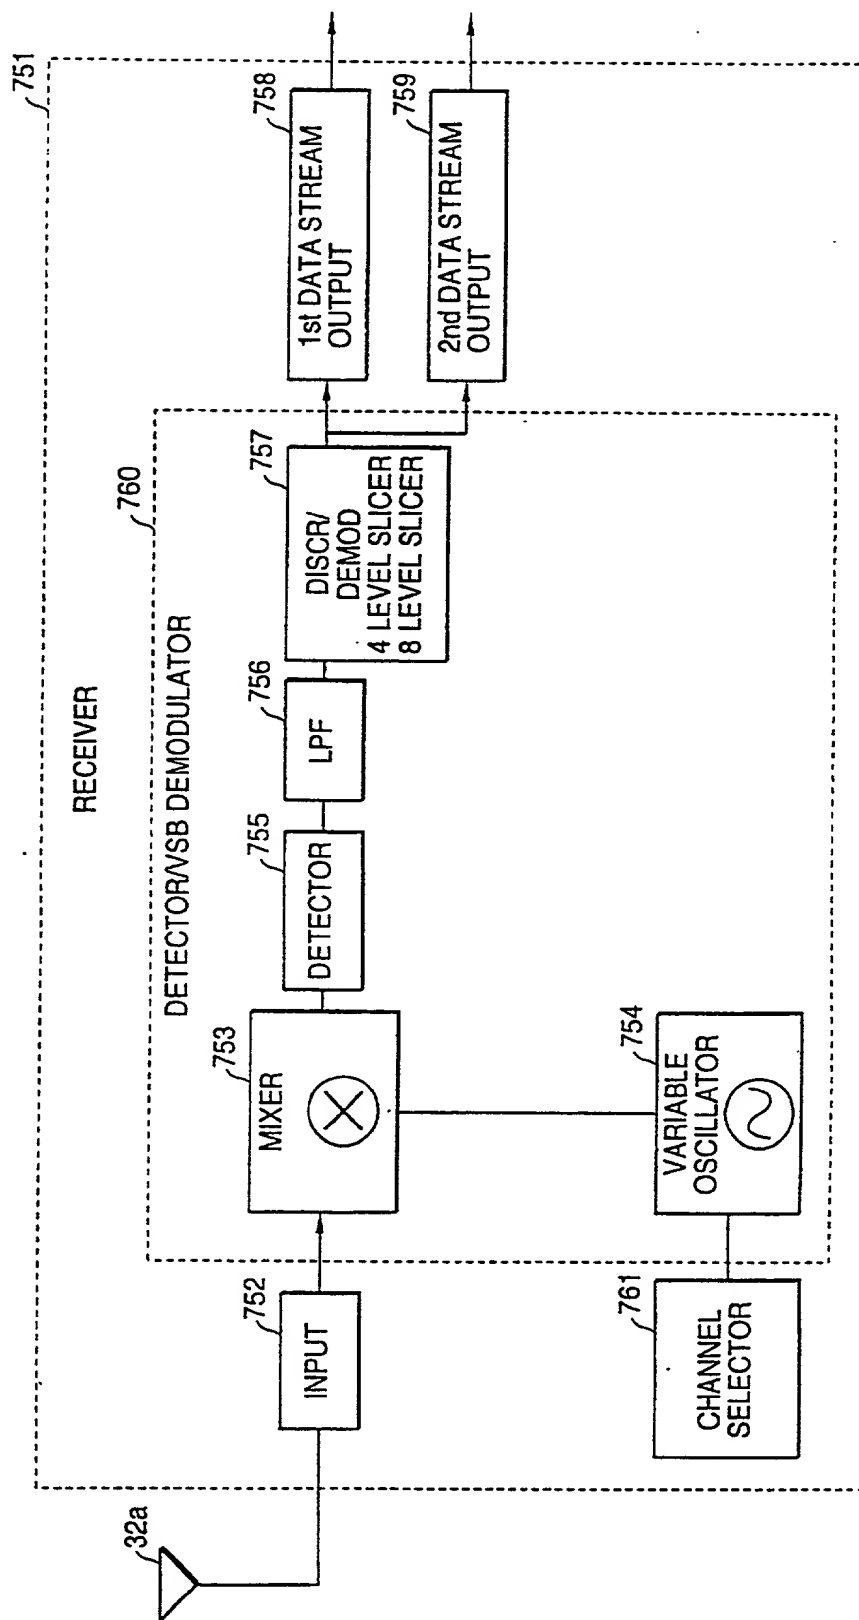


FIG. 64

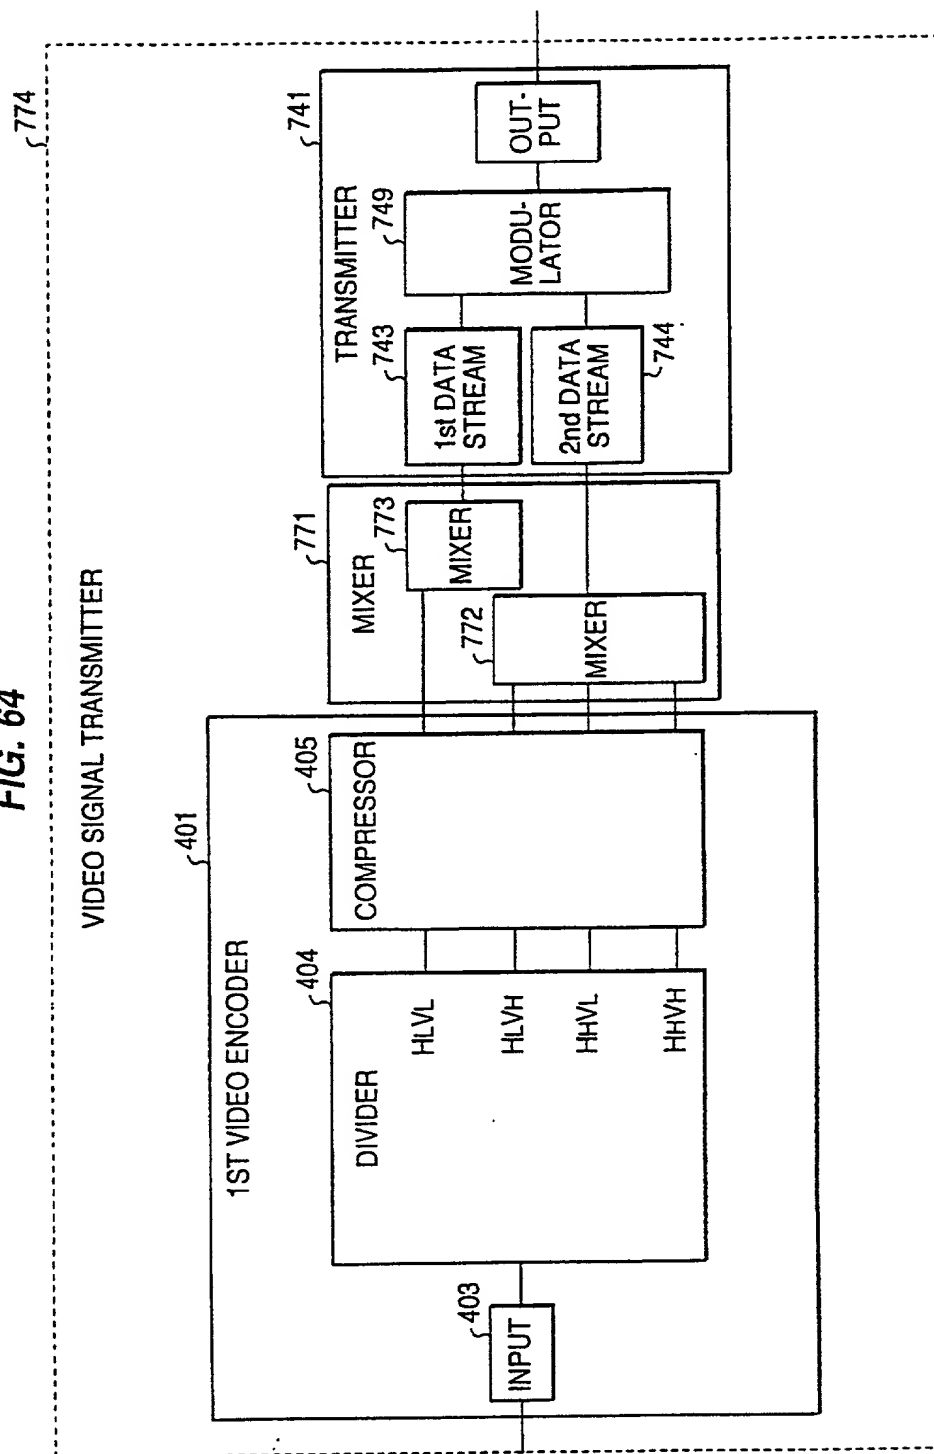


FIG. 65



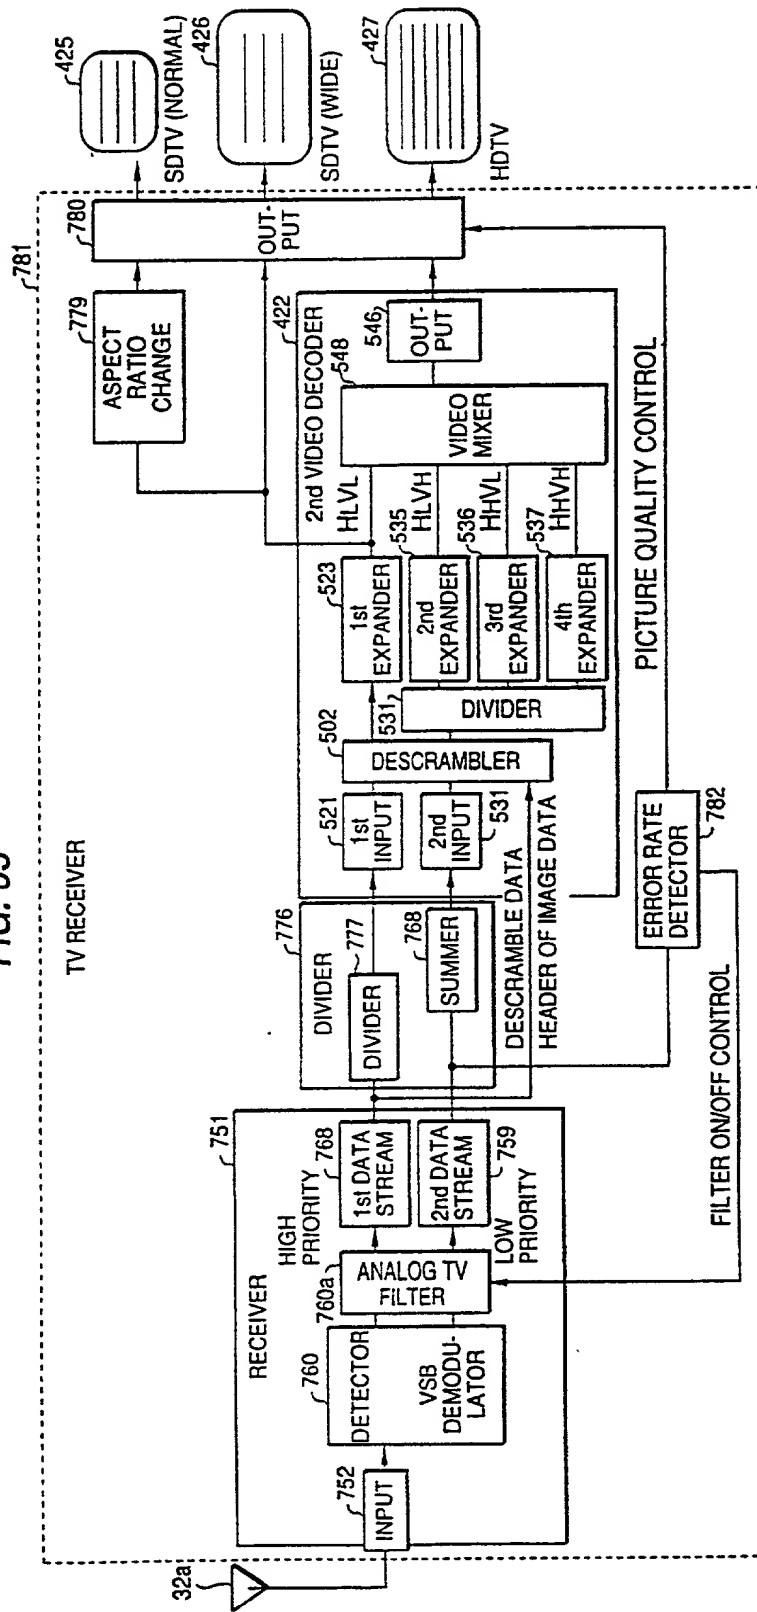


FIG. 66

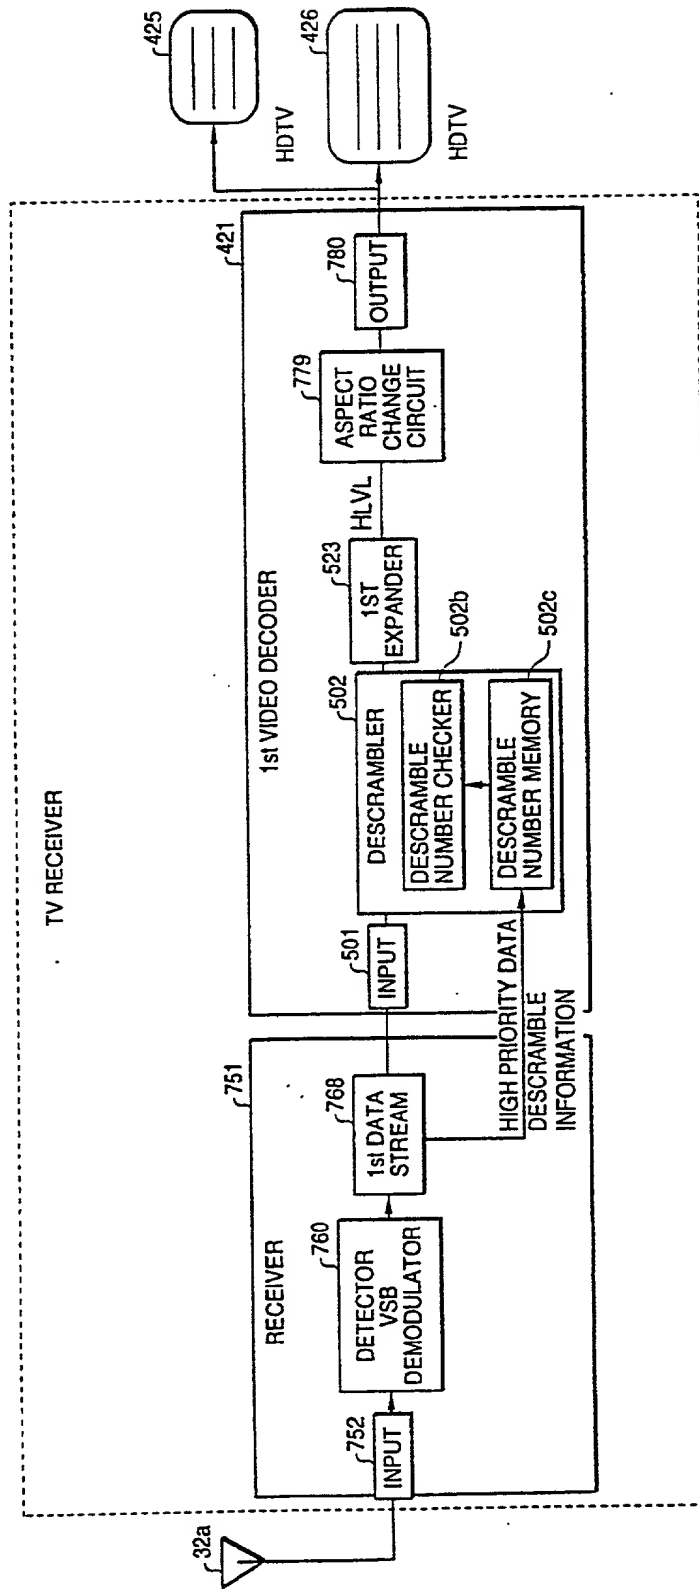

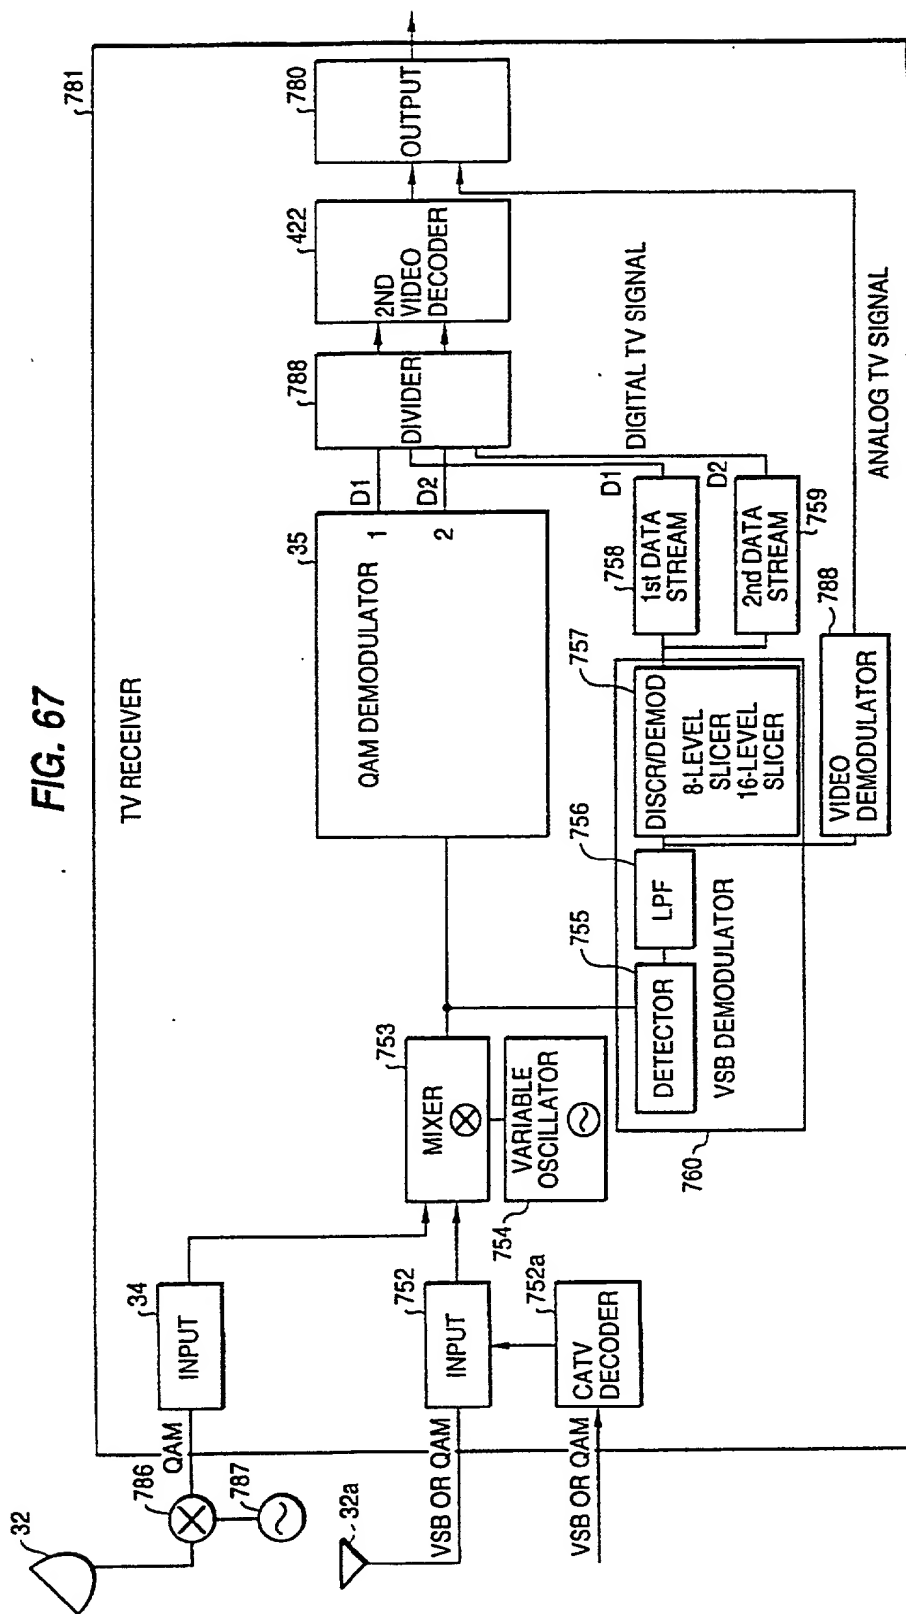

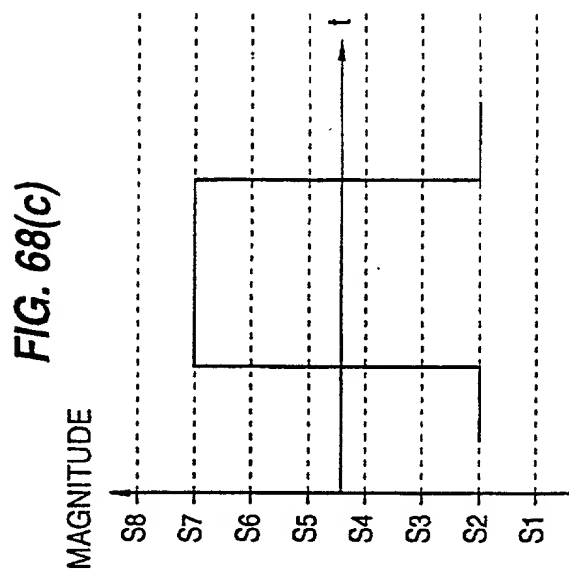
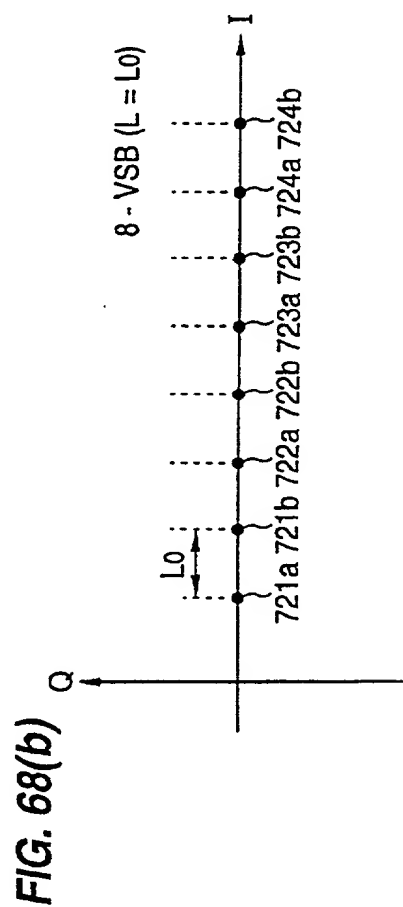
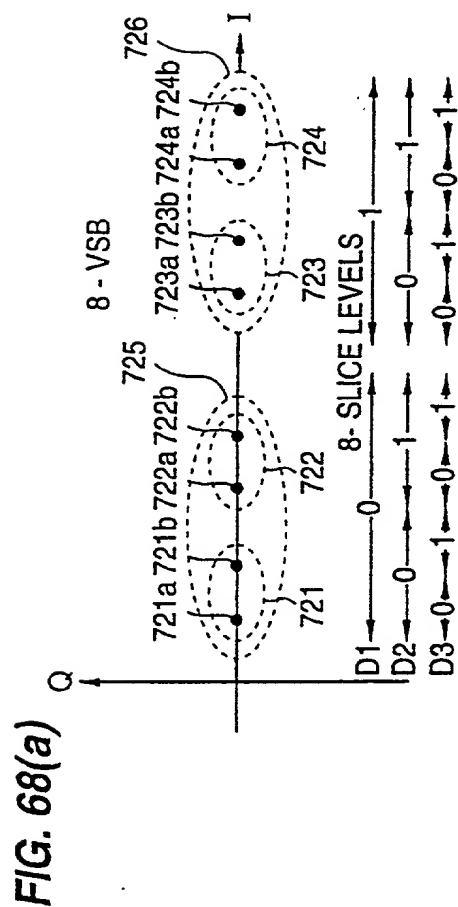


FIG. 69

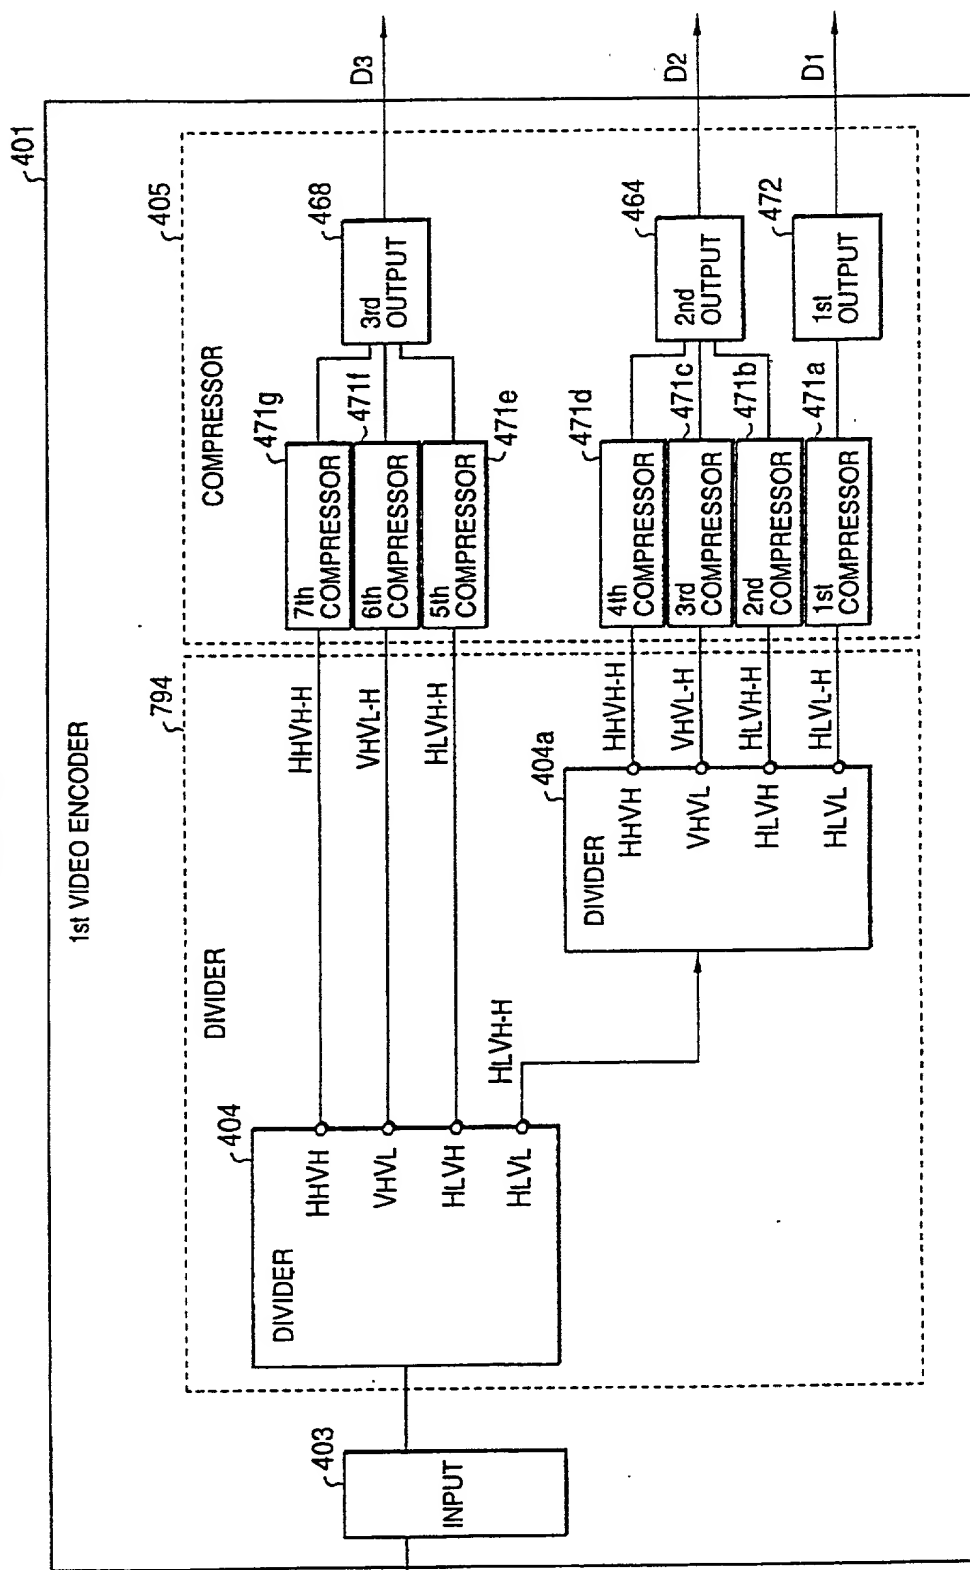


FIG. 70

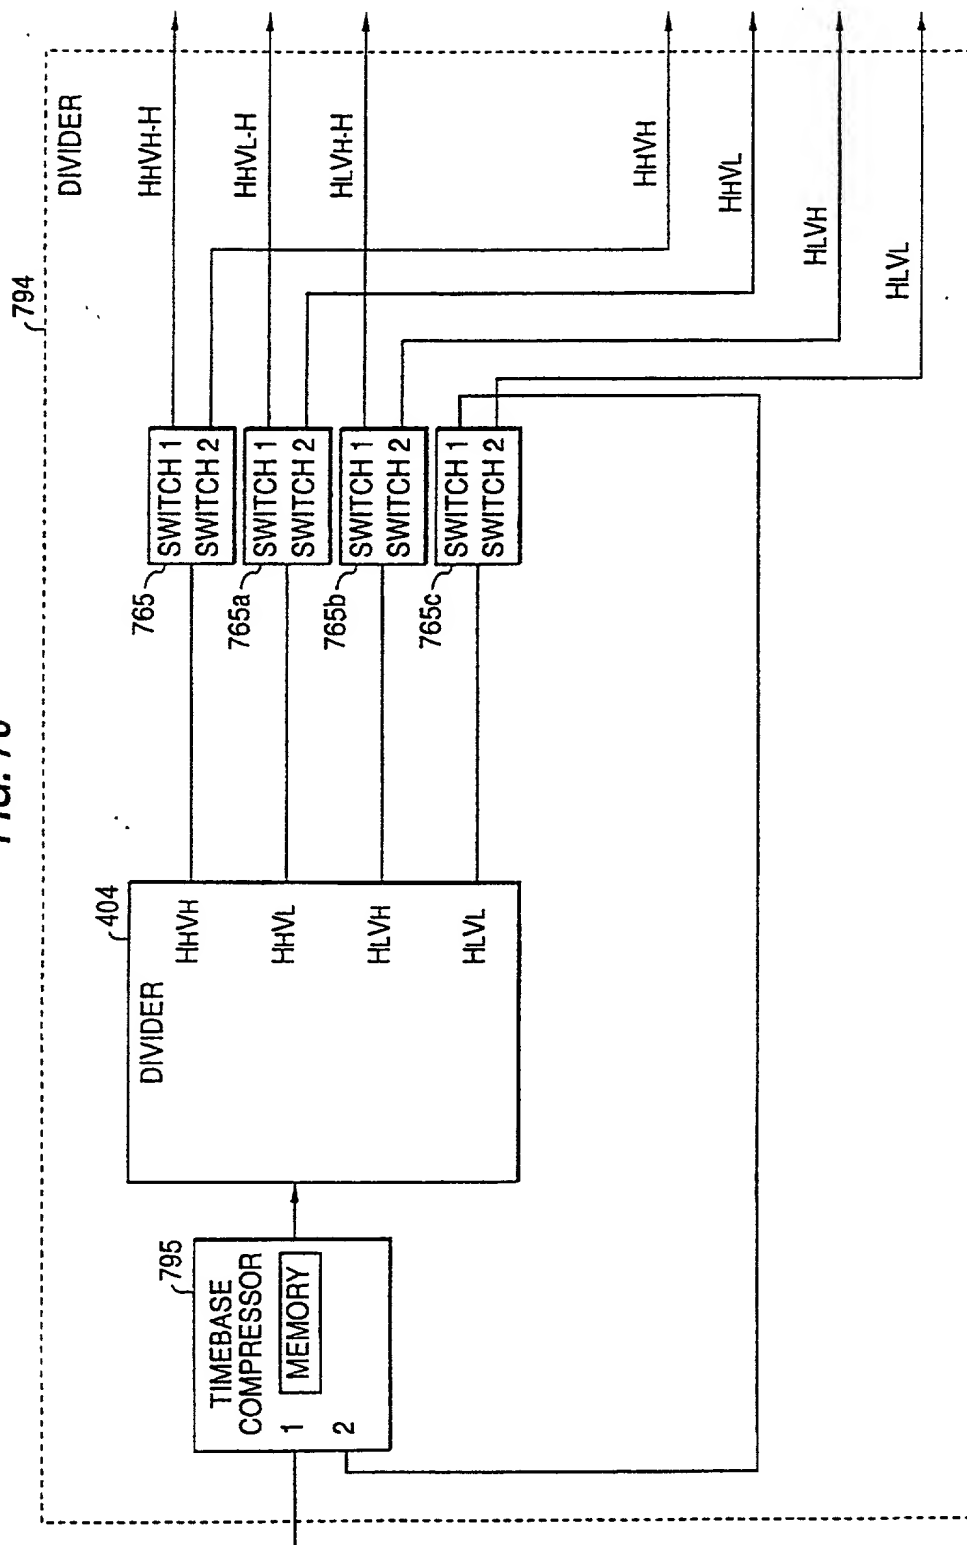


FIG. 71

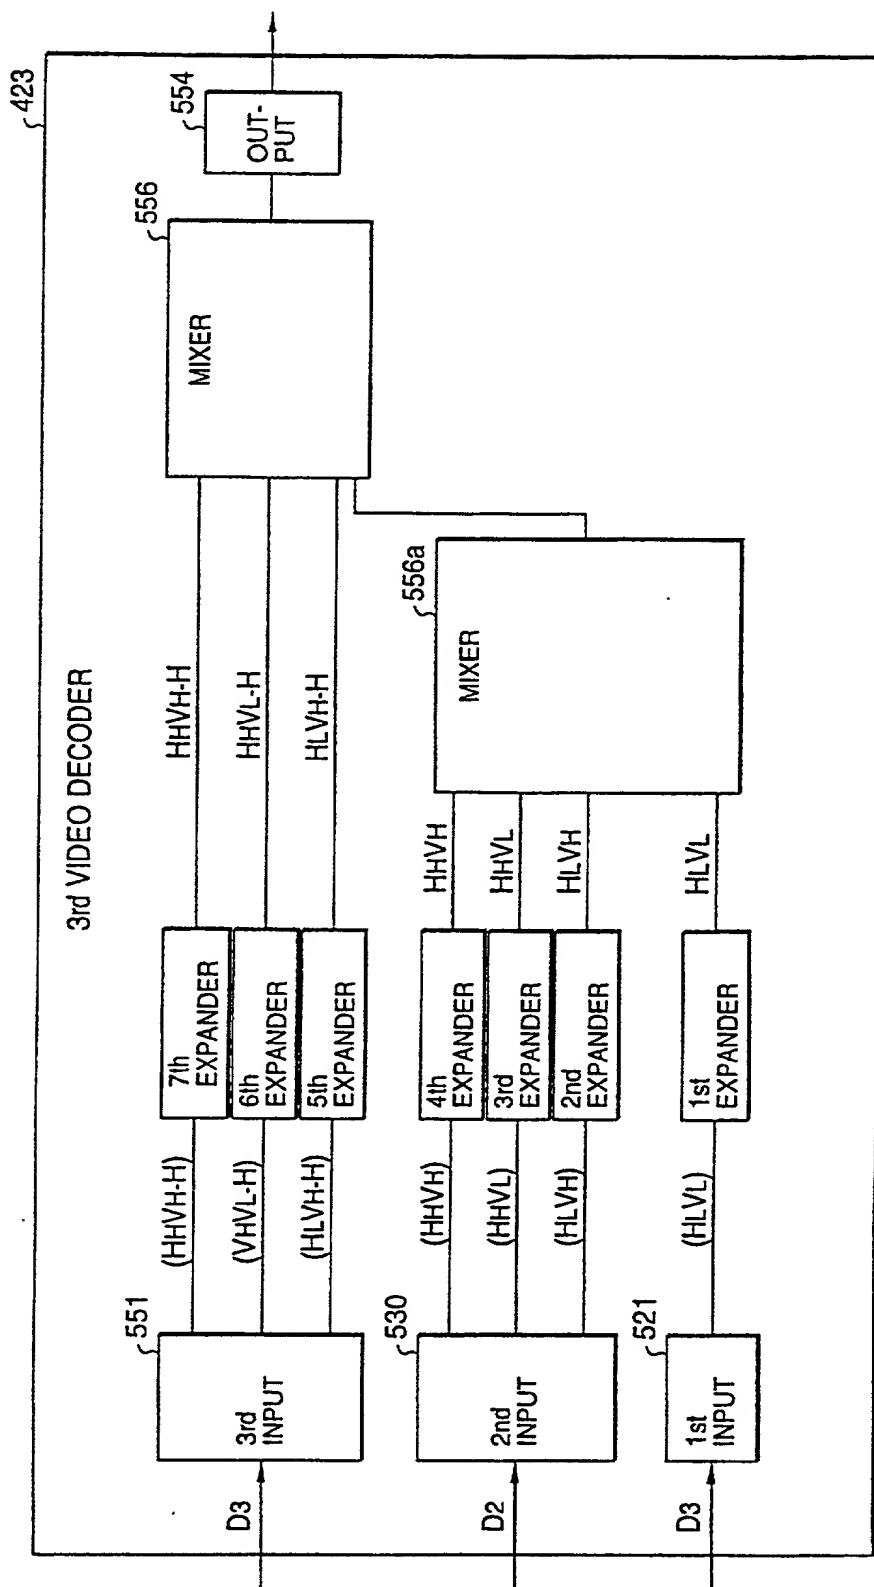


FIG. 72

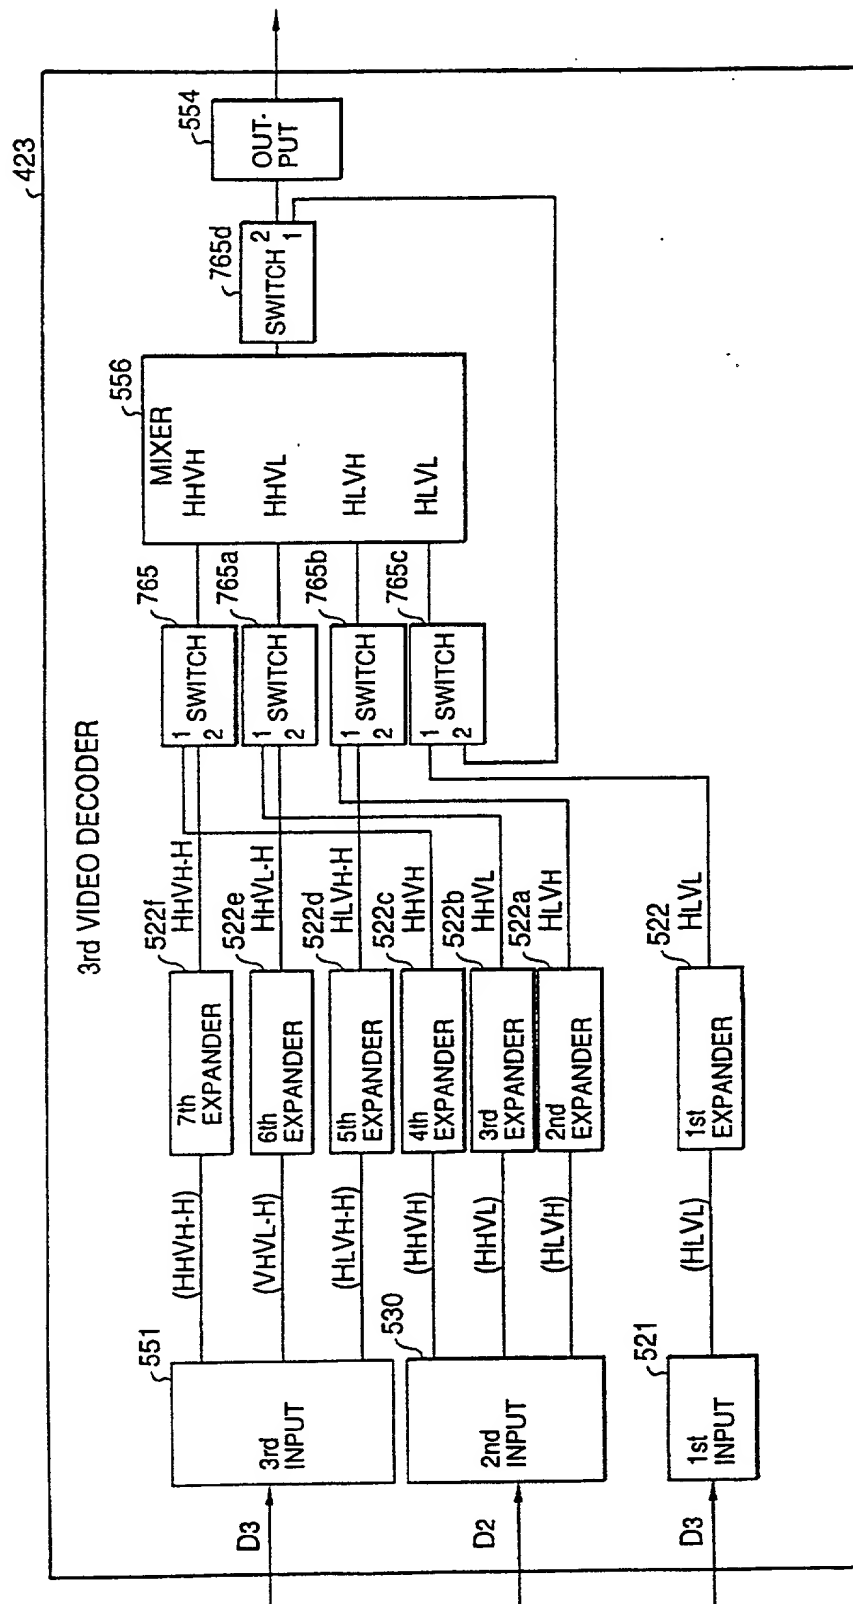


FIG. 73

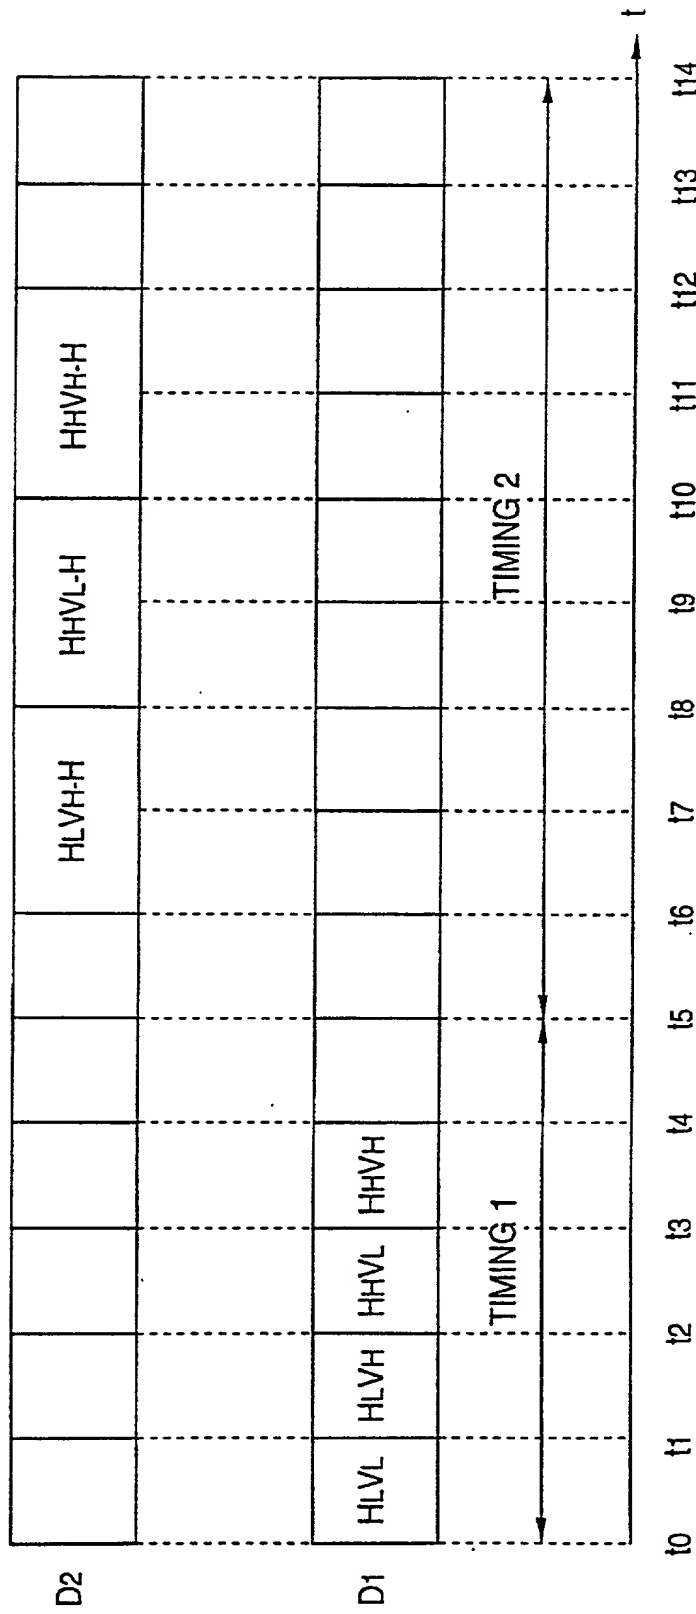


FIG. 74(a)

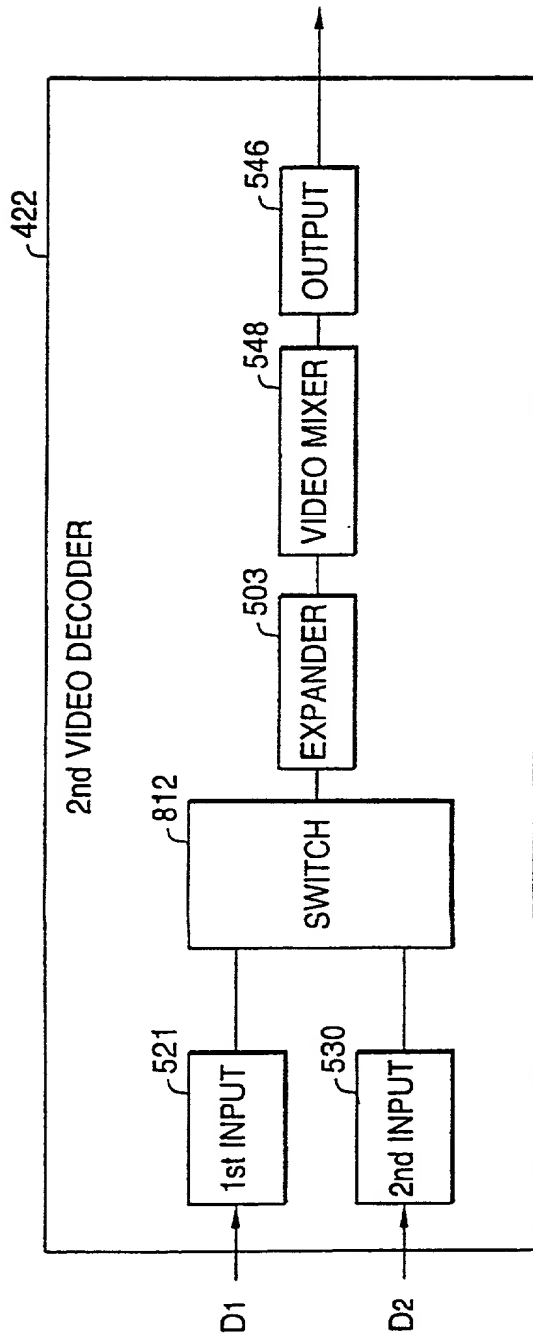


FIG. 74(b)

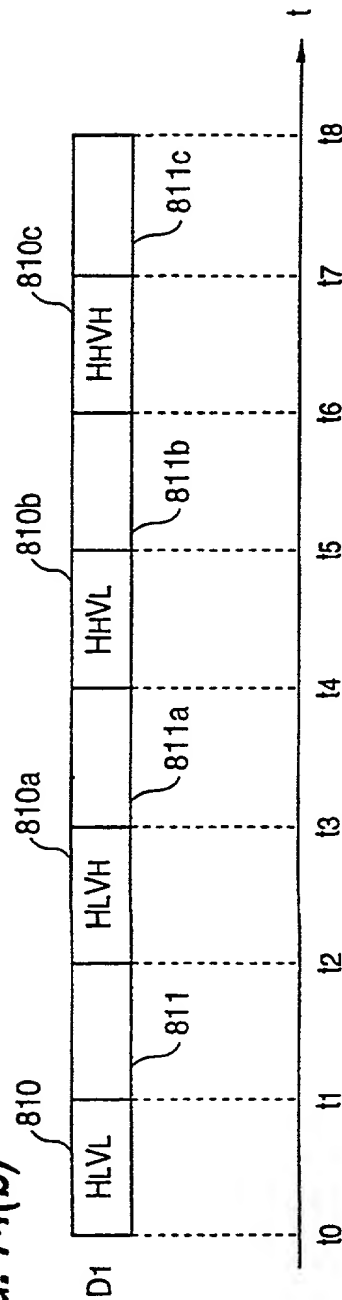


FIG. 75


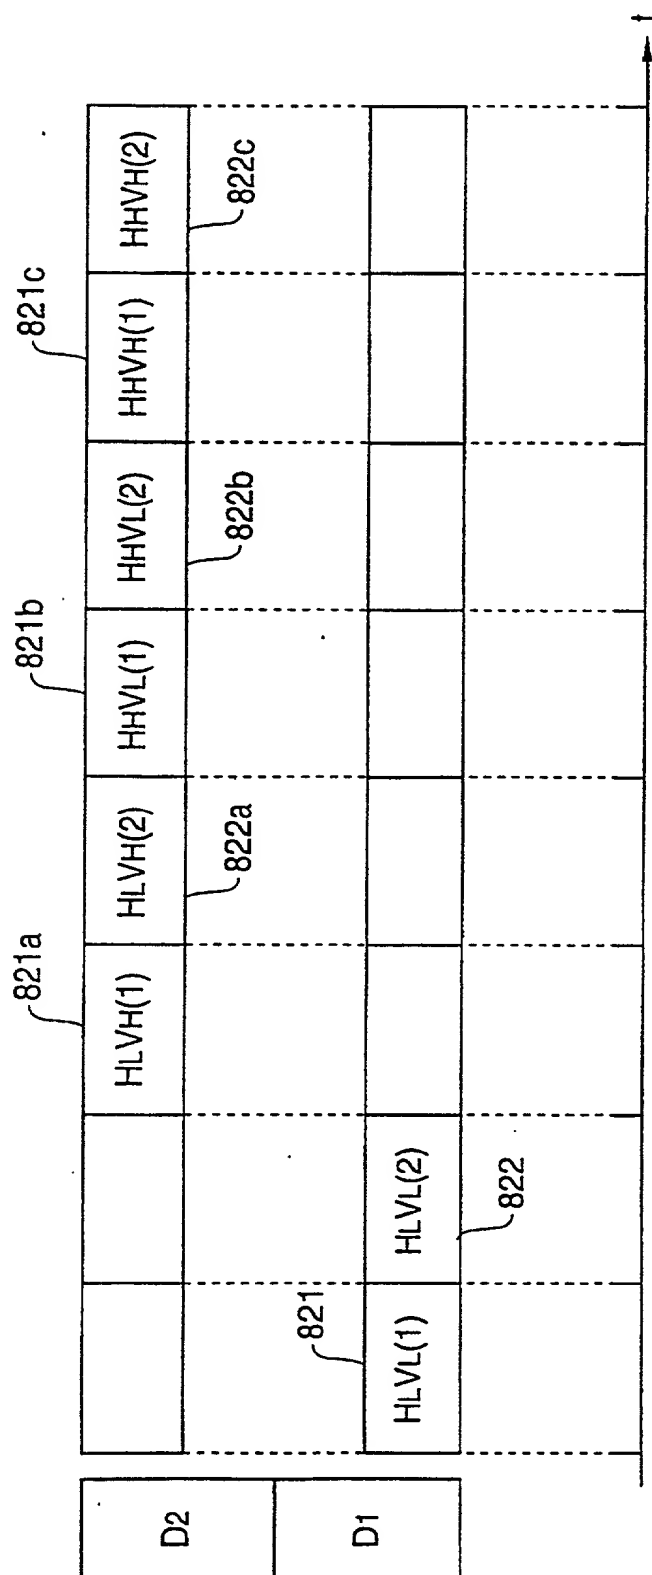


FIG. 76

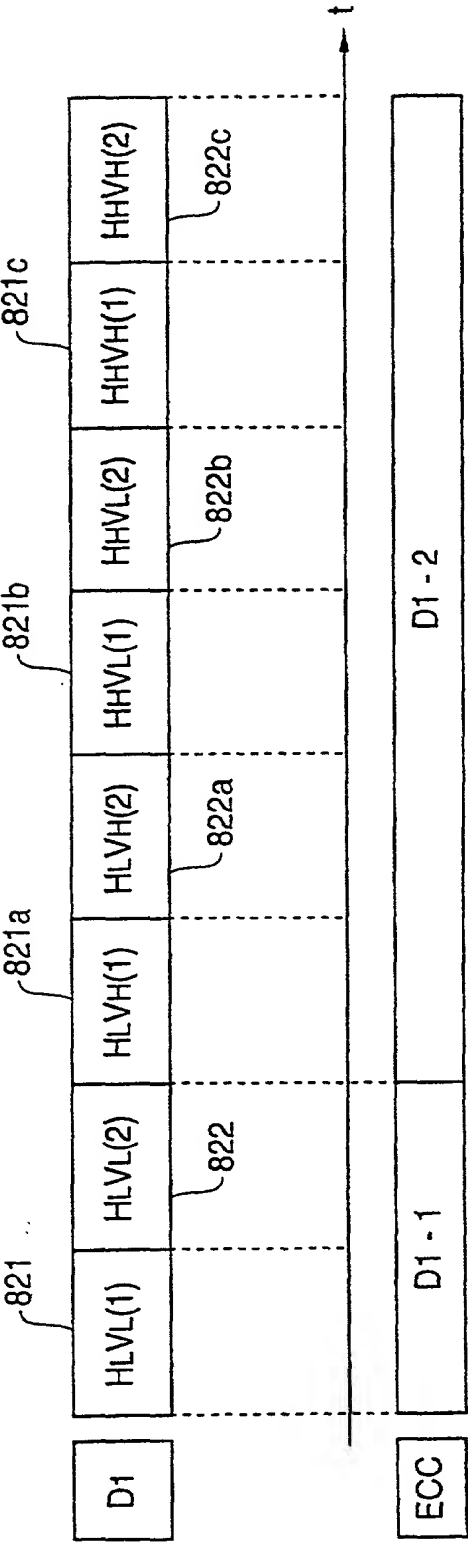

The diagram illustrates a timing sequence for a 16-bit data bus. The horizontal axis represents time, divided into 16 clock cycles (labeled 10 to 134). The vertical axis represents data lines, with two main data streams, D1 and D2, shown as horizontal bars. The data patterns for D1 and D2 are as follows:

Time	D1 Data	D2 Data
10	HLVL (1)	
12	HLVH (1)	
14	HLVL (1)	
16	HLVH (1)	
18	HLVH (2)	
20	HLVH (2)	
22	HLVH (2)	
24	HLVH (2)	
26	HLVH (2)	
28	HLVH (2)	
30	HLVH (2)	
32	HLVH (2)	
34	HLVH (2)	
36	HLVH (2)	
38	HLVH (2)	
40	HLVH (2)	
42	HLVH (2)	
44	HLVH (2)	
46	HLVH (2)	
48	HLVH (2)	
50	HLVH (2)	
52	HLVH (2)	
54	HLVH (2)	
56	HLVH (2)	
58	HLVH (2)	
60	HLVH (2)	
62	HLVH (2)	
64	HLVH (2)	
66	HLVH (2)	
68	HLVH (2)	
70	HLVH (2)	
72	HLVH (2)	
74	HLVH (2)	
76	HLVH (2)	
78	HLVH (2)	
80	HLVH (2)	
82	HLVH (2)	
84	HLVH (2)	
86	HLVH (2)	
88	HLVH (2)	
90	HLVH (2)	
92	HLVH (2)	
94	HLVH (2)	
96	HLVH (2)	
98	HLVH (2)	
100	HLVH (2)	
102	HLVH (2)	
104	HLVH (2)	
106	HLVH (2)	
108	HLVH (2)	
110	HLVH (2)	
112	HLVH (2)	
114	HLVH (2)	
116	HLVH (2)	
118	HLVH (2)	
120	HLVH (2)	
122	HLVH (2)	
124	HLVH (2)	
126	HLVH (2)	
128	HLVH (2)	
130	HLVH (2)	
132	HLVH (2)	
134	HLVH (2)	

Control signals and other annotations include:

- 821**: A signal that is active (high) from time 10 to 12, 14 to 16, 18 to 20, 22 to 24, 26 to 28, 30 to 32, 34 to 36, 38 to 40, 42 to 44, 46 to 48, 50 to 52, 54 to 56, 58 to 60, 62 to 64, 66 to 68, 70 to 72, 74 to 76, 78 to 80, 82 to 84, 86 to 88, 90 to 92, 94 to 96, 98 to 100, 102 to 104, 106 to 108, 110 to 112, 114 to 116, 118 to 120, 122 to 124, 126 to 128, 130 to 132, and 134.
- 822**: A signal that is active (high) from time 10 to 12, 14 to 16, 18 to 20, 22 to 24, 26 to 28, 30 to 32, 34 to 36, 38 to 40, 42 to 44, 46 to 48, 50 to 52, 54 to 56, 58 to 60, 62 to 64, 66 to 68, 70 to 72, 74 to 76, 78 to 80, 82 to 84, 86 to 88, 90 to 92, 94 to 96, 98 to 100, 102 to 104, 106 to 108, 110 to 112, 114 to 116, 118 to 120, 122 to 124, 126 to 128, 130 to 132, and 134.
- 823a**: A signal that is active (high) from time 10 to 12, 14 to 16, 18 to 20, 22 to 24, 26 to 28, 30 to 32, 34 to 36, 38 to 40, 42 to 44, 46 to 48, 50 to 52, 54 to 56, 58 to 60, 62 to 64, 66 to 68, 70 to 72, 74 to 76, 78 to 80, 82 to 84, 86 to 88, 90 to 92, 94 to 96, 98 to 100, 102 to 104, 106 to 108, 110 to 112, 114 to 116, 118 to 120, 122 to 124, 126 to 128, 130 to 132, and 134.
- 823b**: A signal that is active (high) from time 10 to 12, 14 to 16, 18 to 20, 22 to 24, 26 to 28, 30 to 32, 34 to 36, 38 to 40, 42 to 44, 46 to 48, 50 to 52, 54 to 56, 58 to 60, 62 to 64, 66 to 68, 70 to 72, 74 to 76, 78 to 80, 82 to 84, 86 to 88, 90 to 92, 94 to 96, 98 to 100, 102 to 104, 106 to 108, 110 to 112, 114 to 116, 118 to 120, 122 to 124, 126 to 128, 130 to 132, and 134.
- 824a**: A signal that is active (high) from time 10 to 12, 14 to 16, 18 to 20, 22 to 24, 26 to 28, 30 to 32, 34 to 36, 38 to 40, 42 to 44, 46 to 48, 50 to 52, 54 to 56, 58 to 60, 62 to 64, 66 to 68, 70 to 72, 74 to 76, 78 to 80, 82 to 84, 86 to 88, 90 to 92, 94 to 96, 98 to 100, 102 to 104, 106 to 108, 110 to 112, 114 to 116, 118 to 120, 122 to 124, 126 to 128, 130 to 132, and 134.
- 824b**: A signal that is active (high) from time 10 to 12, 14 to 16, 18 to 20, 22 to 24, 26 to 28, 30 to 32, 34 to 36, 38 to 40, 42 to 44, 46 to 48, 50 to 52, 54 to 56, 58 to 60, 62 to 64, 66 to 68, 70 to 72, 74 to 76, 78 to 80, 82 to 84, 86 to 88, 90 to 92, 94 to 96, 98 to 100, 102 to 104, 106 to 108, 110 to 112, 114 to 116, 118 to 120, 122 to 124, 126 to 128, 130 to 132, and 134.

1. <i>Species</i>	
1.1. <i>Species 1</i>	1.1.1. <i>Species 1.1</i>
1.2. <i>Species 2</i>	1.2.1. <i>Species 2.1</i>
1.3. <i>Species 3</i>	1.3.1. <i>Species 3.1</i>
1.4. <i>Species 4</i>	1.4.1. <i>Species 4.1</i>
1.5. <i>Species 5</i>	1.5.1. <i>Species 5.1</i>
1.6. <i>Species 6</i>	1.6.1. <i>Species 6.1</i>
1.7. <i>Species 7</i>	1.7.1. <i>Species 7.1</i>
1.8. <i>Species 8</i>	1.8.1. <i>Species 8.1</i>
1.9. <i>Species 9</i>	1.9.1. <i>Species 9.1</i>
1.10. <i>Species 10</i>	1.10.1. <i>Species 10.1</i>
1.11. <i>Species 11</i>	1.11.1. <i>Species 11.1</i>
1.12. <i>Species 12</i>	1.12.1. <i>Species 12.1</i>
1.13. <i>Species 13</i>	1.13.1. <i>Species 13.1</i>
1.14. <i>Species 14</i>	1.14.1. <i>Species 14.1</i>
1.15. <i>Species 15</i>	1.15.1. <i>Species 15.1</i>
1.16. <i>Species 16</i>	1.16.1. <i>Species 16.1</i>
1.17. <i>Species 17</i>	1.17.1. <i>Species 17.1</i>
1.18. <i>Species 18</i>	1.18.1. <i>Species 18.1</i>
1.19. <i>Species 19</i>	1.19.1. <i>Species 19.1</i>
1.20. <i>Species 20</i>	1.20.1. <i>Species 20.1</i>
1.21. <i>Species 21</i>	1.21.1. <i>Species 21.1</i>
1.22. <i>Species 22</i>	1.22.1. <i>Species 22.1</i>
1.23. <i>Species 23</i>	1.23.1. <i>Species 23.1</i>
1.24. <i>Species 24</i>	1.24.1. <i>Species 24.1</i>
1.25. <i>Species 25</i>	1.25.1. <i>Species 25.1</i>
1.26. <i>Species 26</i>	1.26.1. <i>Species 26.1</i>
1.27. <i>Species 27</i>	1.27.1. <i>Species 27.1</i>
1.28. <i>Species 28</i>	1.28.1. <i>Species 28.1</i>
1.29. <i>Species 29</i>	1.29.1. <i>Species 29.1</i>
1.30. <i>Species 30</i>	1.30.1. <i>Species 30.1</i>
1.31. <i>Species 31</i>	1.31.1. <i>Species 31.1</i>
1.32. <i>Species 32</i>	1.32.1. <i>Species 32.1</i>
1.33. <i>Species 33</i>	1.33.1. <i>Species 33.1</i>
1.34. <i>Species 34</i>	1.34.1. <i>Species 34.1</i>
1.35. <i>Species 35</i>	1.35.1. <i>Species 35.1</i>
1.36. <i>Species 36</i>	1.36.1. <i>Species 36.1</i>
1.37. <i>Species 37</i>	1.37.1. <i>Species 37.1</i>
1.38. <i>Species 38</i>	1.38.1. <i>Species 38.1</i>
1.39. <i>Species 39</i>	1.39.1. <i>Species 39.1</i>
1.40. <i>Species 40</i>	1.40.1. <i>Species 40.1</i>
1.41. <i>Species 41</i>	1.41.1. <i>Species 41.1</i>
1.42. <i>Species 42</i>	1.42.1. <i>Species 42.1</i>
1.43. <i>Species 43</i>	1.43.1. <i>Species 43.1</i>
1.44. <i>Species 44</i>	1.44.1. <i>Species 44.1</i>
1.45. <i>Species 45</i>	1.45.1. <i>Species 45.1</i>
1.46. <i>Species 46</i>	1.46.1. <i>Species 46.1</i>
1.47. <i>Species 47</i>	1.47.1. <i>Species 47.1</i>
1.48. <i>Species 48</i>	1.48.1. <i>Species 48.1</i>
1.49. <i>Species 49</i>	1.49.1. <i>Species 49.1</i>
1.50. <i>Species 50</i>	1.50.1. <i>Species 50.1</i>
1.51. <i>Species 51</i>	1.51.1. <i>Species 51.1</i>
1.52. <i>Species 52</i>	1.52.1. <i>Species 52.1</i>
1.53. <i>Species 53</i>	1.53.1. <i>Species 53.1</i>
1.54. <i>Species 54</i>	1.54.1. <i>Species 54.1</i>
1.55. <i>Species 55</i>	1.55.1. <i>Species 55.1</i>
1.56. <i>Species 56</i>	1.56.1. <i>Species 56.1</i>
1.57. <i>Species 57</i>	1.57.1. <i>Species 57.1</i>
1.58. <i>Species 58</i>	1.58.1. <i>Species 58.1</i>
1.59. <i>Species 59</i>	1.59.1. <i>Species 59.1</i>
1.60. <i>Species 60</i>	1.60.1. <i>Species 60.1</i>
1.61. <i>Species 61</i>	1.61.1. <i>Species 61.1</i>
1.62. <i>Species 62</i>	1.62.1. <i>Species 62.1</i>
1.63. <i>Species 63</i>	1.63.1. <i>Species 63.1</i>
1.64. <i>Species 64</i>	1.64.1. <i>Species 64.1</i>
1.65. <i>Species 65</i>	1.65.1. <i>Species 65.1</i>
1.66. <i>Species 66</i>	1.66.1. <i>Species 66.1</i>
1.67. <i>Species 67</i>	1.67.1. <i>Species 67.1</i>
1.68. <i>Species 68</i>	1.68.1. <i>Species 68.1</i>
1.69. <i>Species 69</i>	1.69.1. <i>Species 69.1</i>
1.70. <i>Species 70</i>	1.70.1. <i>Species 70.1</i>
1.71. <i>Species 71</i>	1.71.1. <i>Species 71.1</i>
1.72. <i>Species 72</i>	1.72.1. <i>Species 72.1</i>
1.73. <i>Species 73</i>	1.73.1. <i>Species 73.1</i>
1.74. <i>Species 74</i>	1.74.1. <i>Species 74.1</i>
1.75. <i>Species 75</i>	1.75.1. <i>Species 75.1</i>
1.76. <i>Species 76</i>	1.76.1. <i>Species 76.1</i>
1.77. <i>Species 77</i>	1.77.1. <i>Species 77.1</i>
1.78. <i>Species 78</i>	1.78.1. <i>Species 78.1</i>
1.79. <i>Species 79</i>	1.79.1. <i>Species 79.1</i>
1.80. <i>Species 80</i>	1.80.1. <i>Species 80.1</i>
1.81.	

FIG. 78

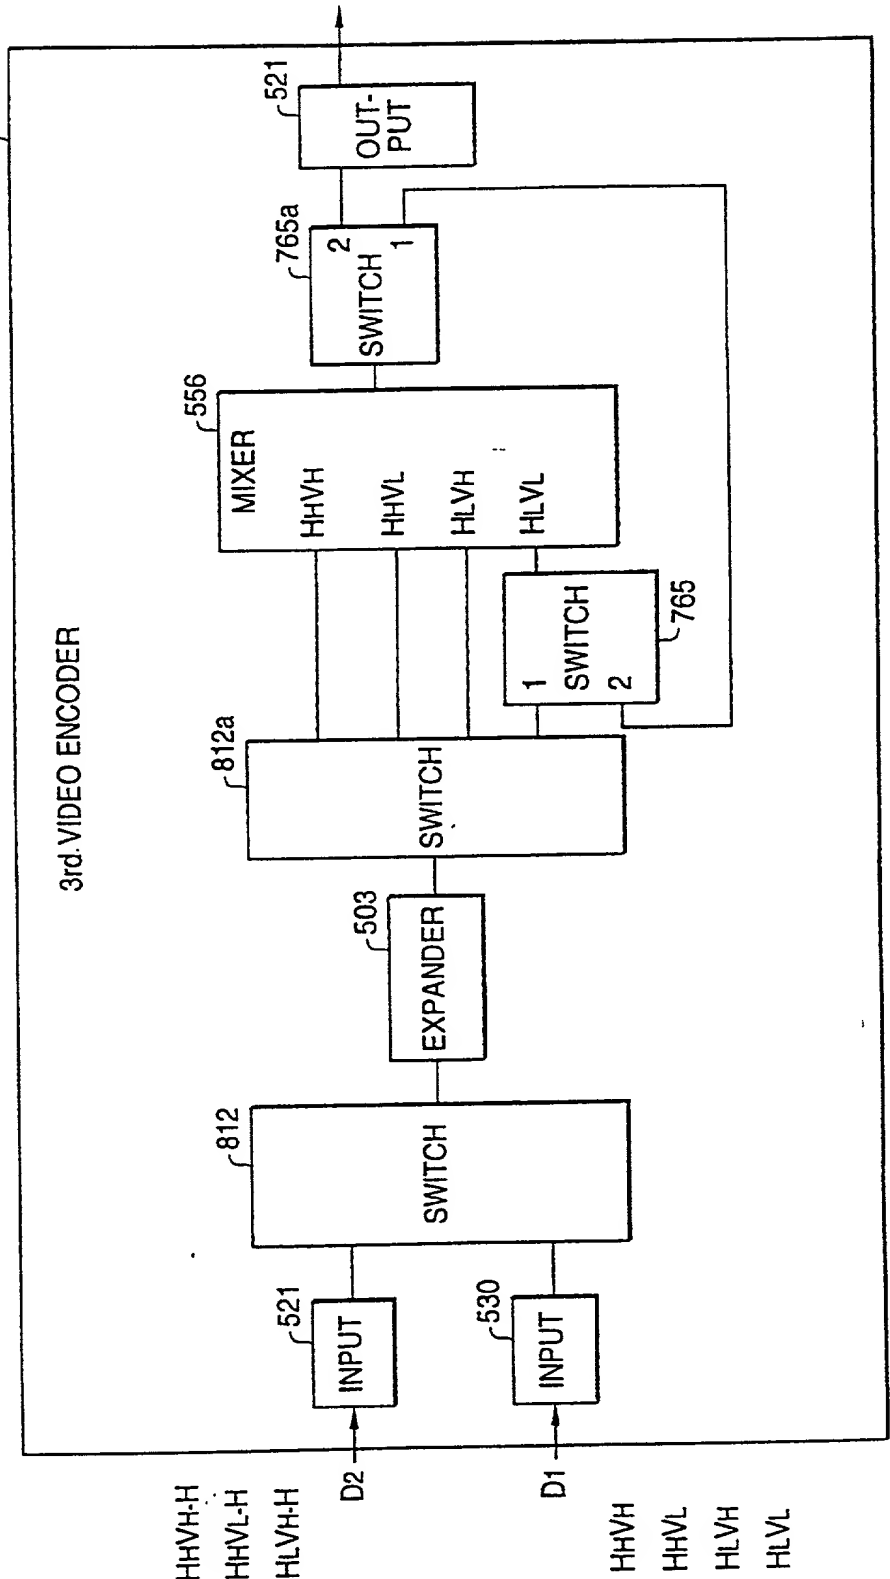


FIG. 79

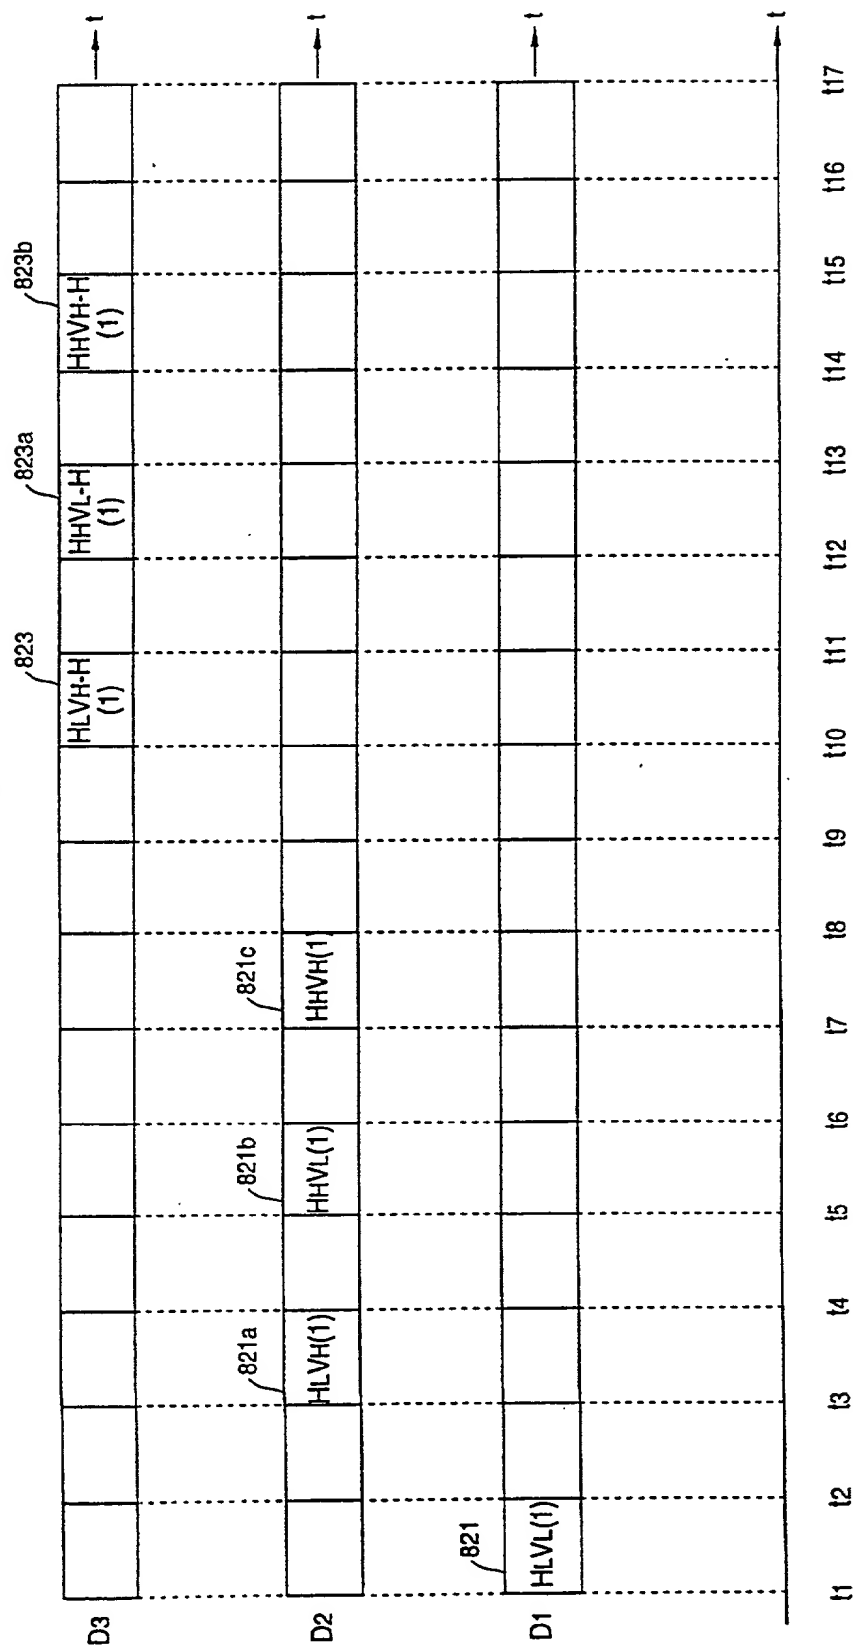


FIG. 80

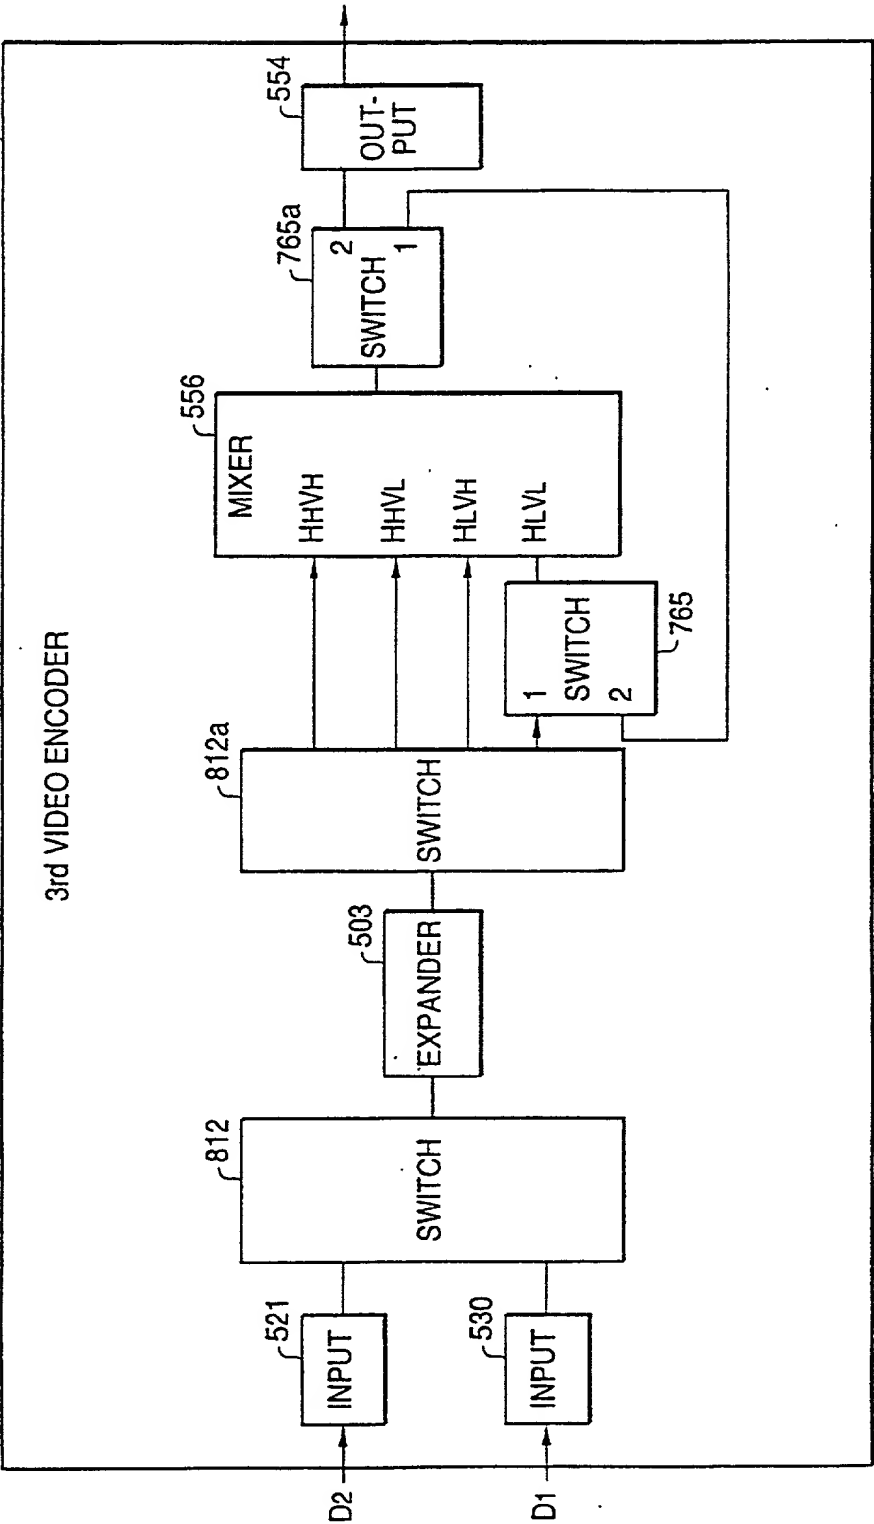


FIG. 81

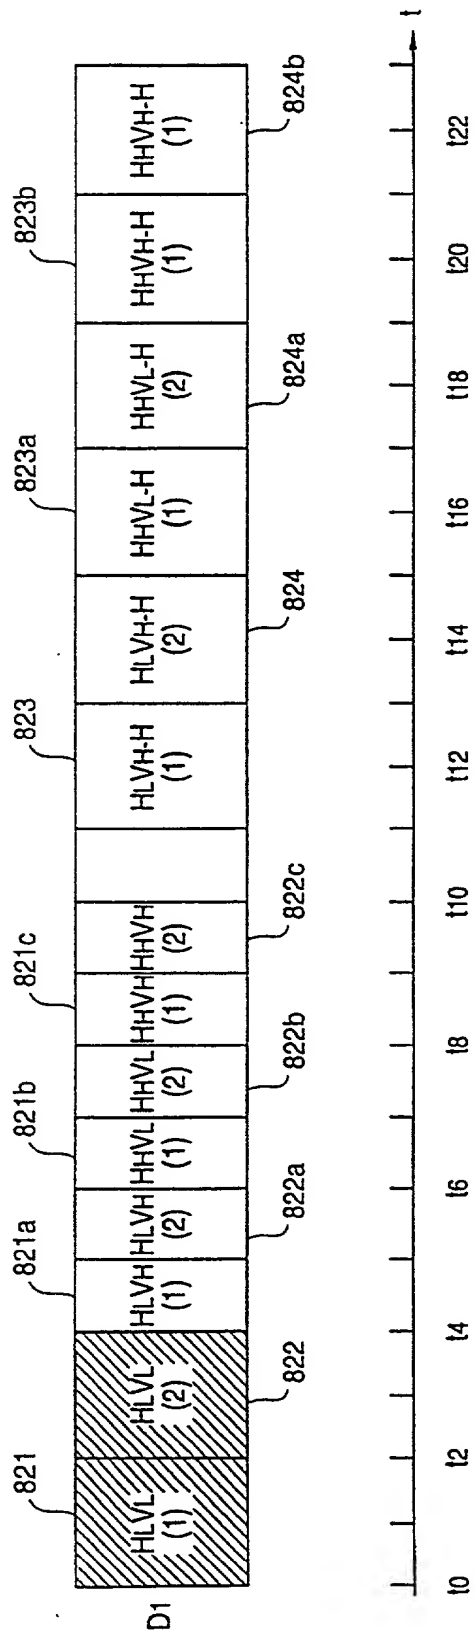


FIG. 82

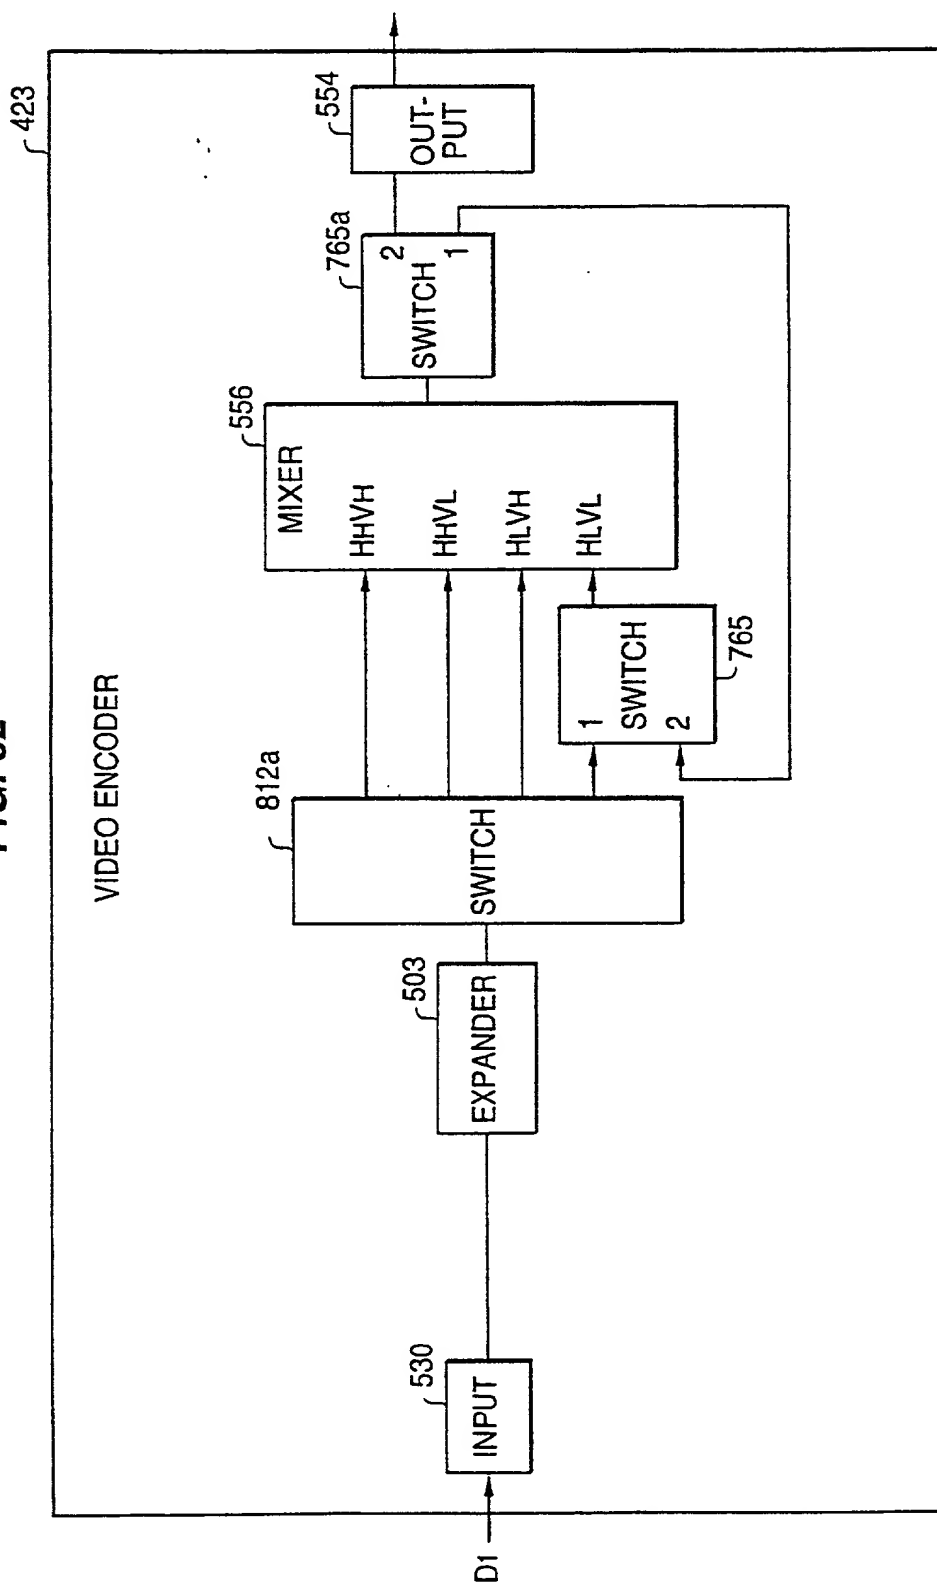


FIG. 83

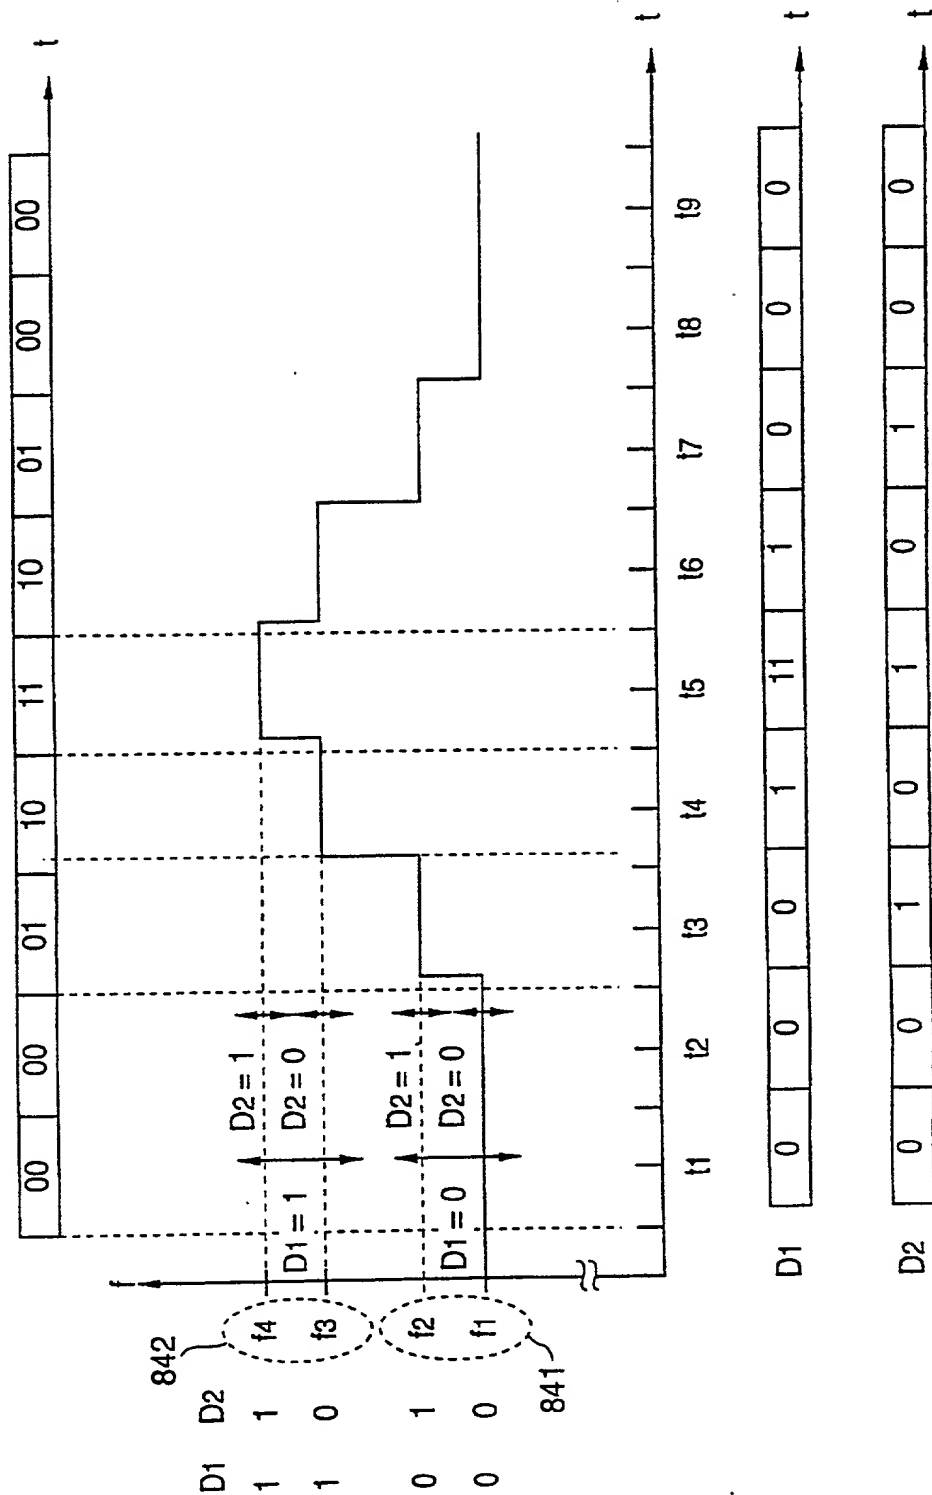


FIG. 84

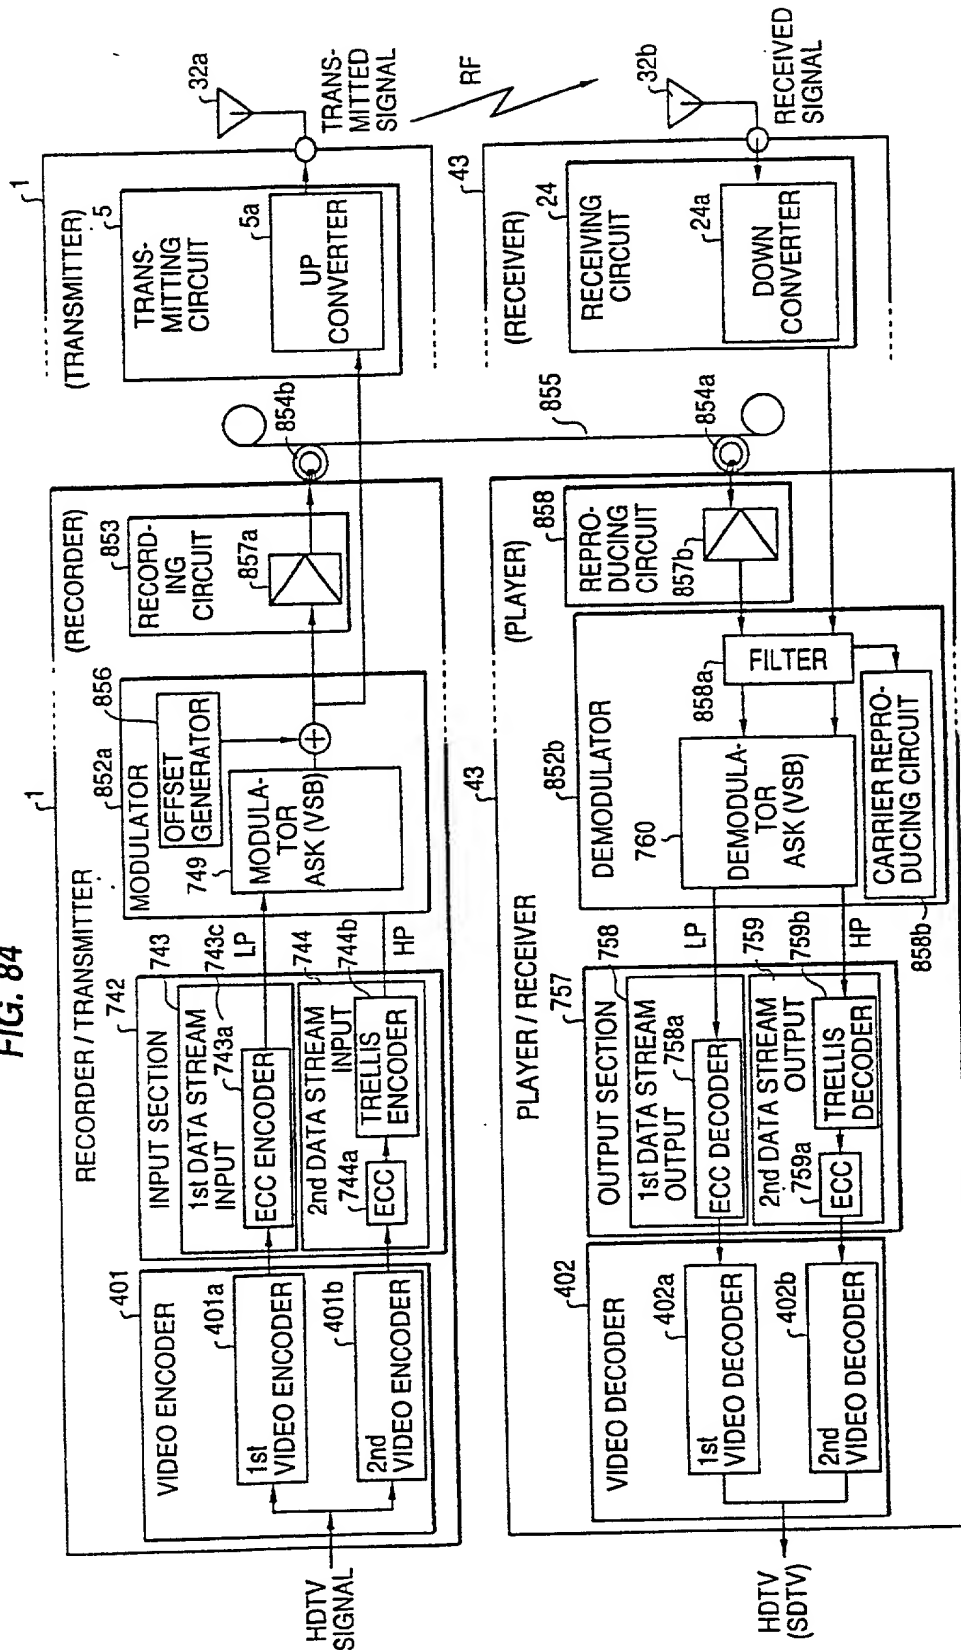


FIG. 85

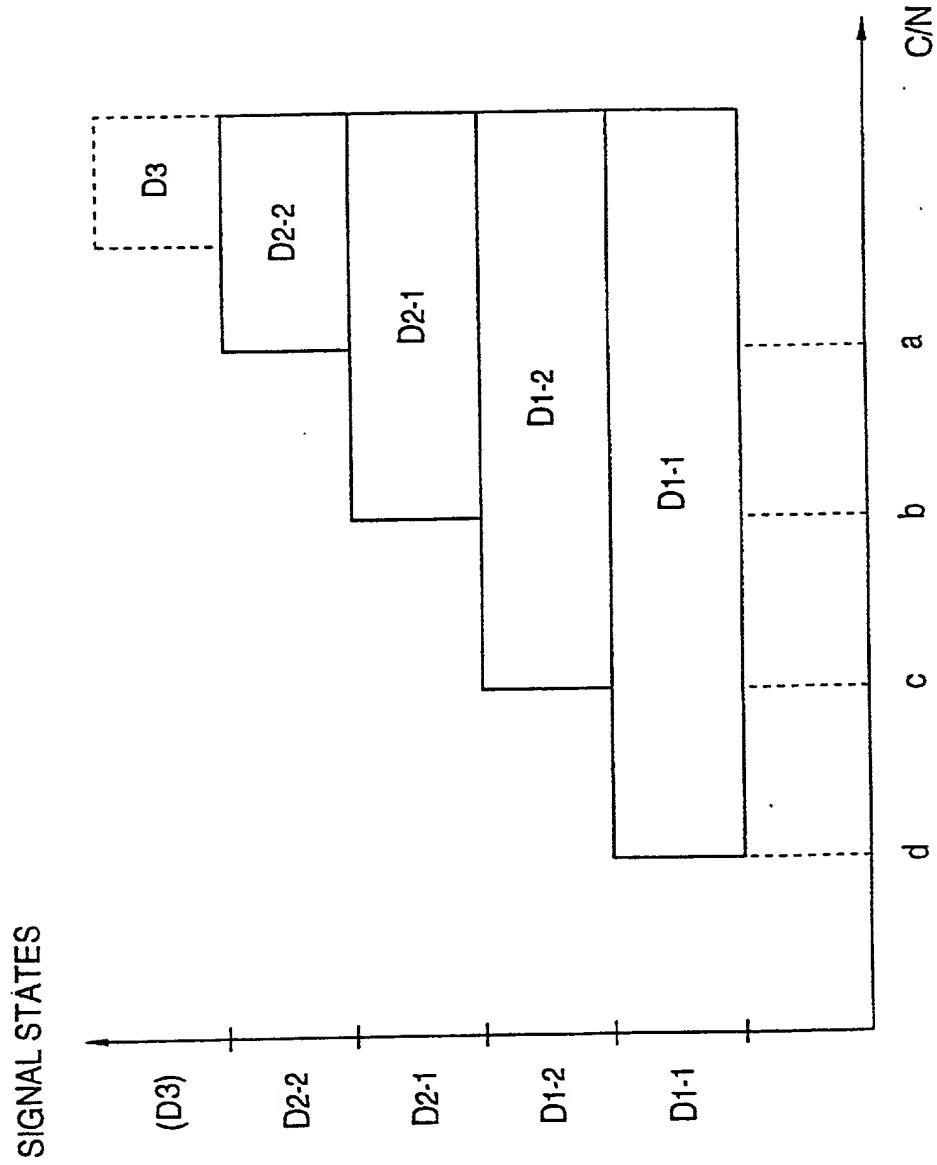


FIG. 86

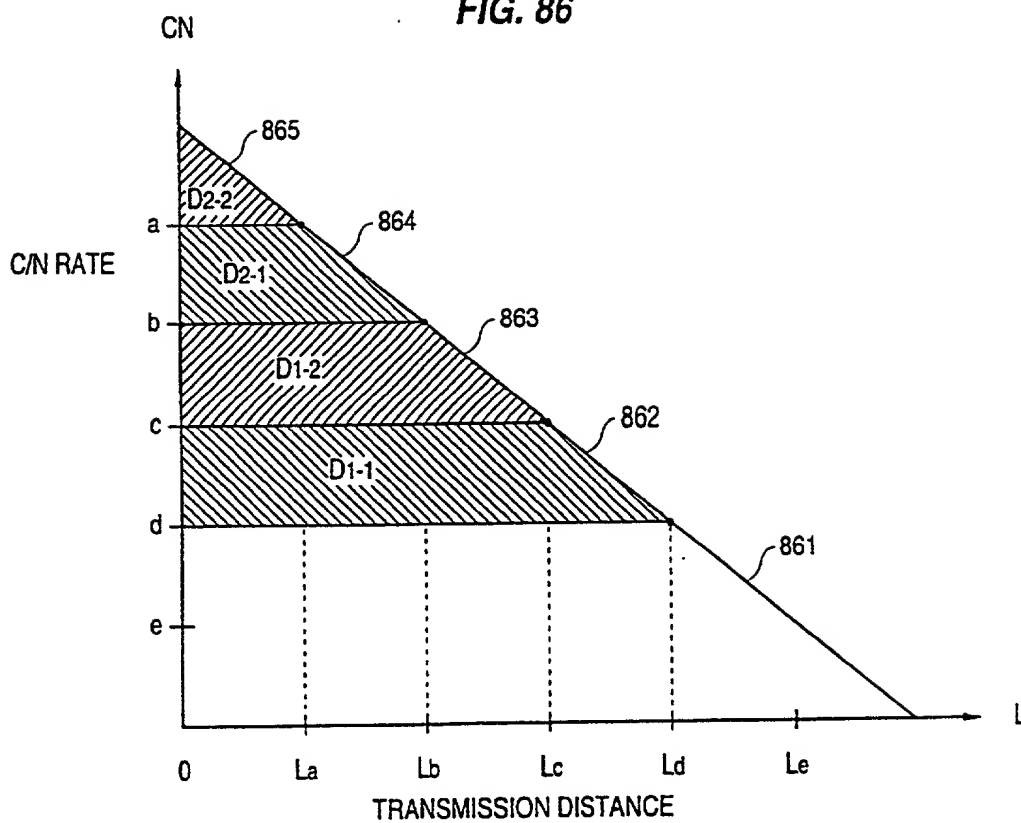


FIG. 87

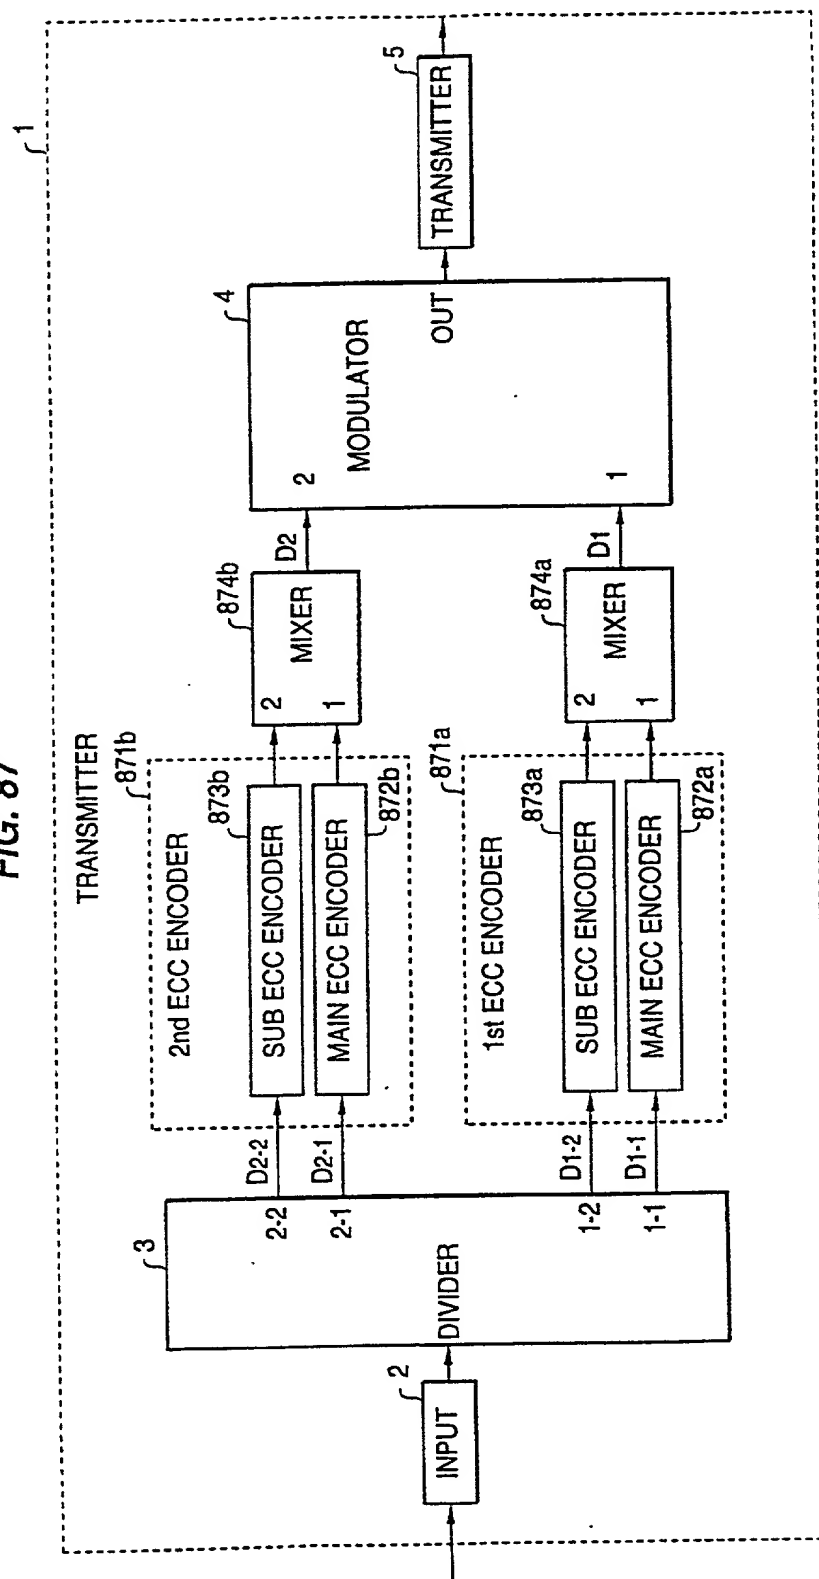


FIG. 88

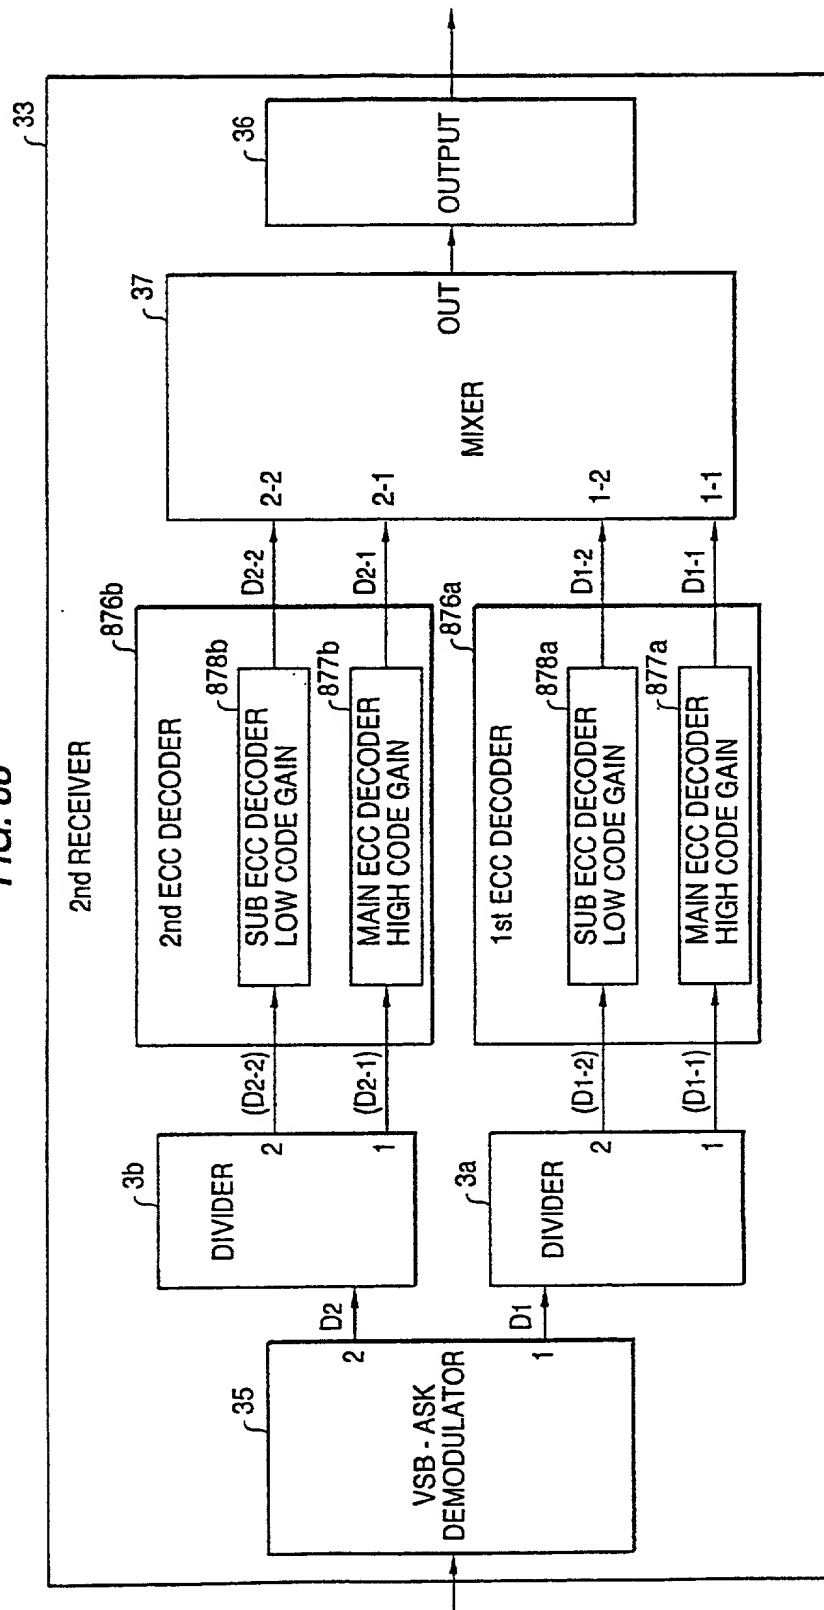


FIG. 89


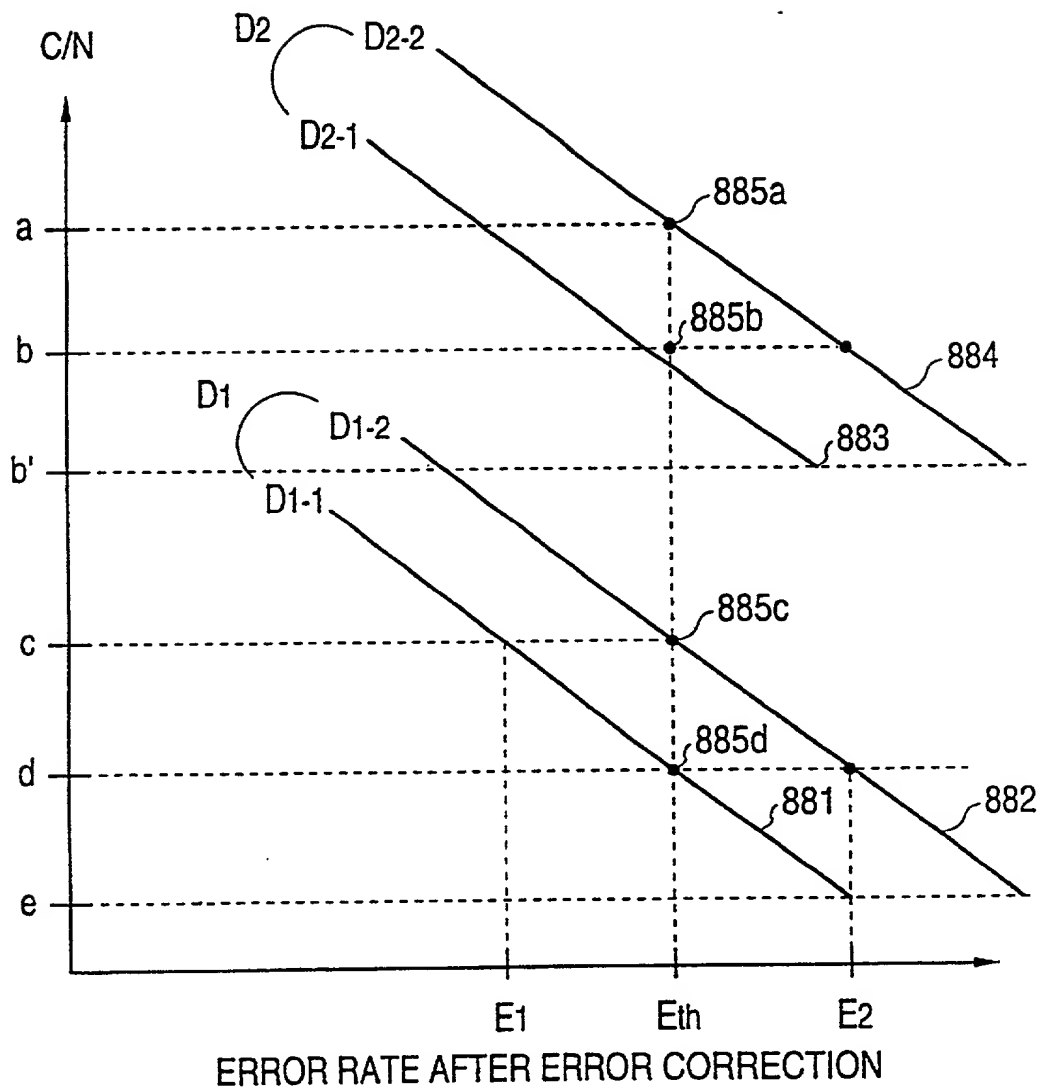


FIG. 90

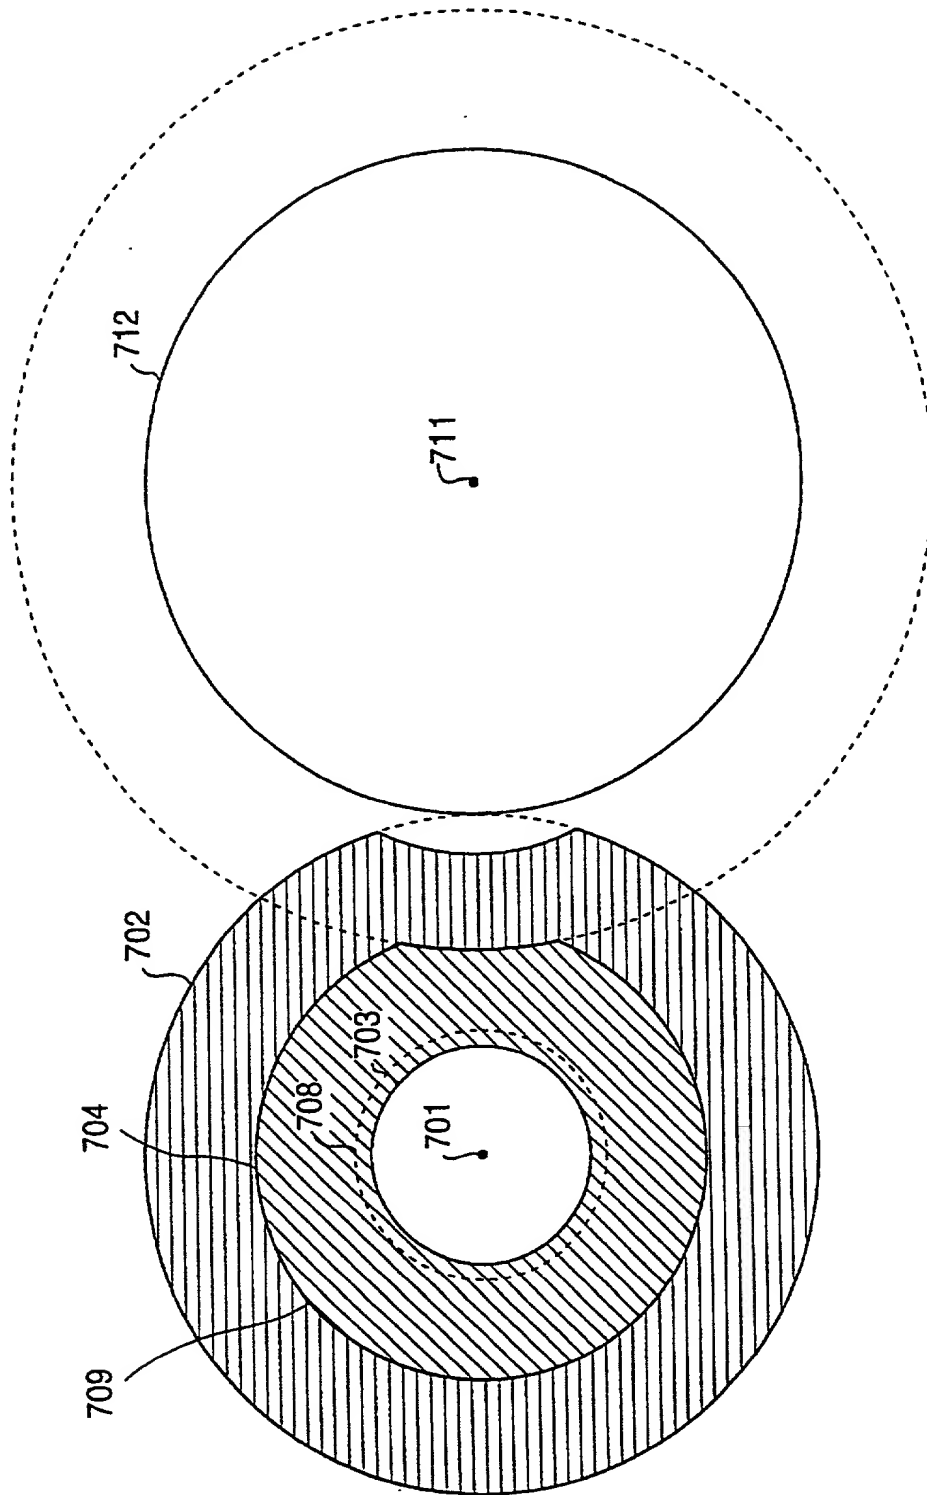

006260" 94622960

FIG. 91

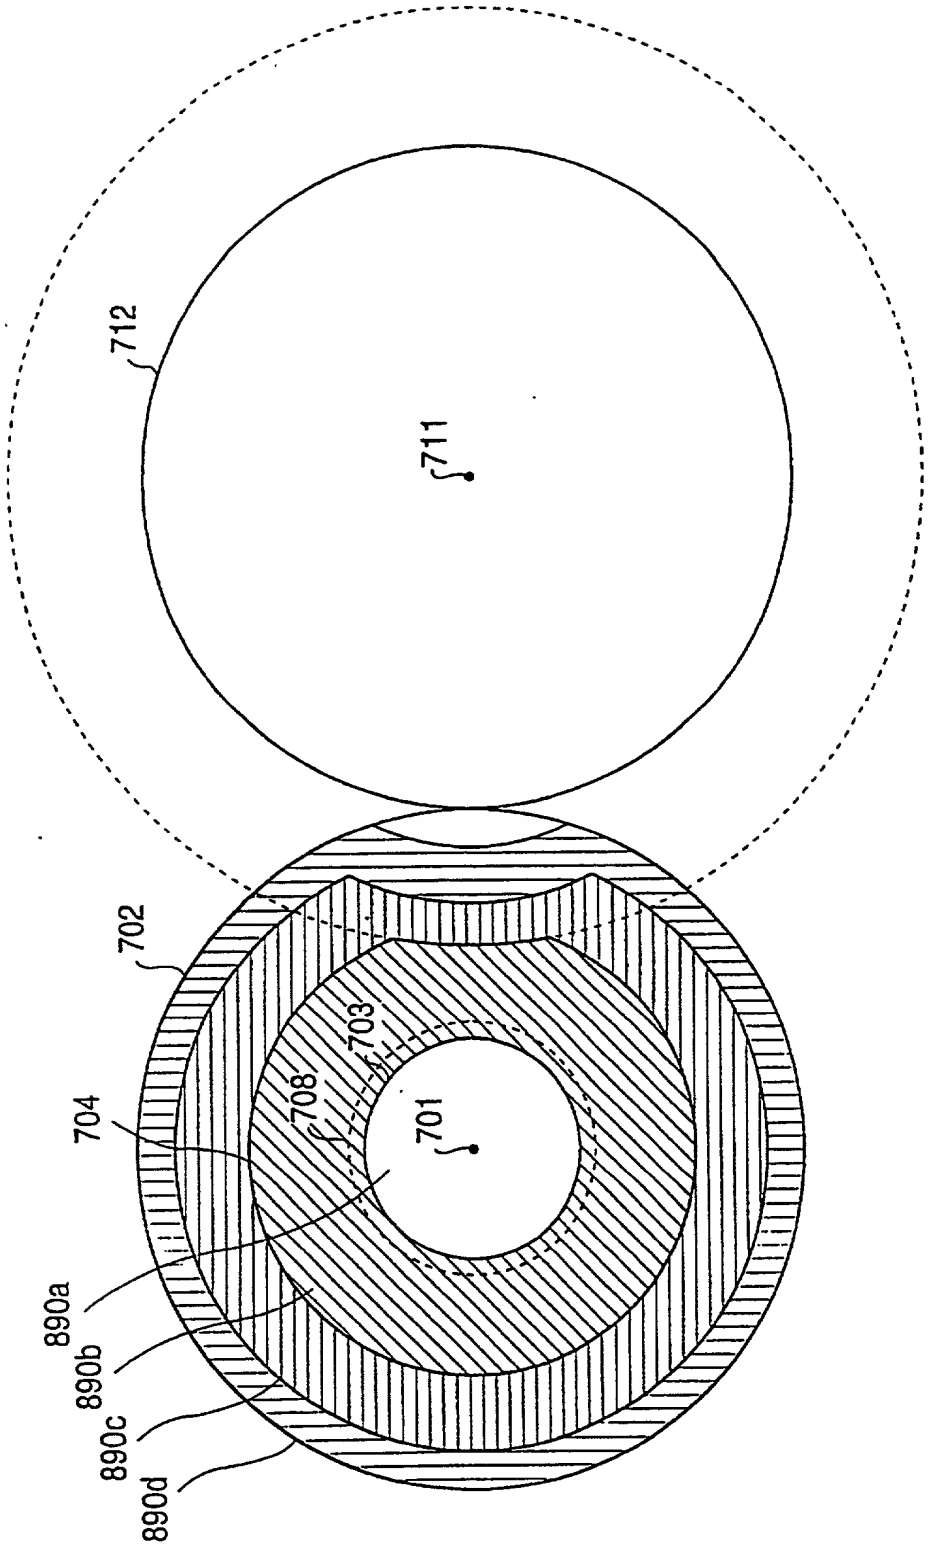


FIG. 92

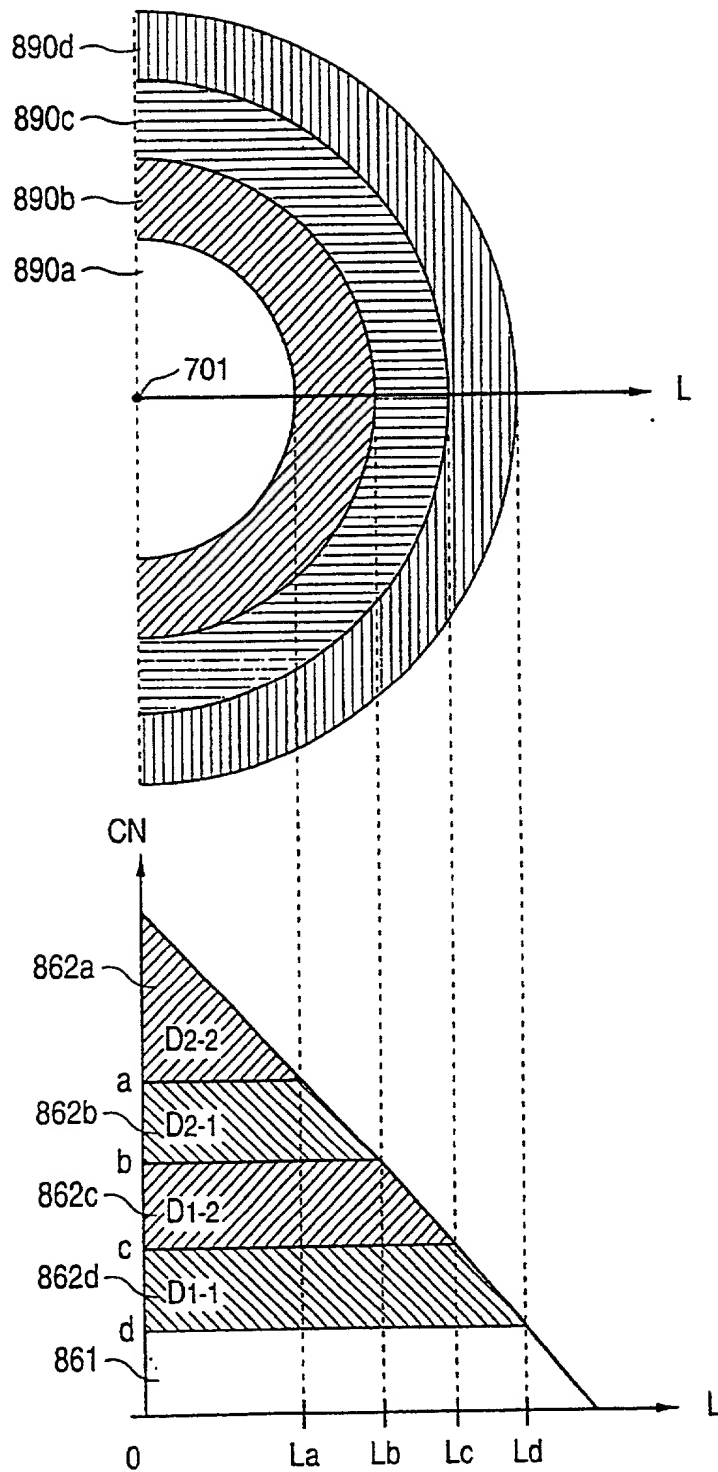


FIG. 93

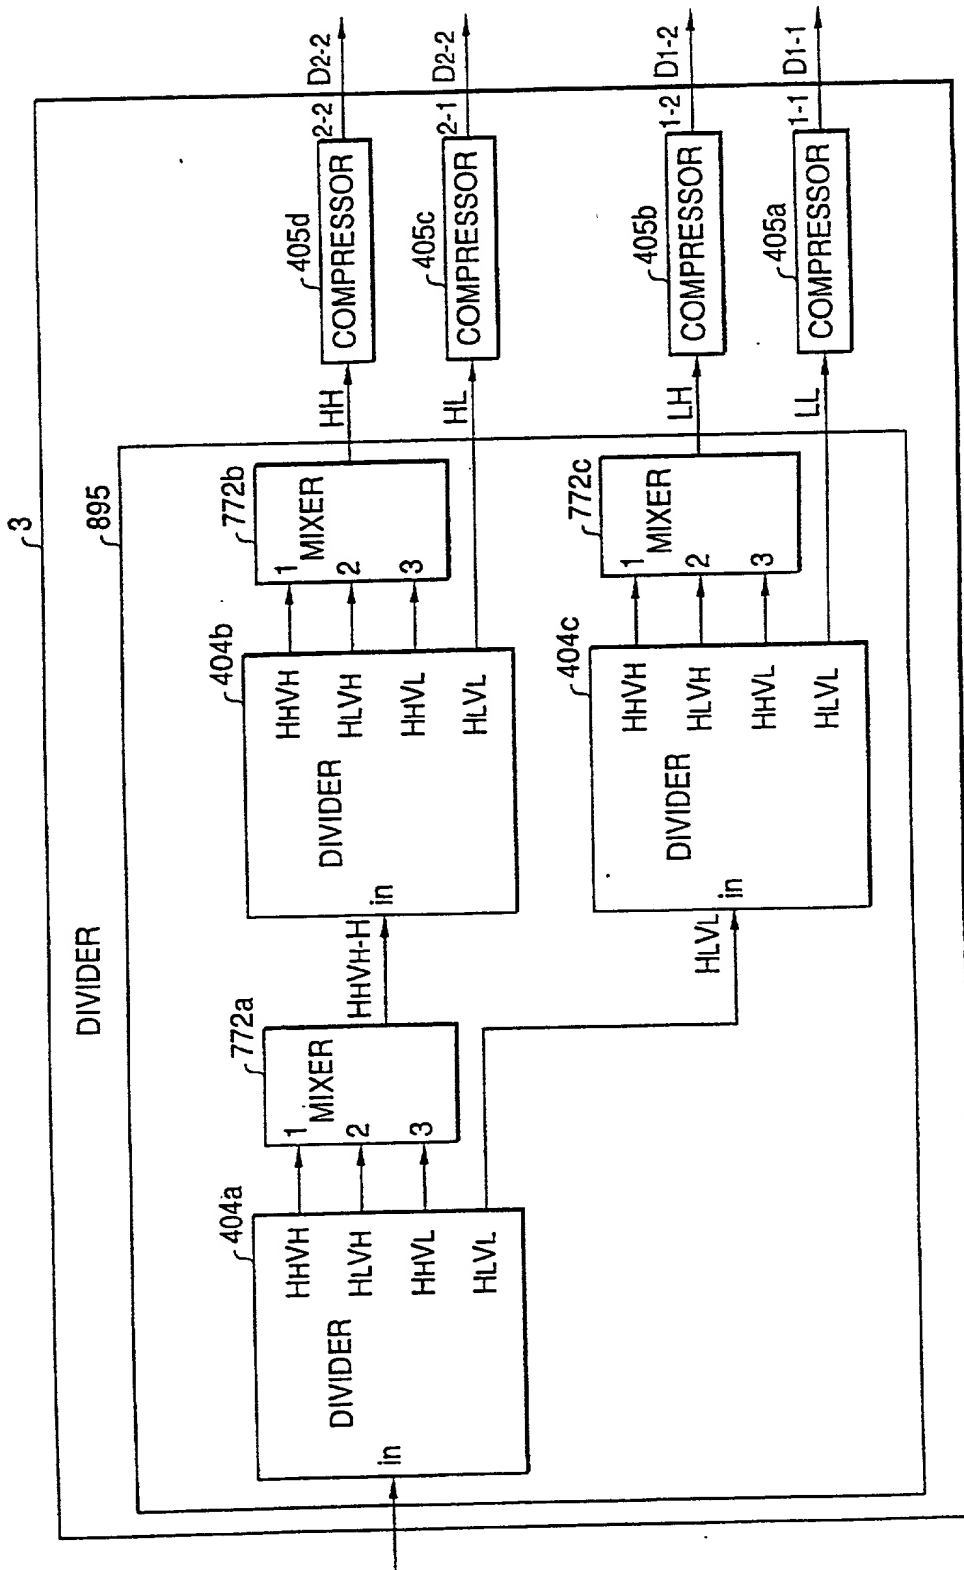


FIG. 94

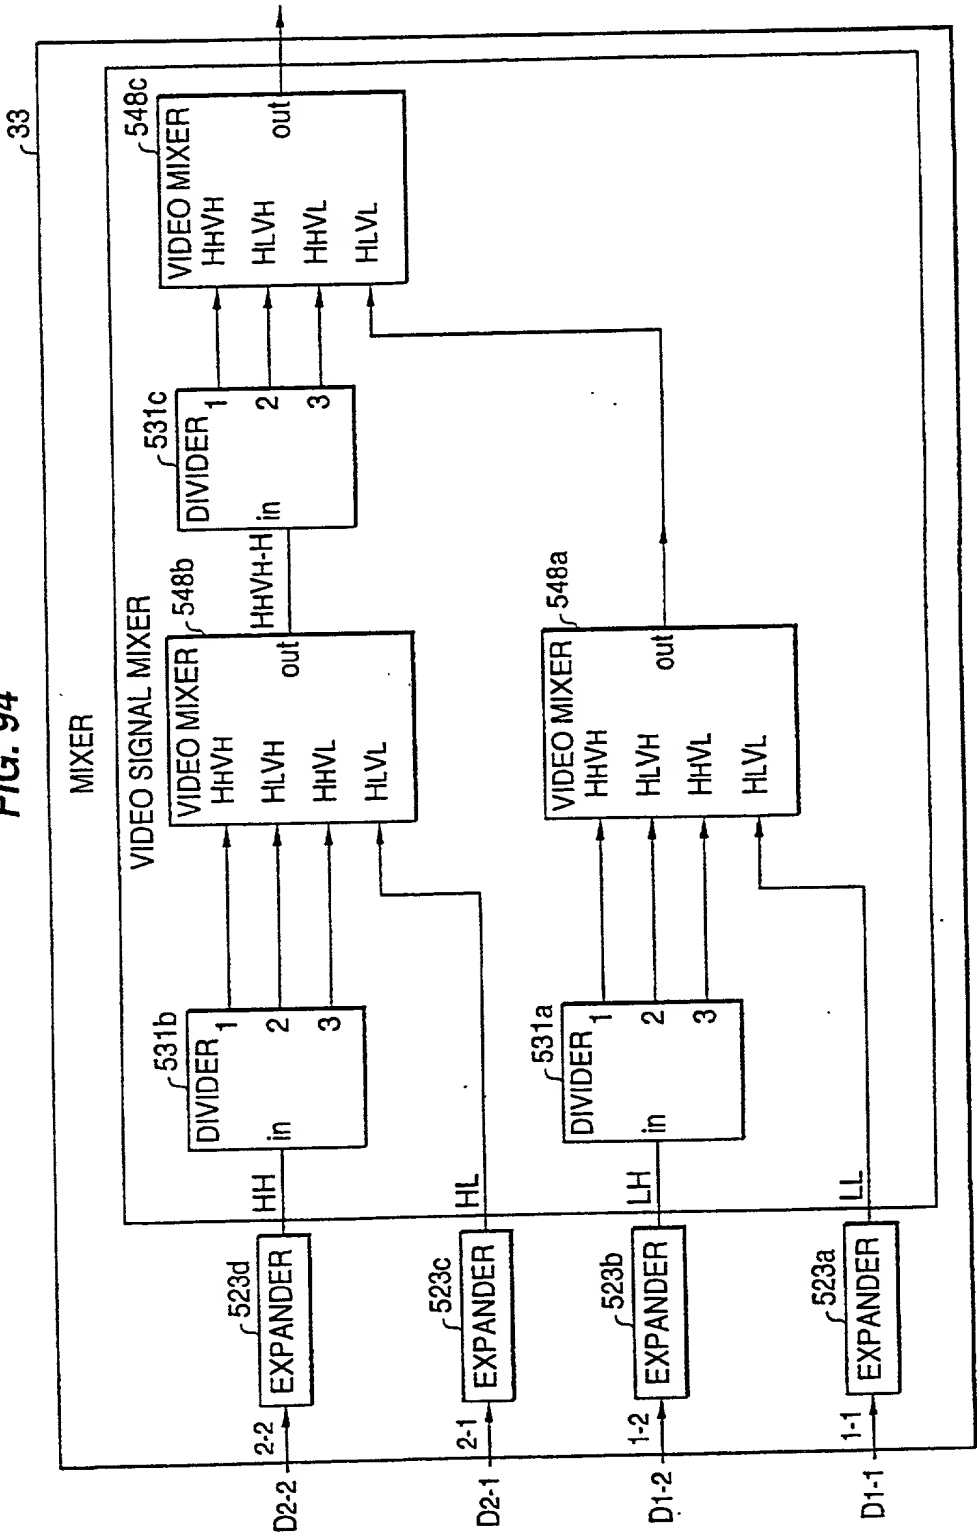


FIG. 95


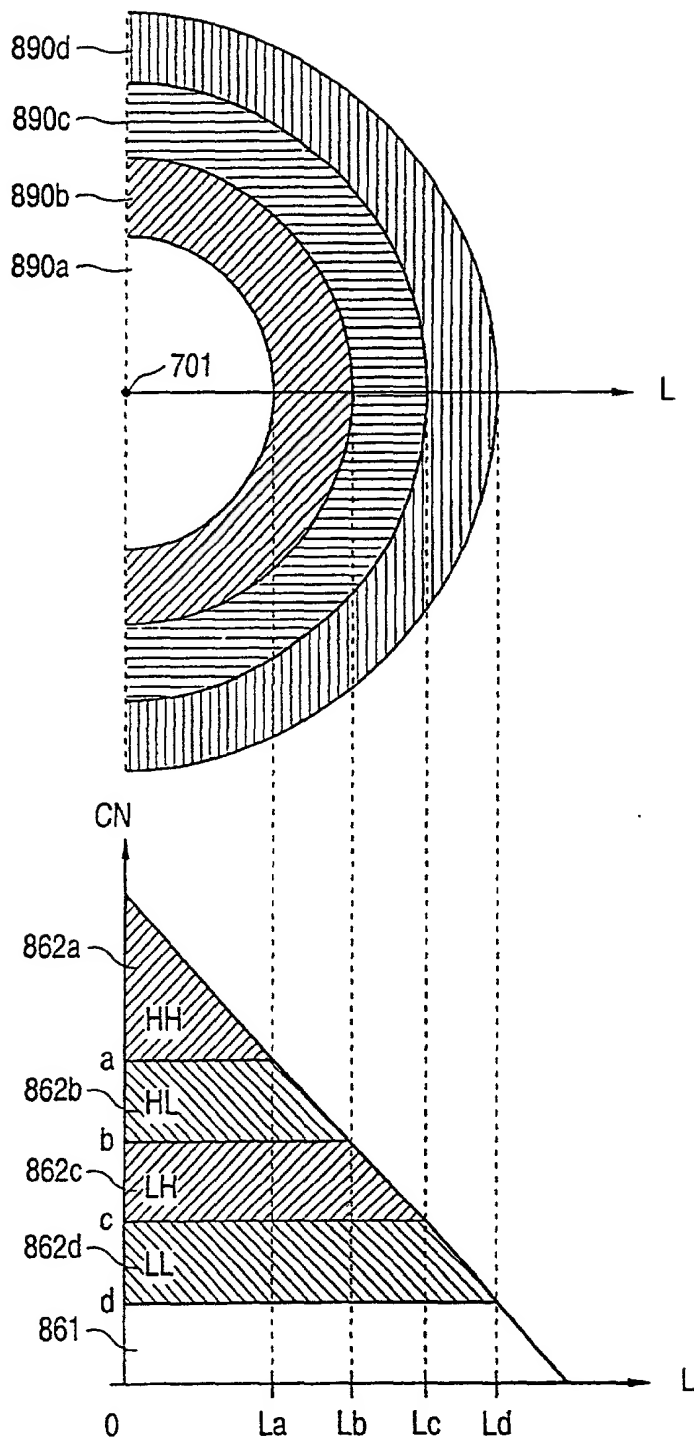


FIG. 96

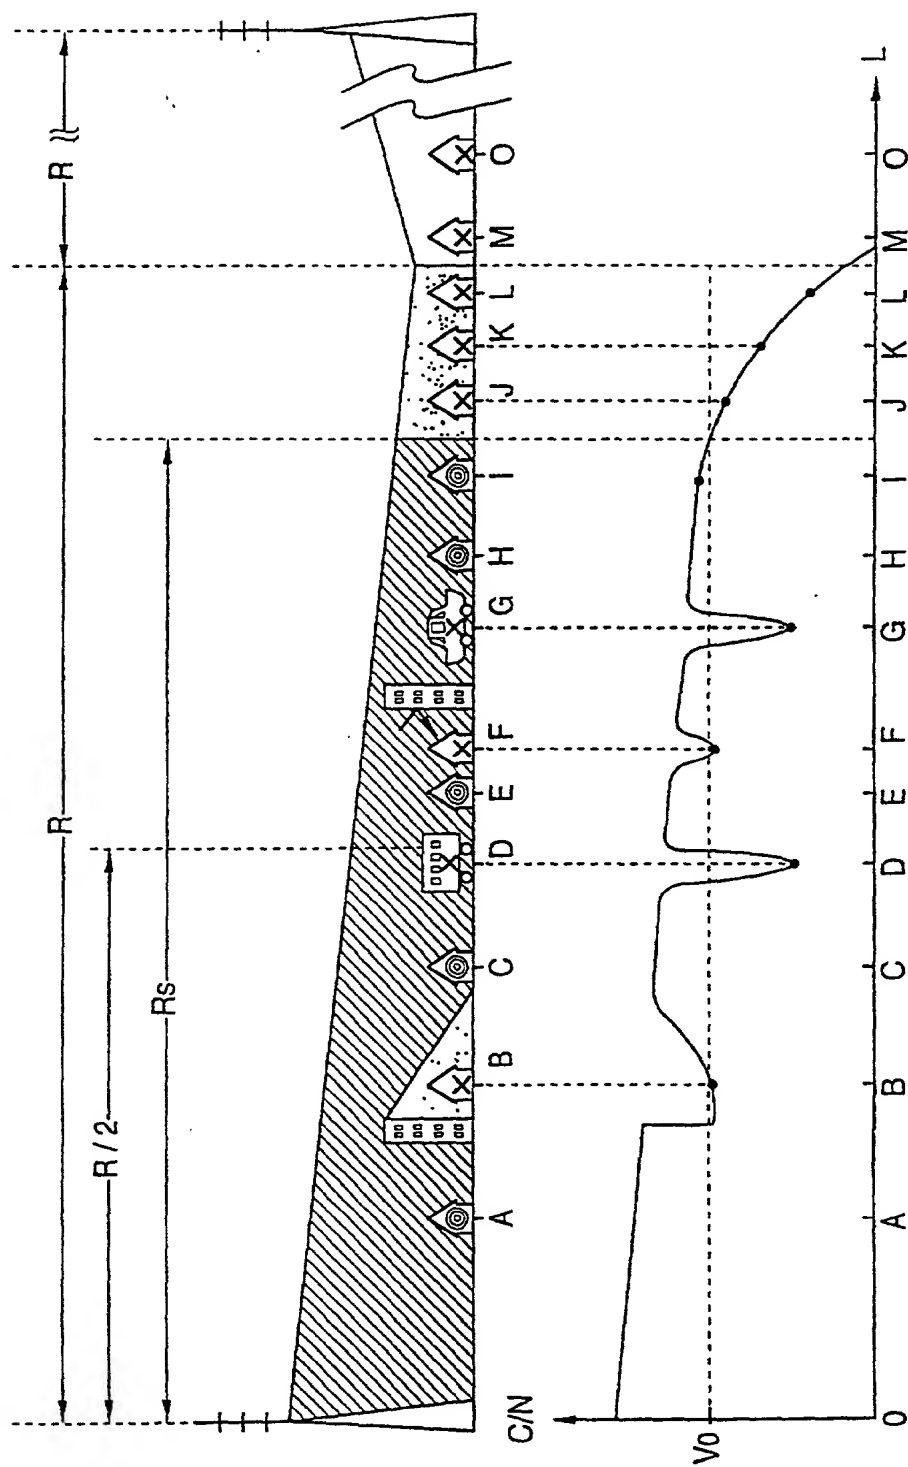

The figure consists of two parts. The upper part is a schematic diagram of a wedge-shaped material. The wedge has a total length \$R\$ and a radius at the base of \$Rs\$. A horizontal distance of \$R/2\$ is marked from the left edge to the center of the wedge's base. Points A through M are marked along the top surface of the wedge, with corresponding symbols below them. The lower part is a graph of CN versus \$L\$. The curve starts at zero, rises to a peak at point 'a' (corresponding to point G), dips slightly, rises to a second peak at point 'b' (corresponding to point H), dips again, rises to a third peak at point 'c' (corresponding to point I), and finally drops to zero at point 'd' (corresponding to point J). The x-axis is labeled with points A, B, C, D, E, F, G, H, I, J, K, L, M, O.

FIG. 98

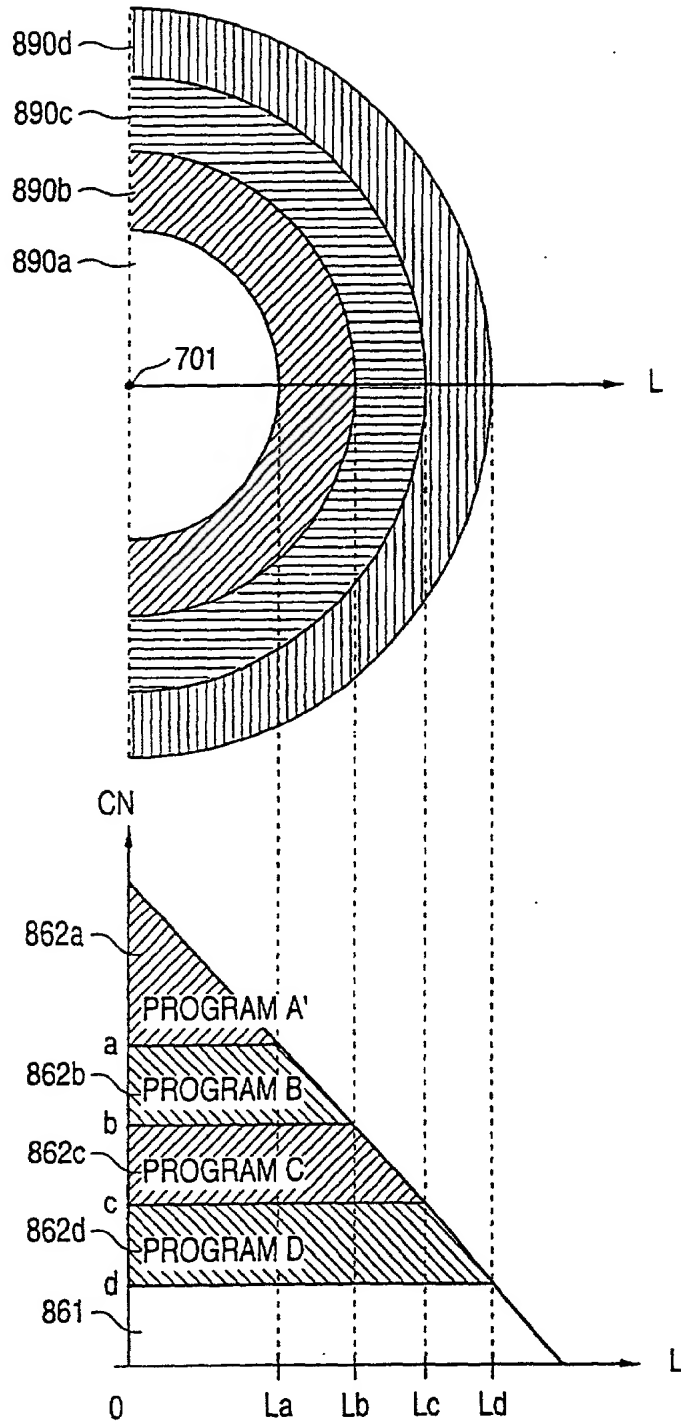


FIG. 99

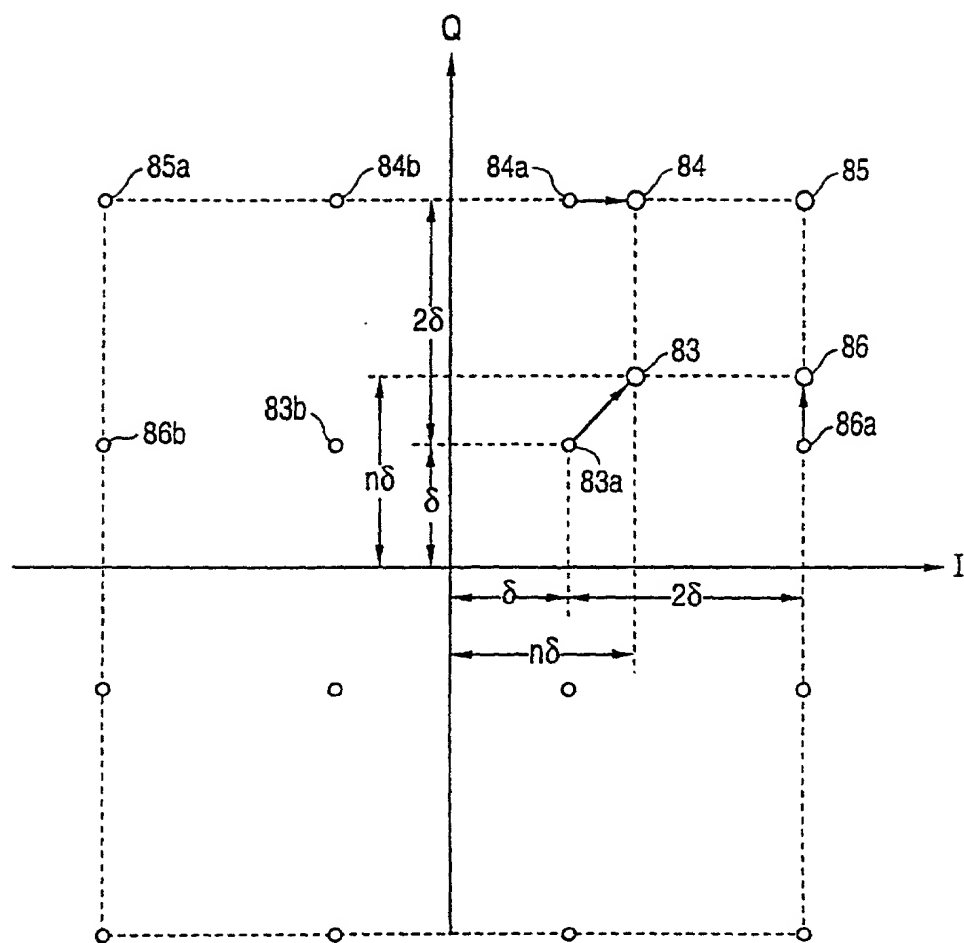


FIG. 100


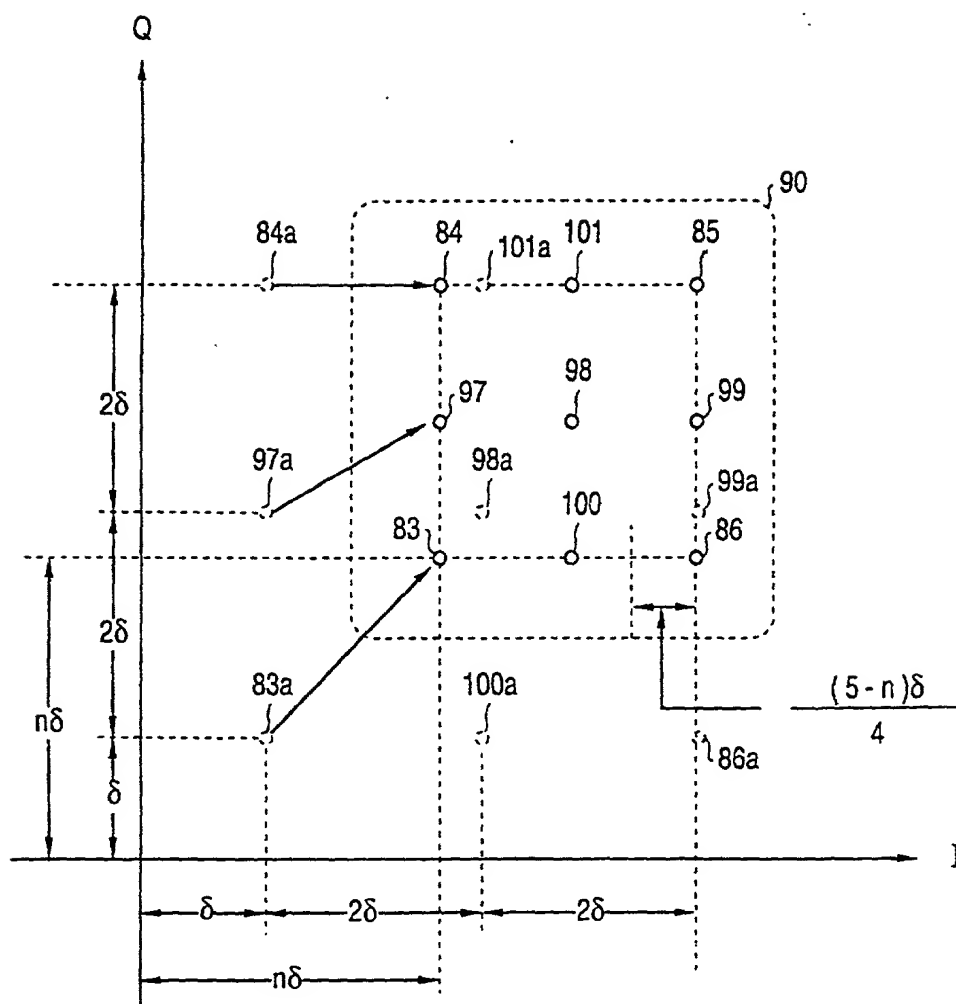


FIG. 101

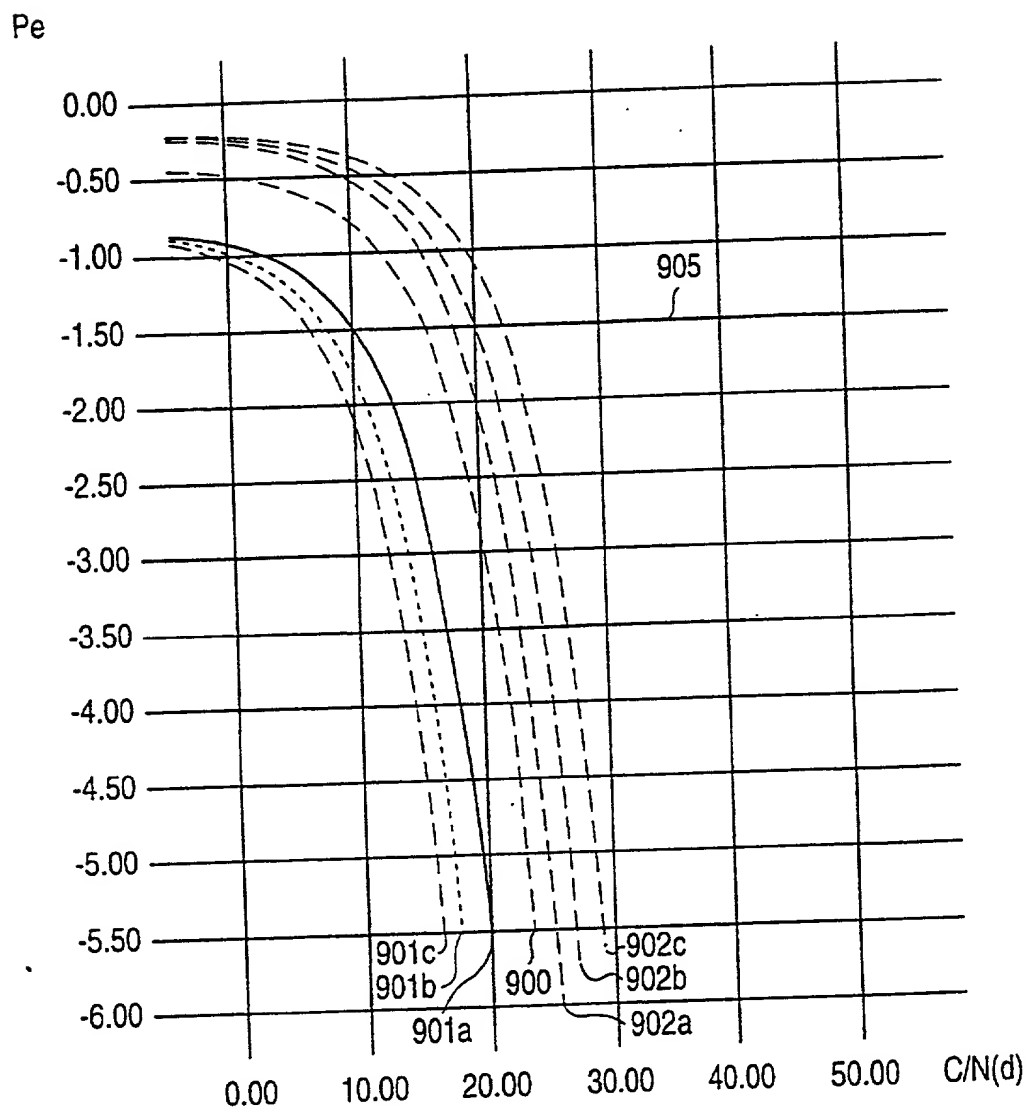

Pe

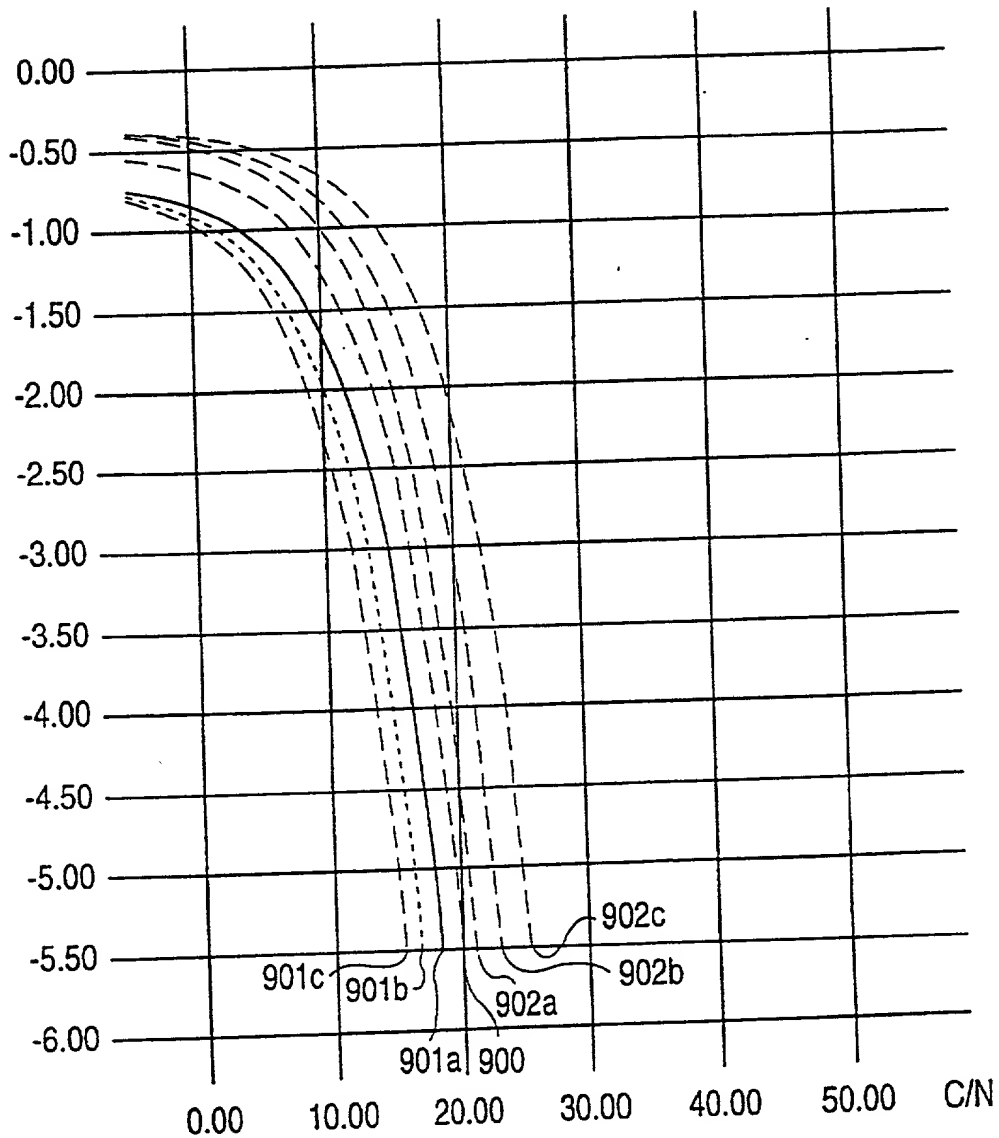


FIG. 103

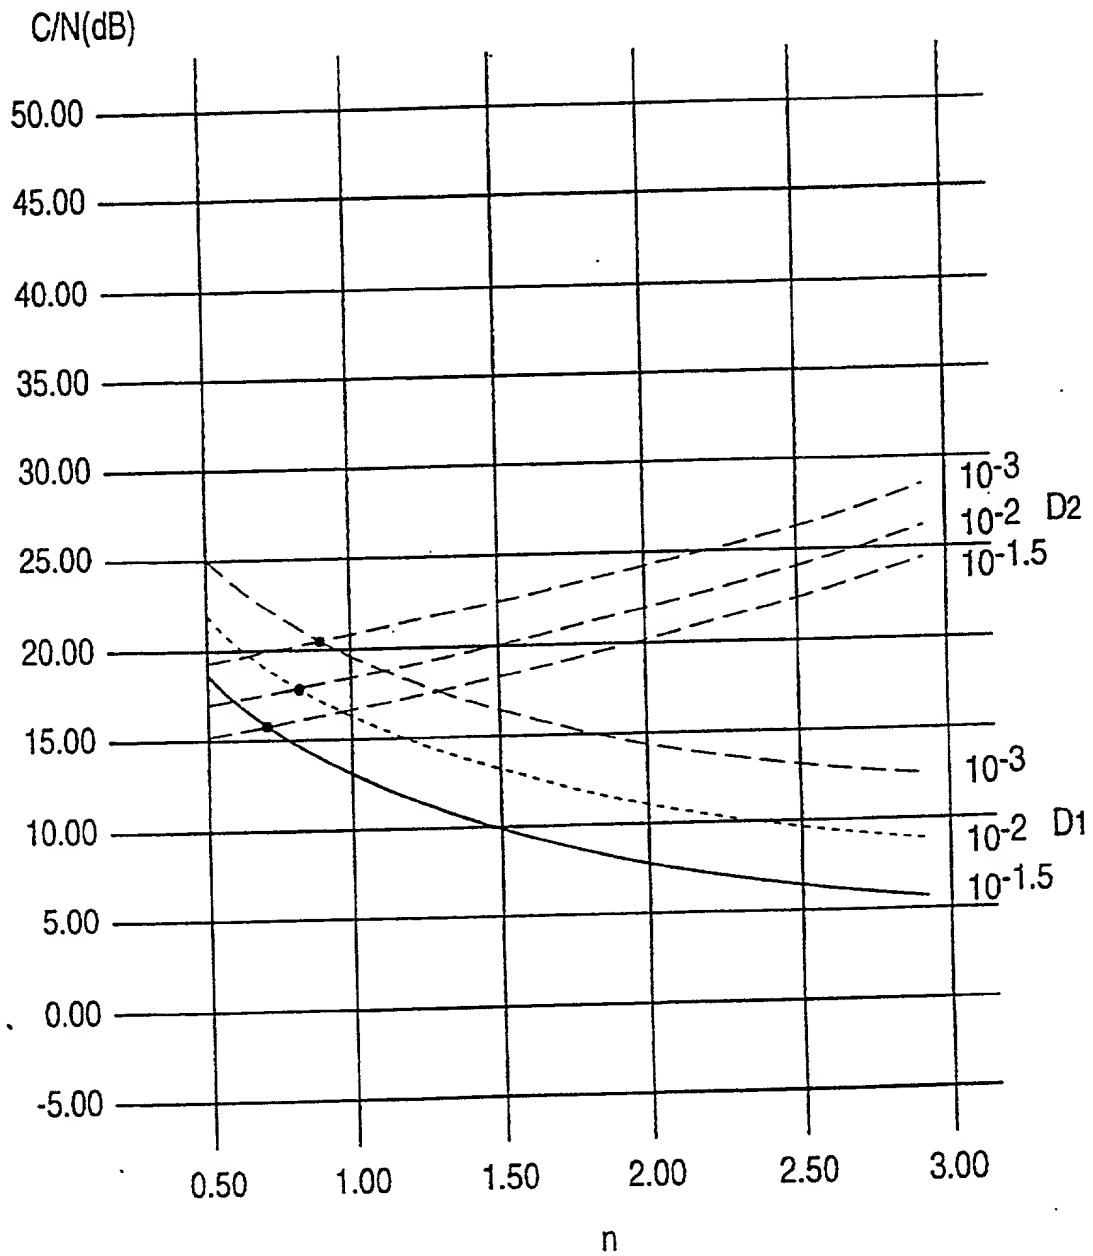


FIG. 104

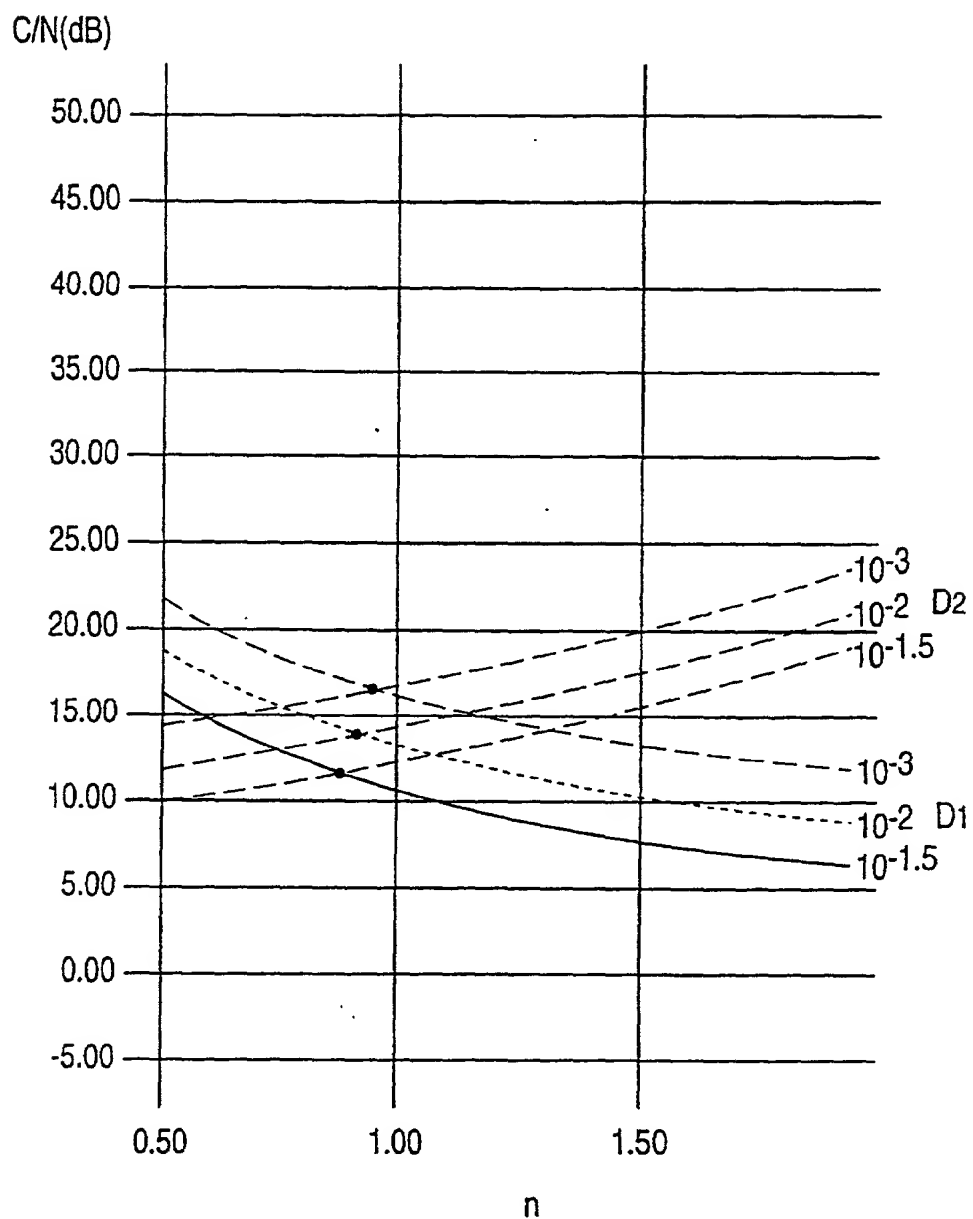


FIG. 105


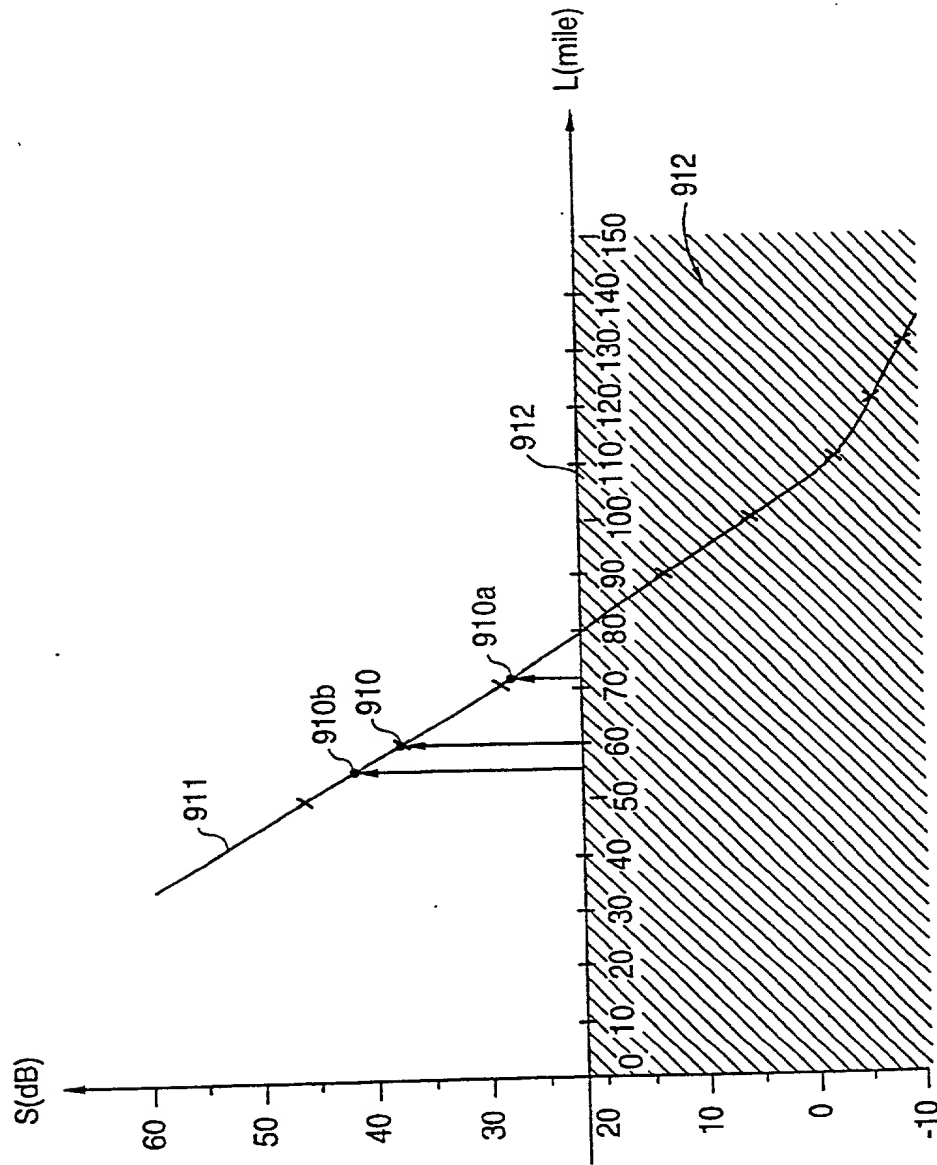


FIG. 106

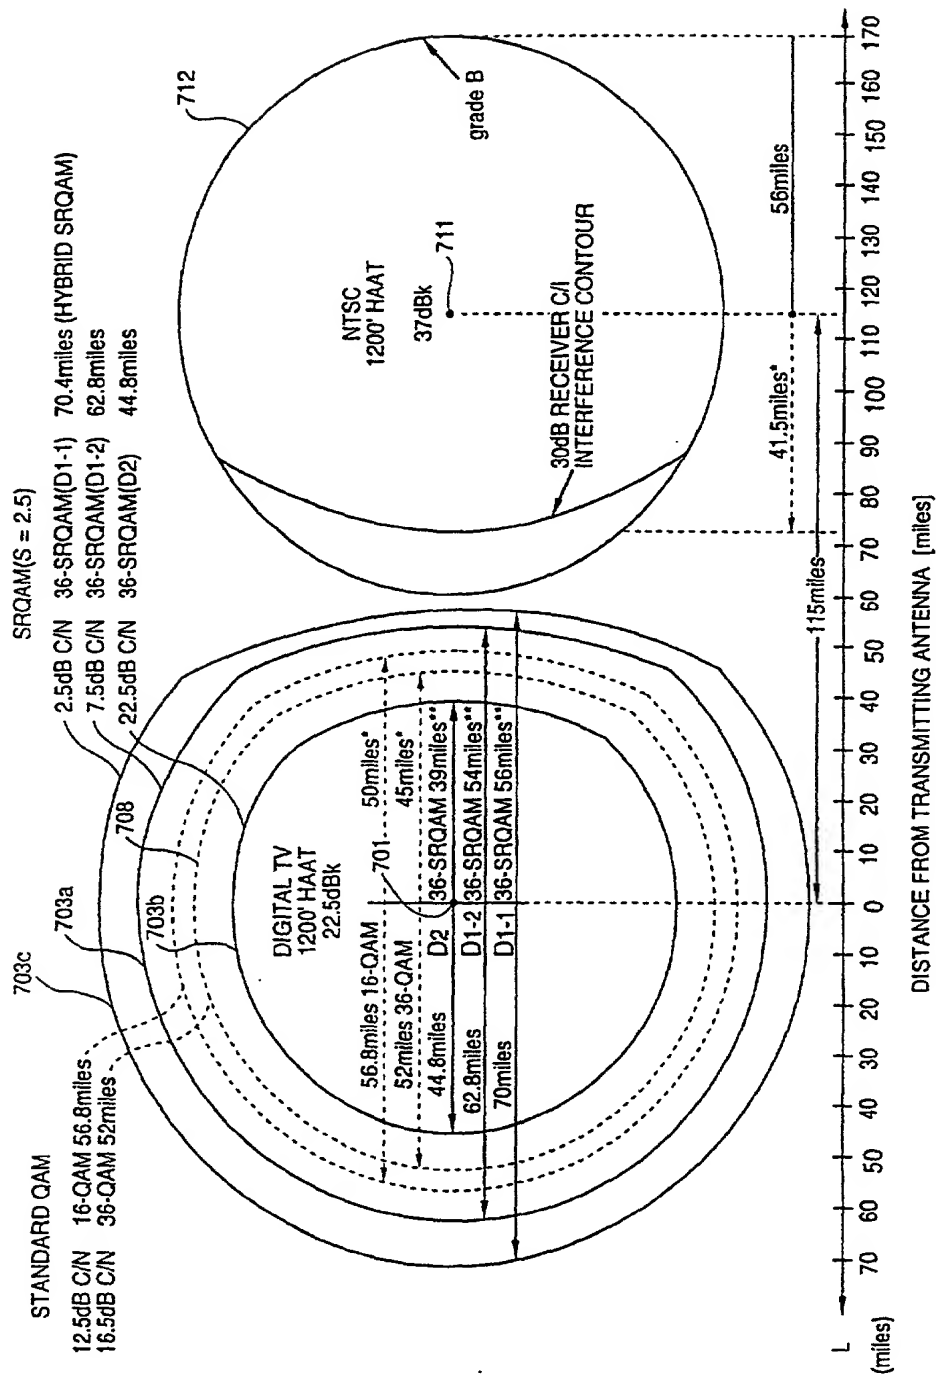

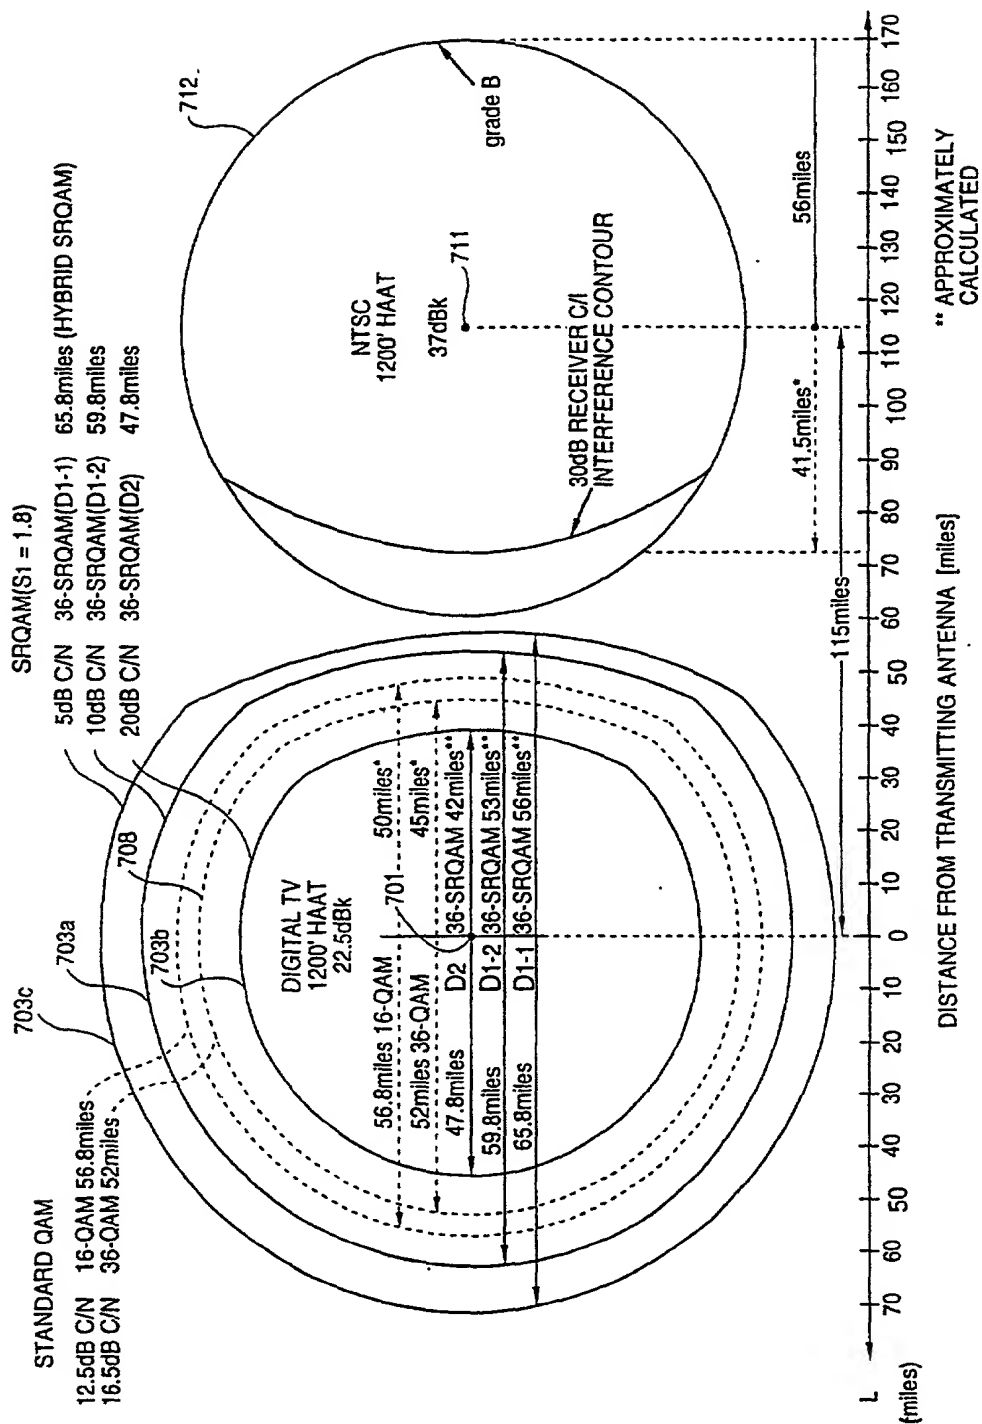


FIG. 108(a)

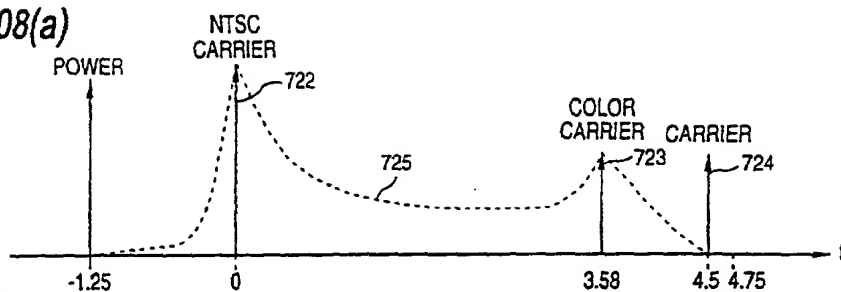


FIG. 108(b)

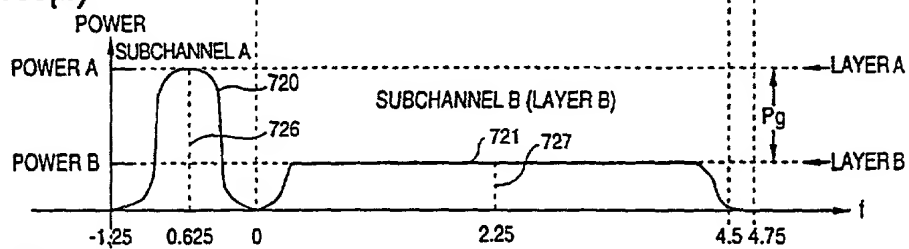


FIG. 108(c)

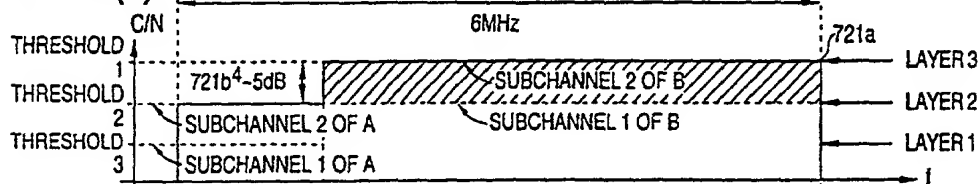


FIG. 108(d)

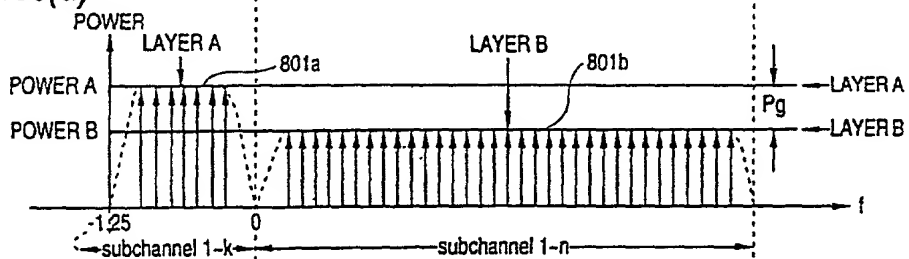


FIG. 108(e)

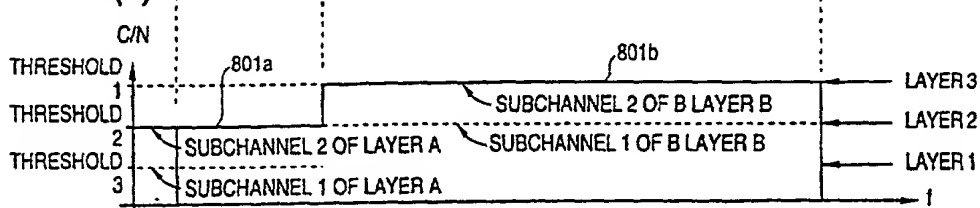


FIG. 109

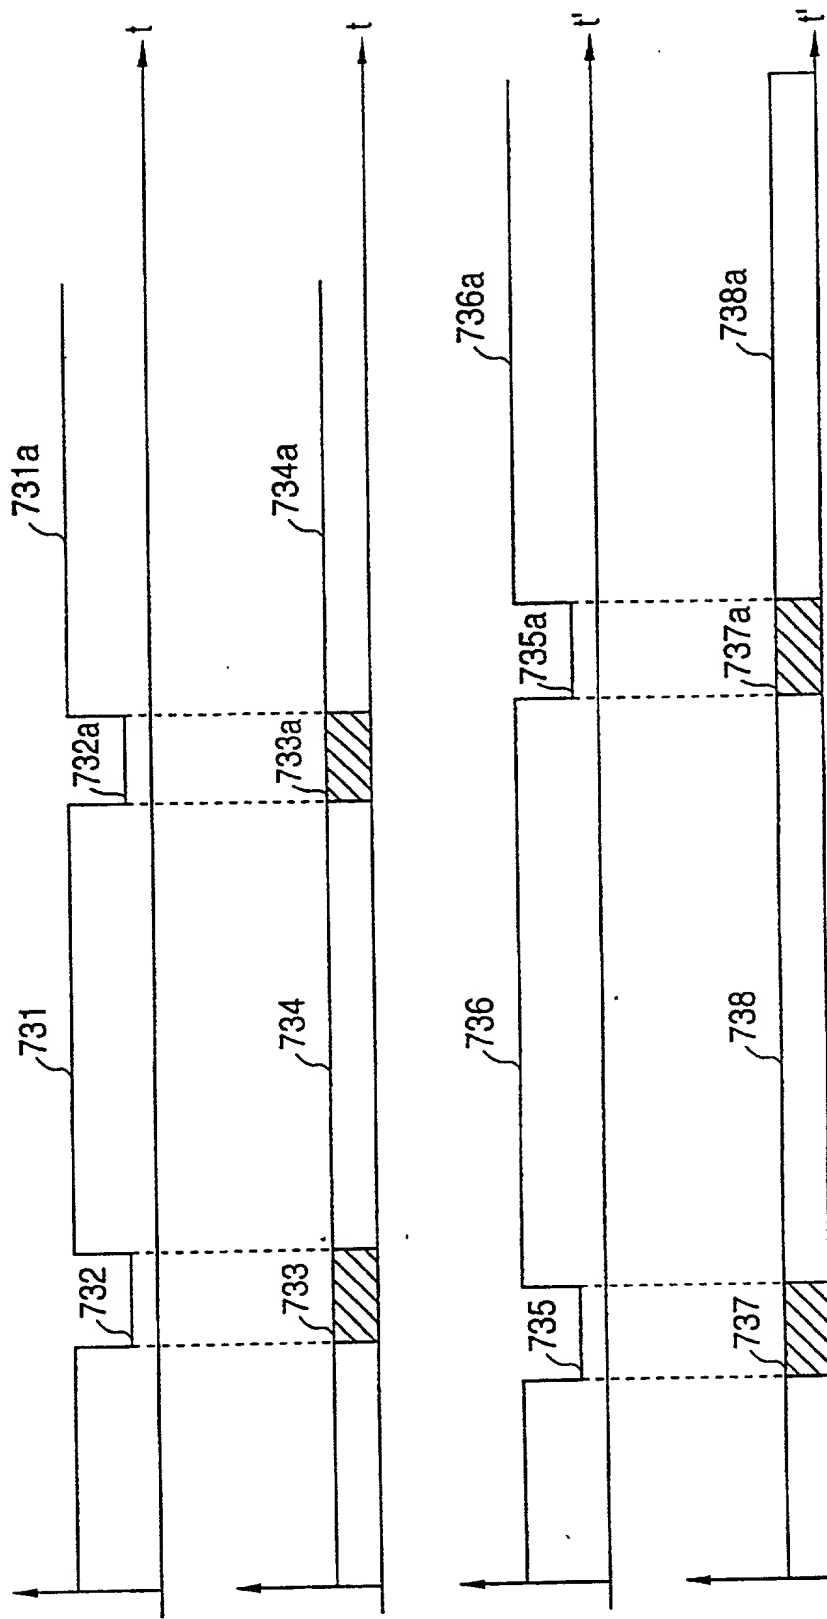


FIG. 110



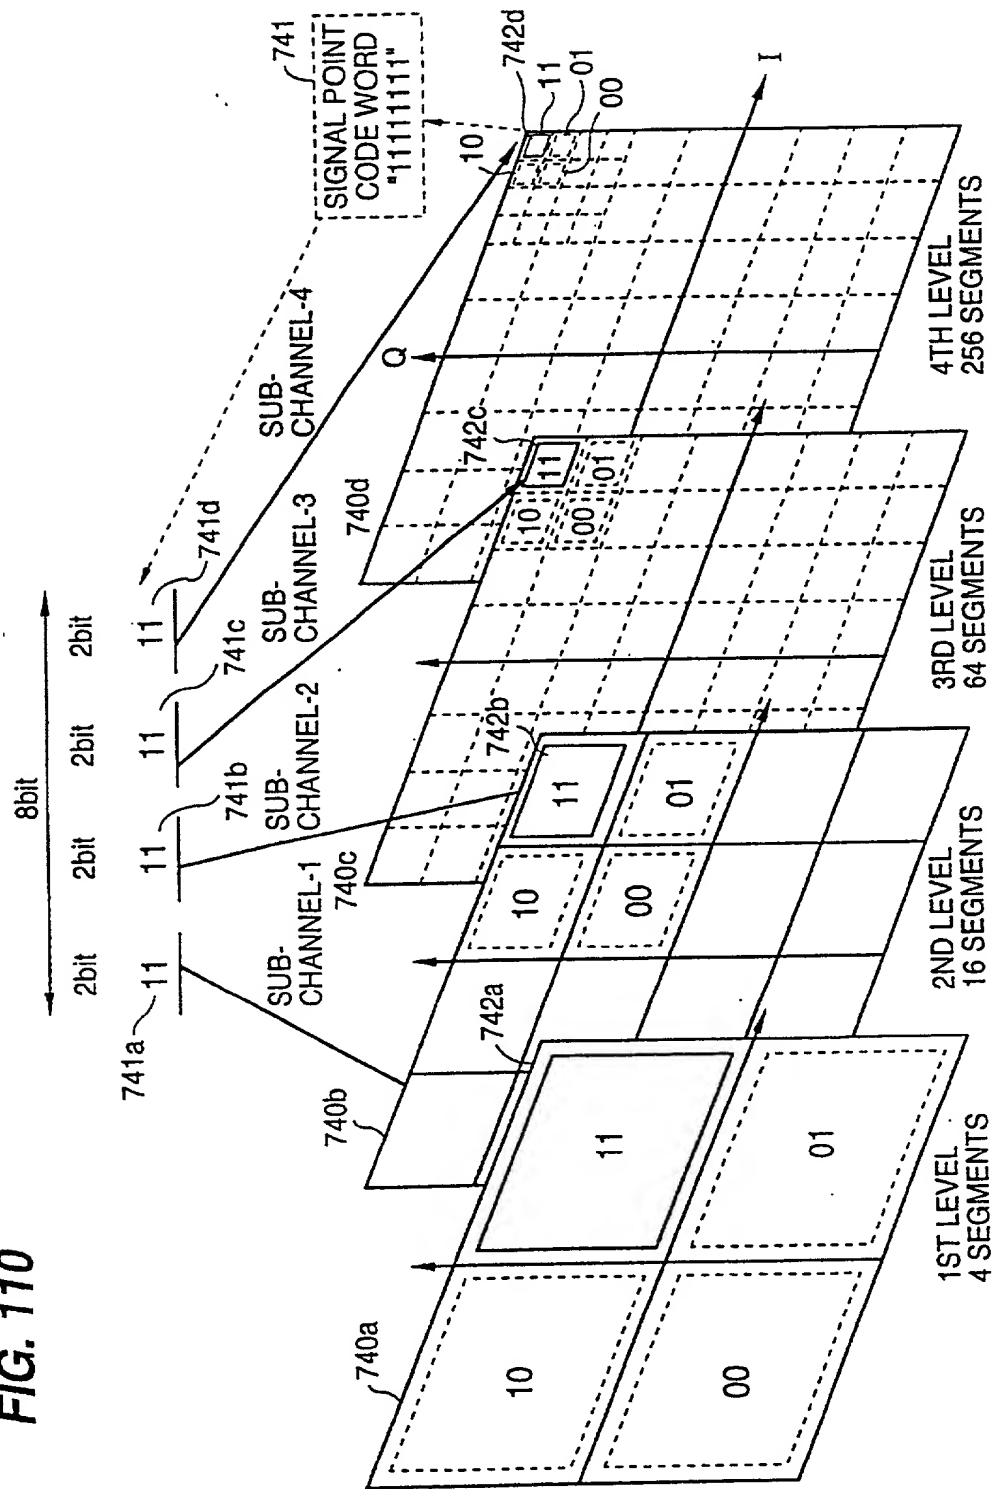


FIG. 111

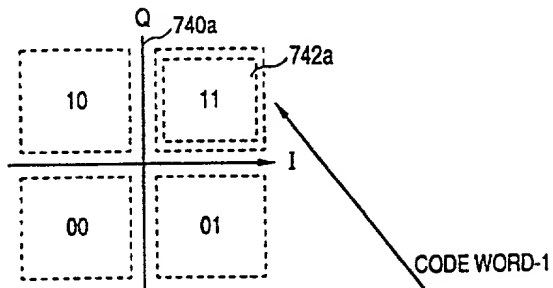
SUBCHANNEL-1 (SRQAM:D1 = 2bit)



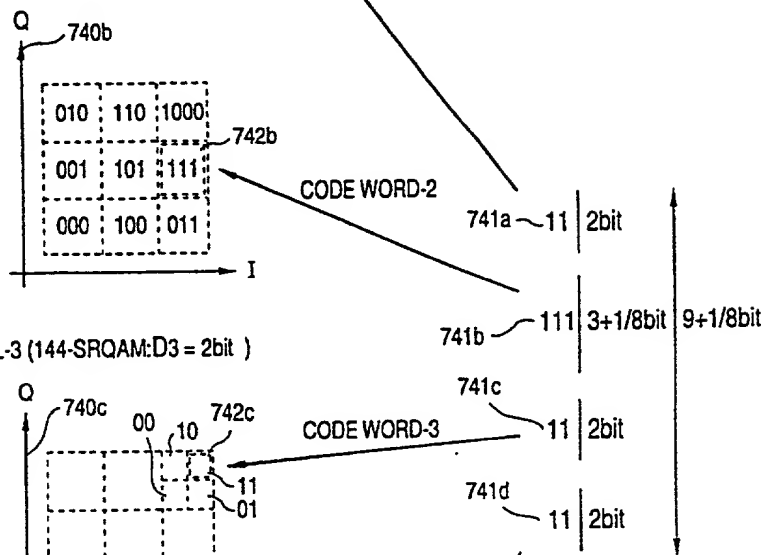
SUBCHANNEL-2 (36-SRQAM:D2 = 3bit + 1/8bit)



SUBCHANNEL-3 (144-SRQAM:D3 = 2bit)

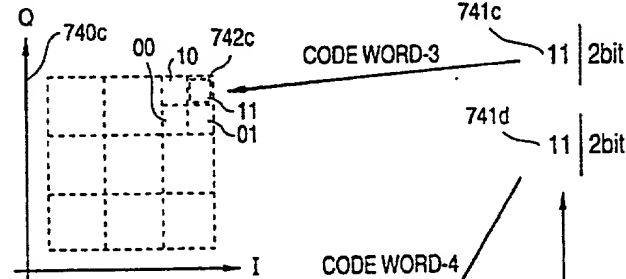


SUBCHANNEL-4 (576-SRQAM:D4 = 2bit)

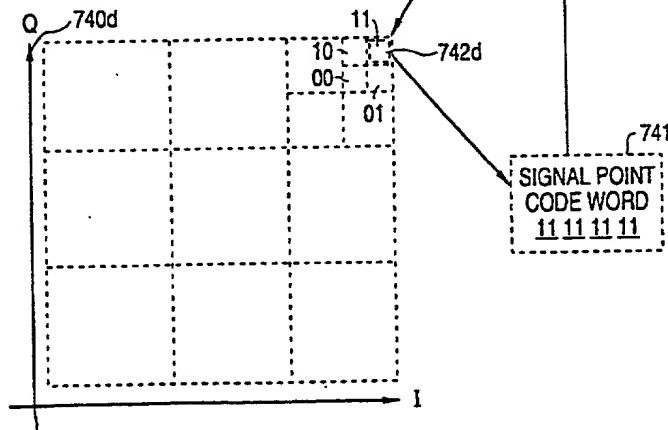


006260-9462/960

FIG. 112


SUBCHANNEL-1 (SRQAM:D1 = 2bit)




SUBCHANNEL-2 (16-SRQAM:D2 = 2bit)

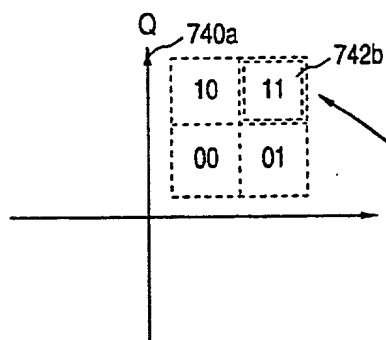

SUBCHANNEL-3 (64-SRQAM:D3 = 2bit)



SUBCHANNEL-4 (256-SRQAM:D4 = 2bit)





CODE WORD-1

CODE WORD-2

CODE WORD-3

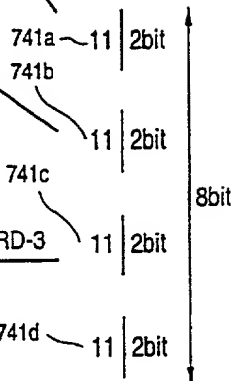CODE WORD-4



006260" 24622960

FIG. 113

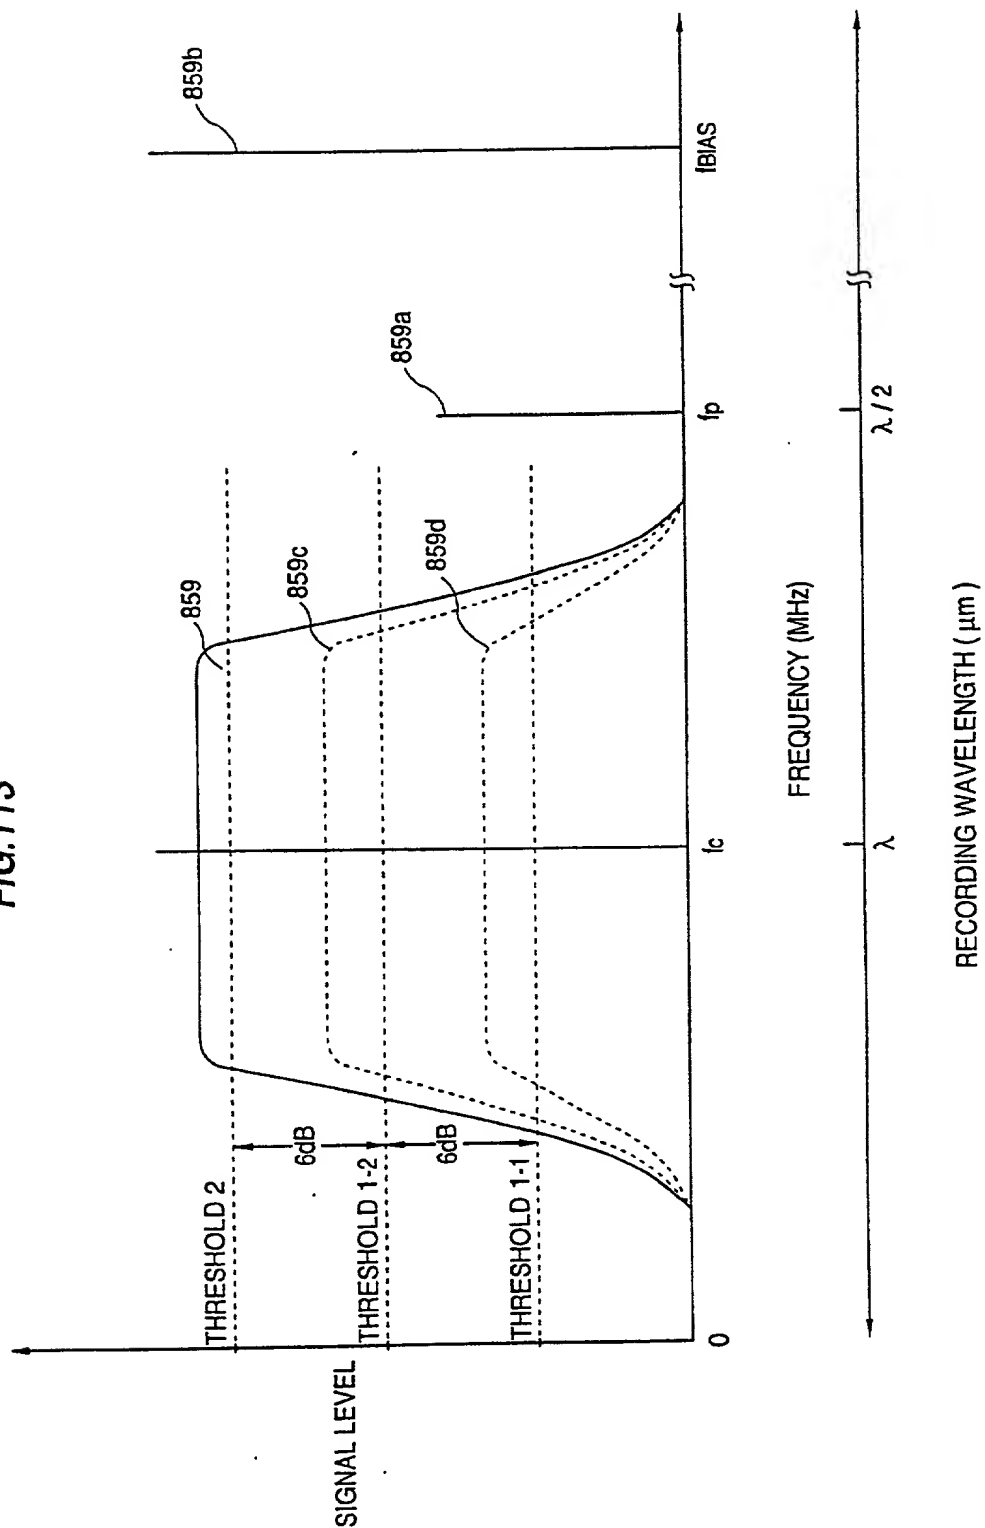


FIG. 114

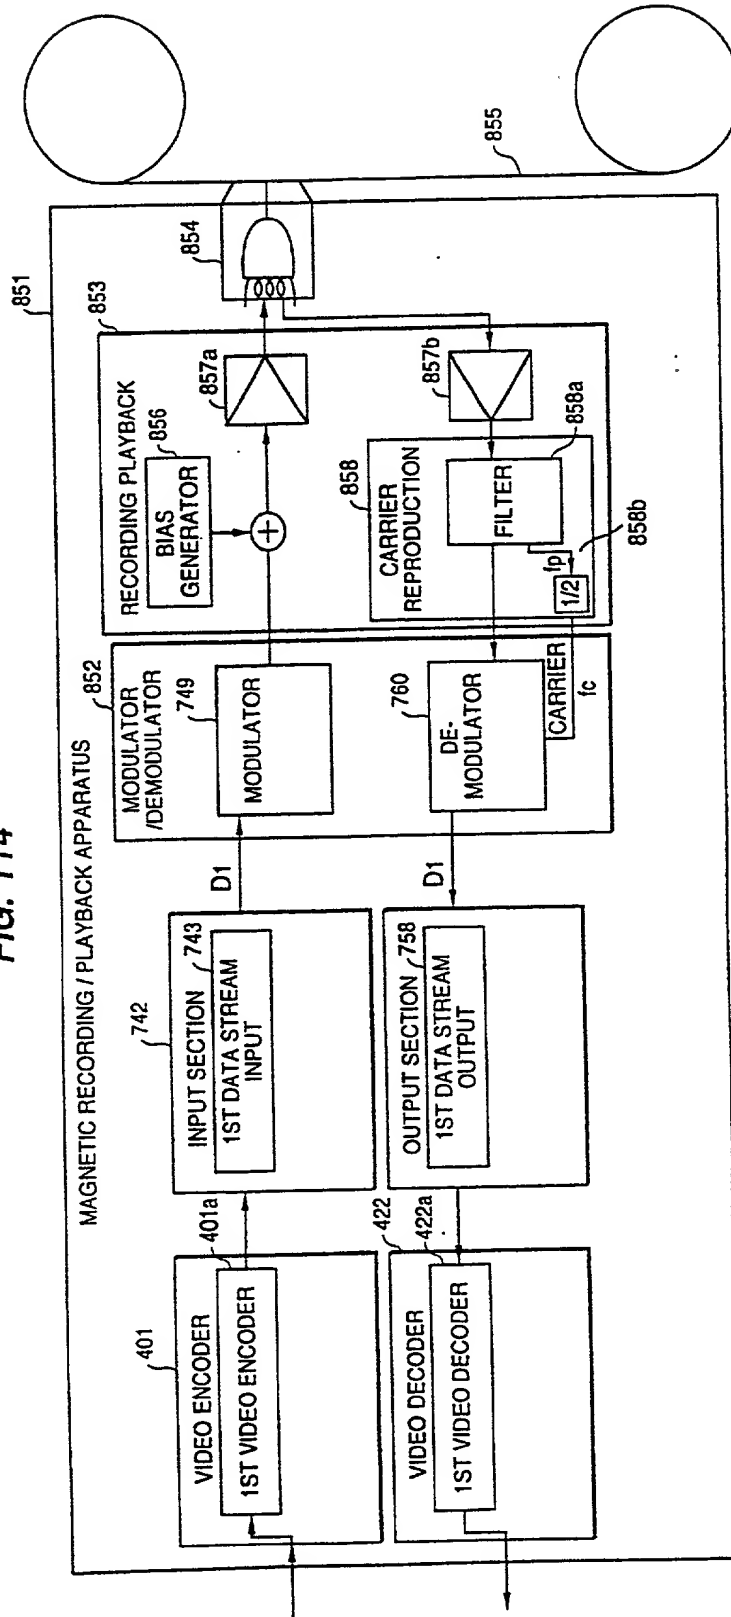


FIG. 115

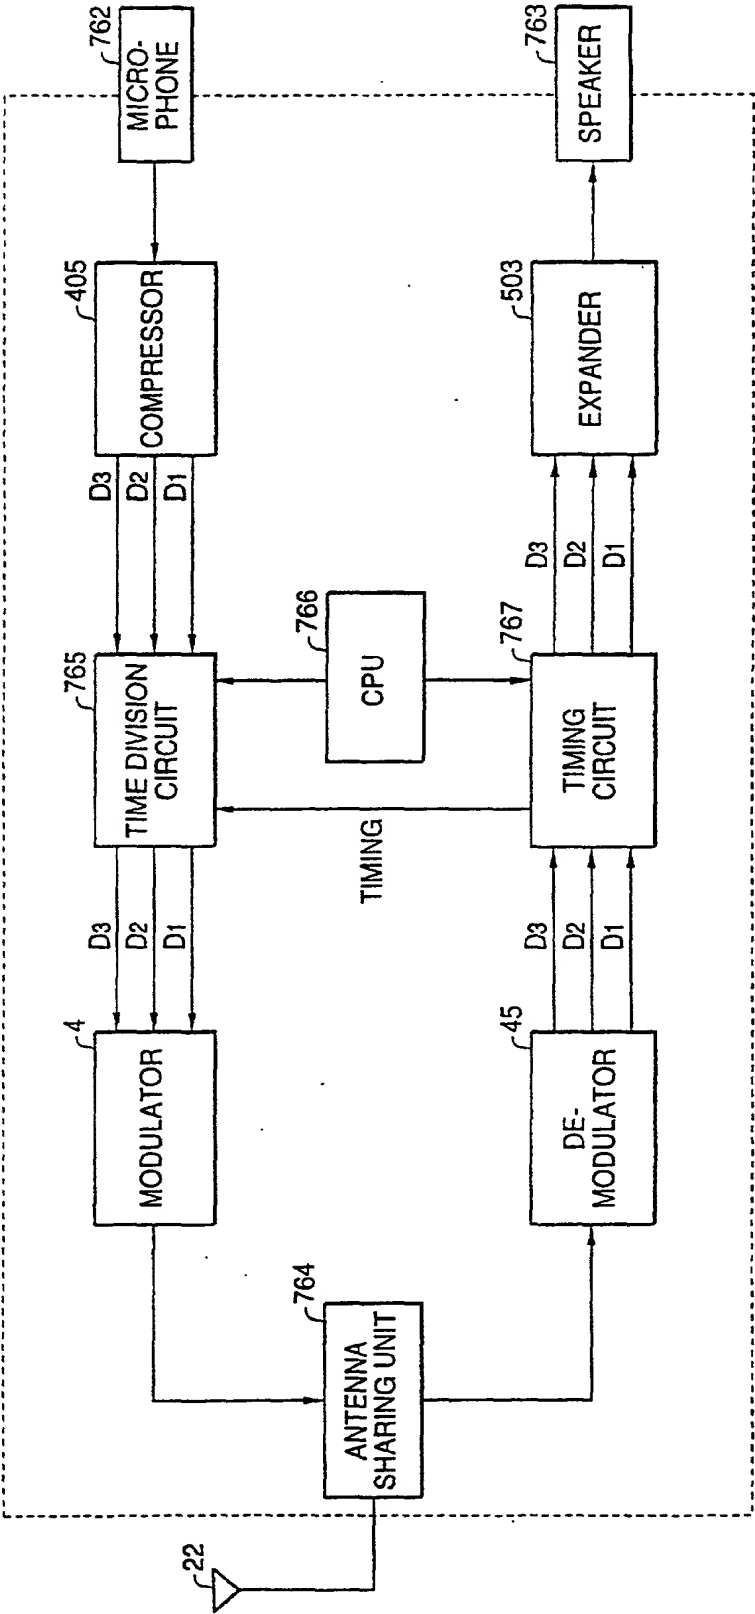


FIG. 116

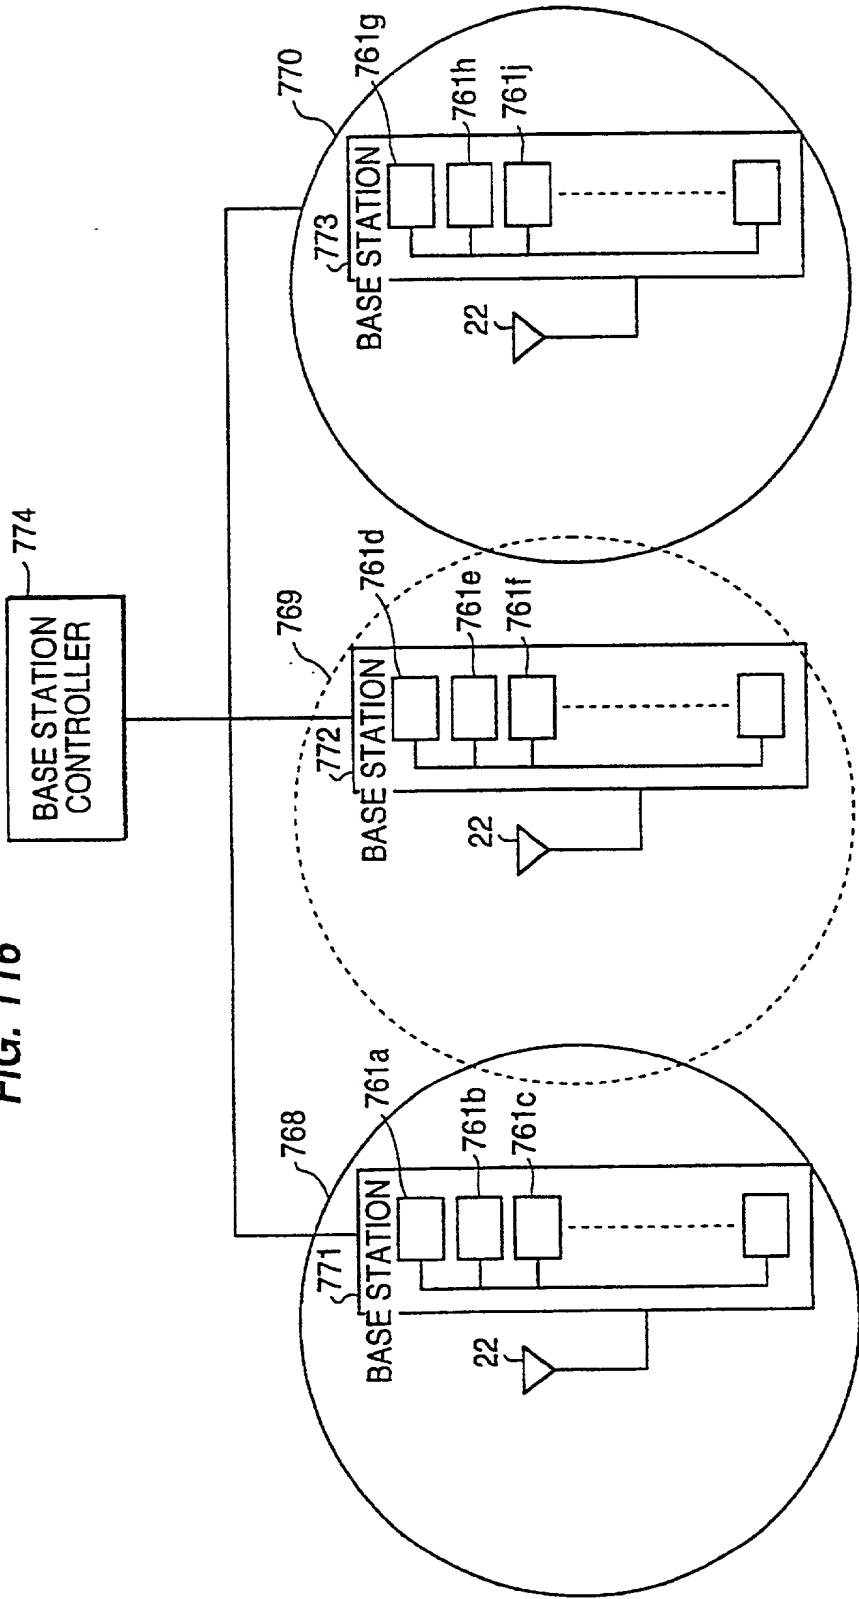


FIG. 117

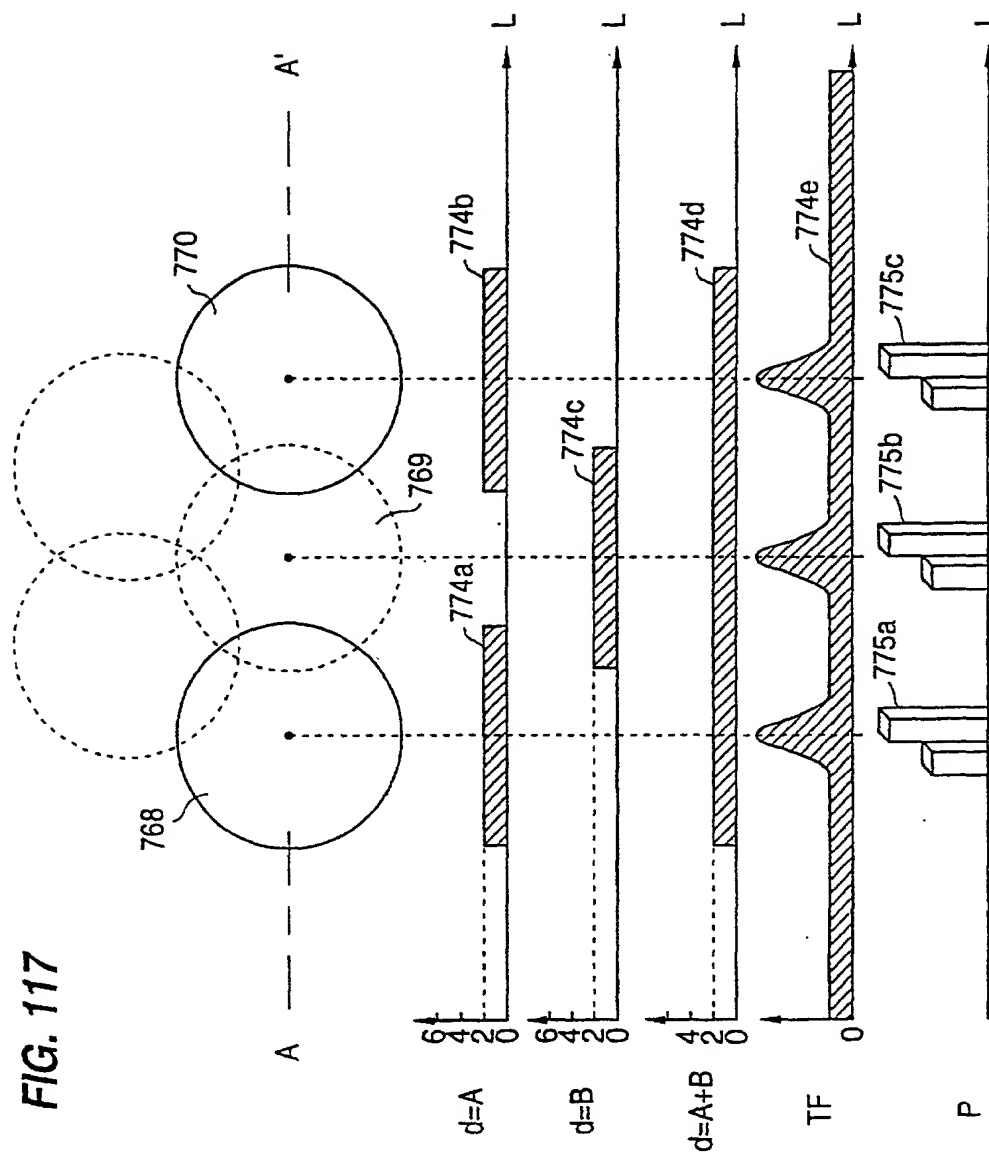


FIG. 118

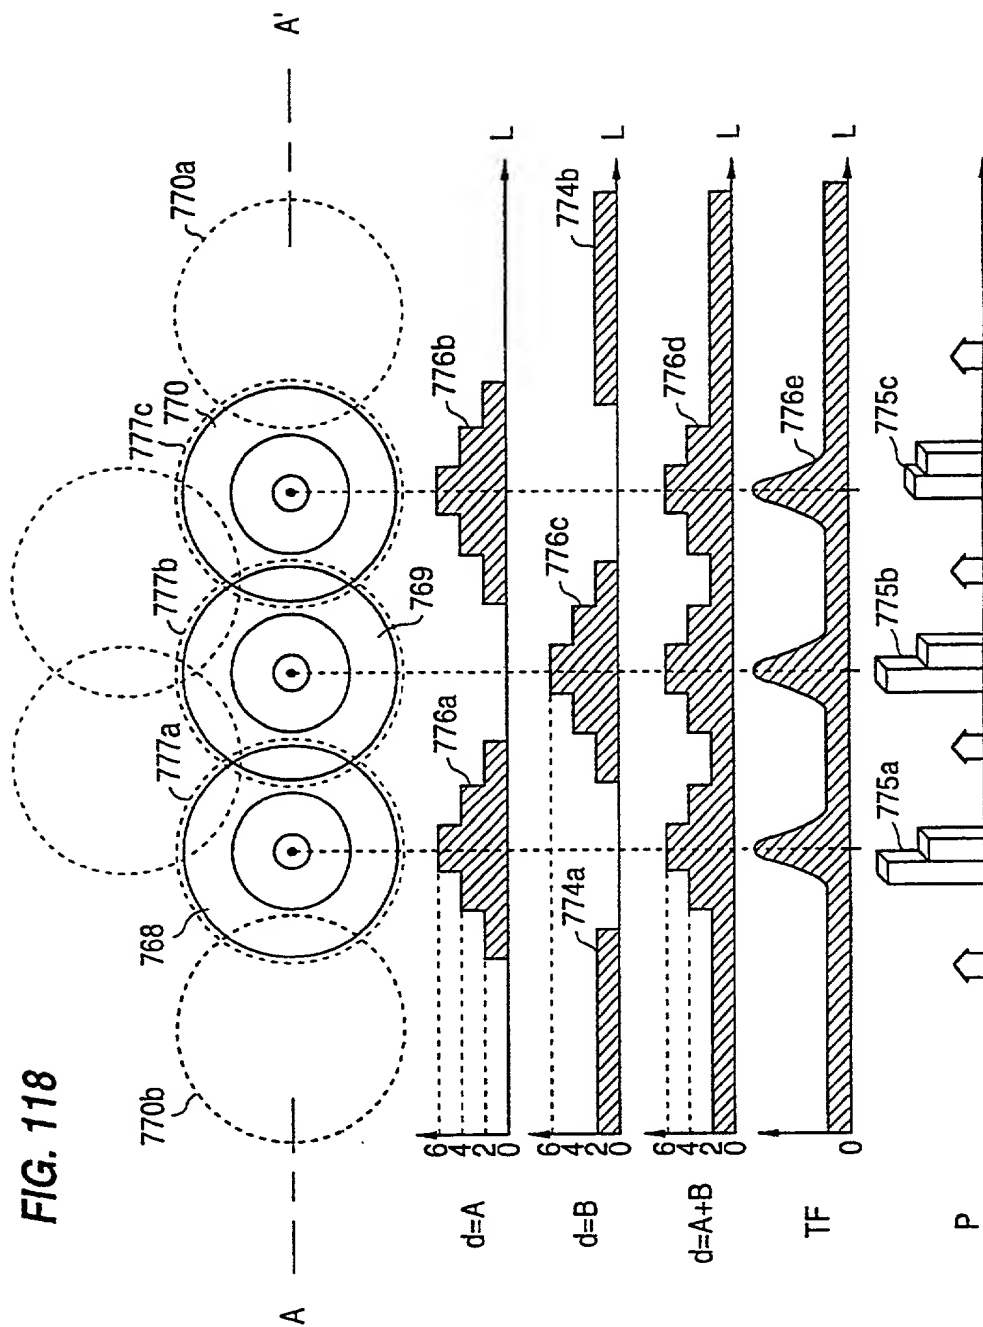


FIG. 119(a)


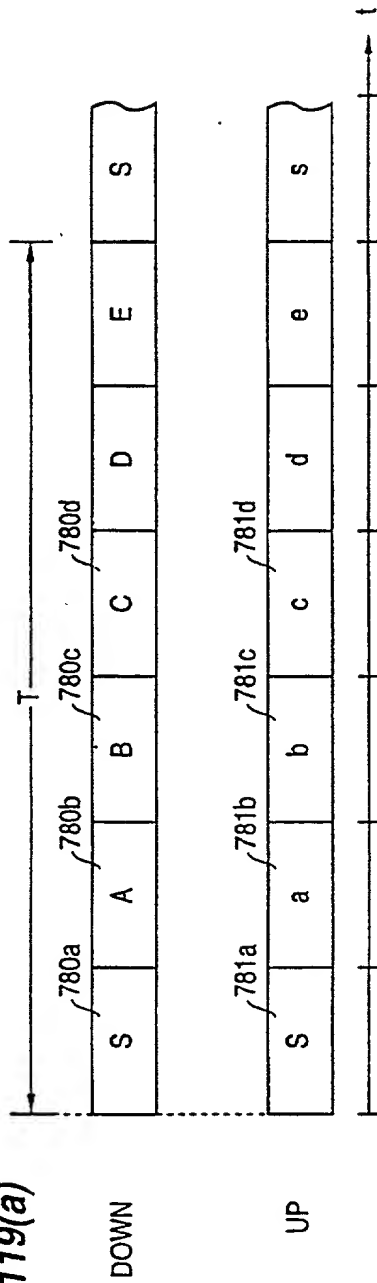


FIG. 119(b)

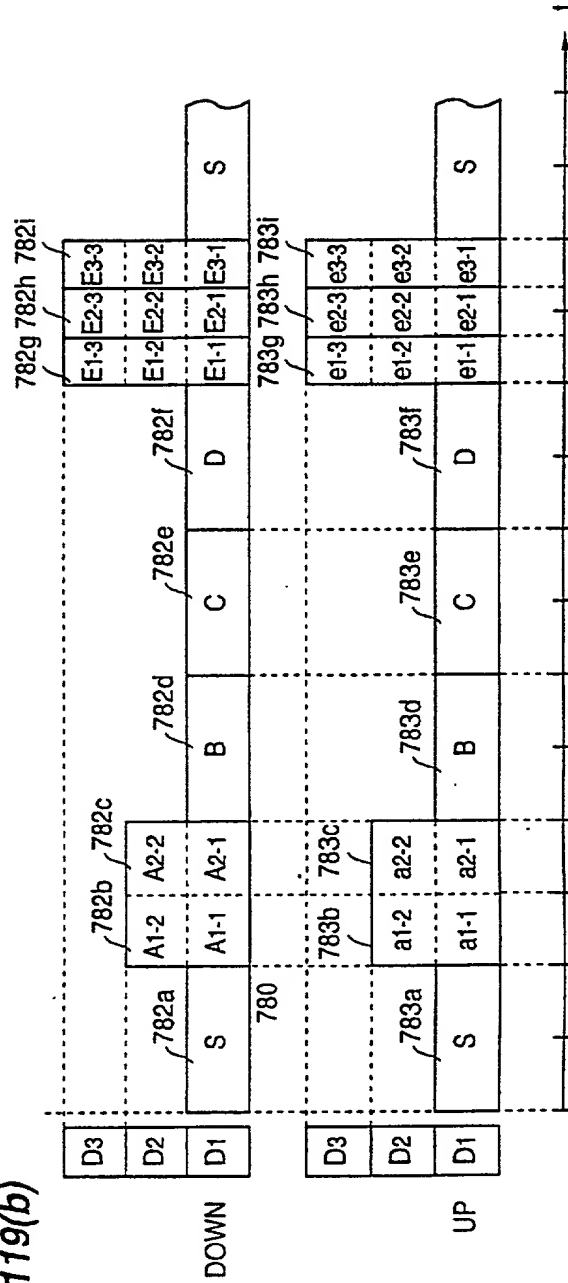

[illegible]

FIG. 120(b)

FIG. 120(b)

FIG. 121

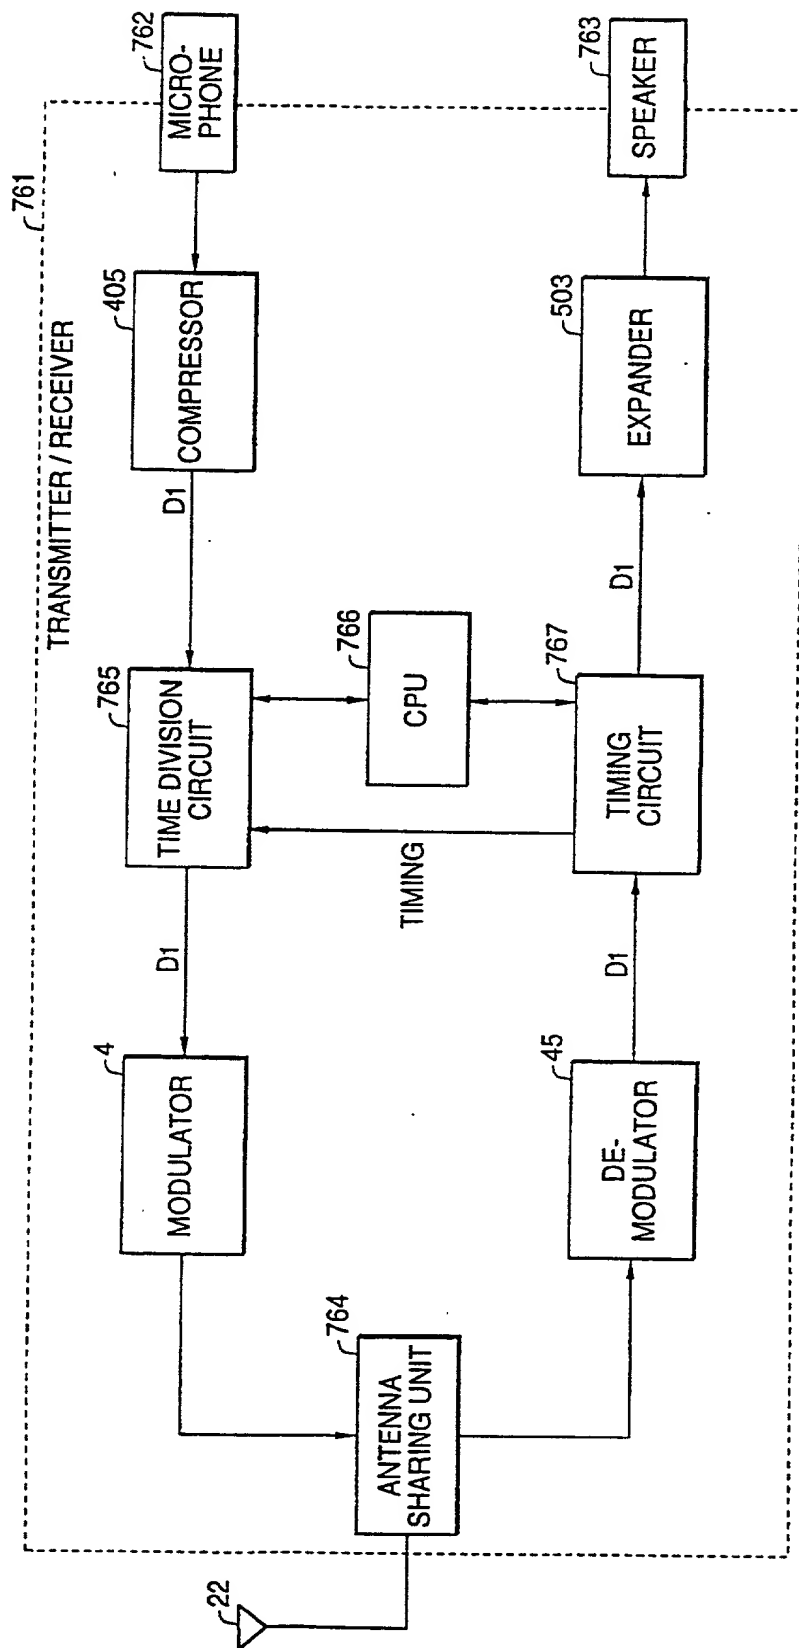


FIG. 122


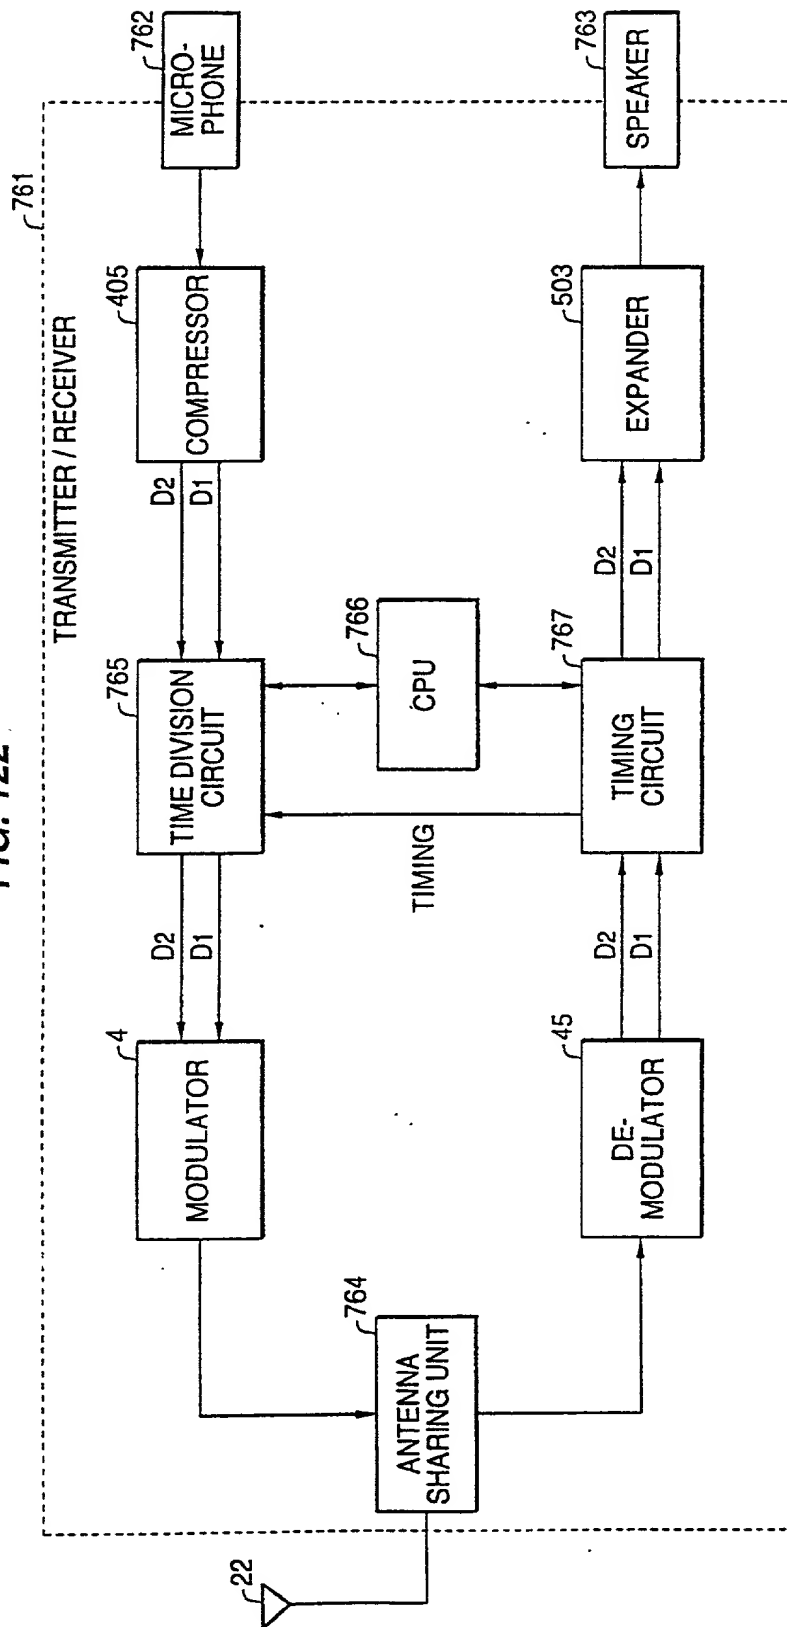


FIG. 123

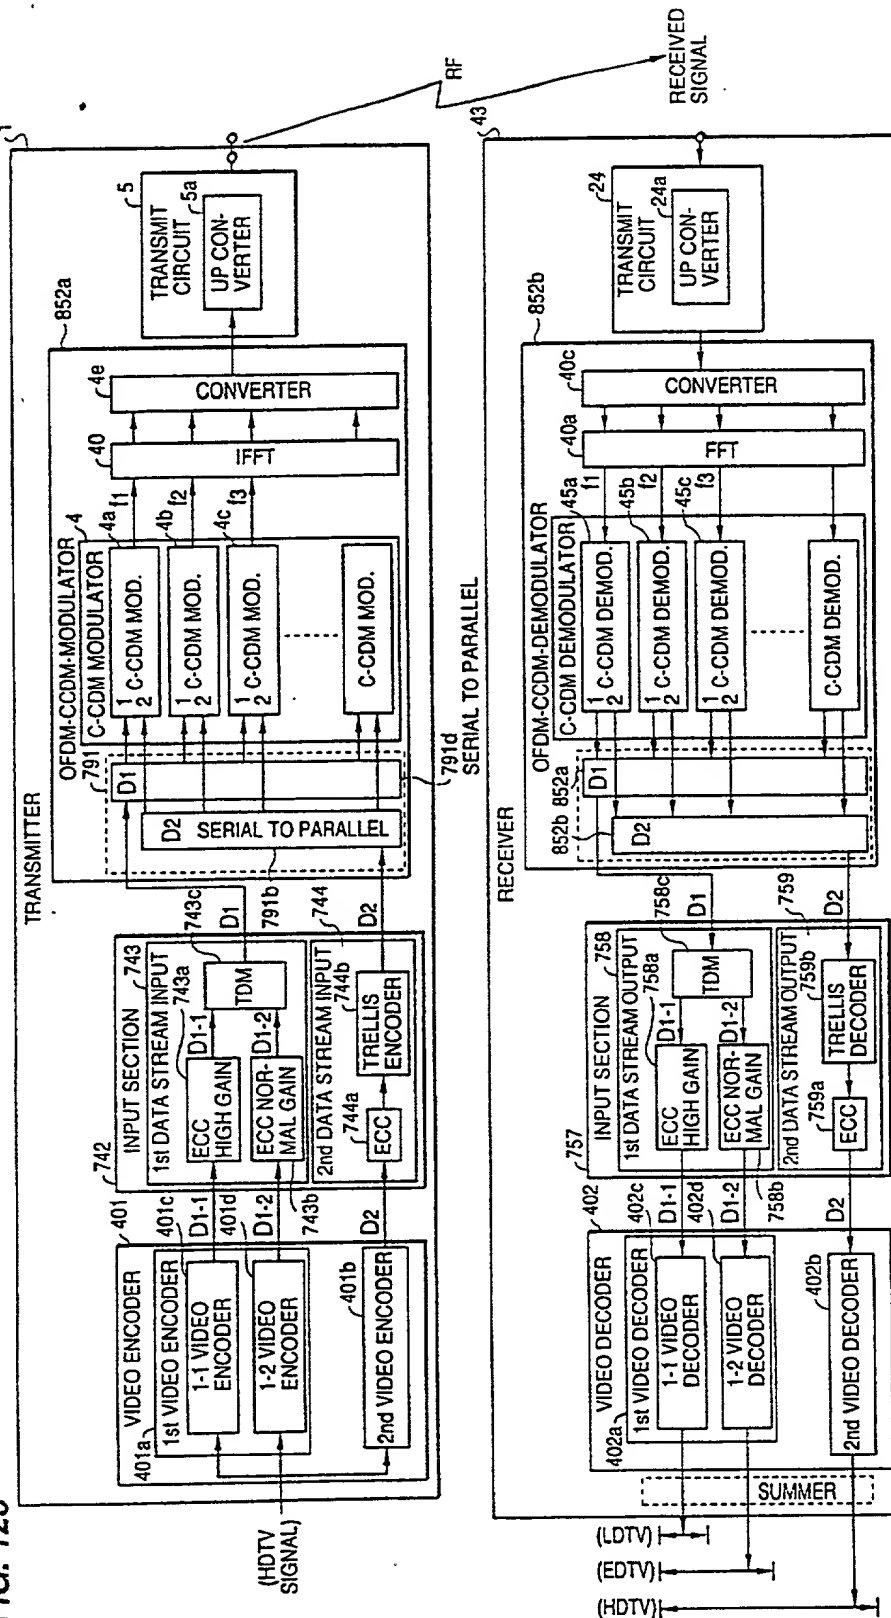

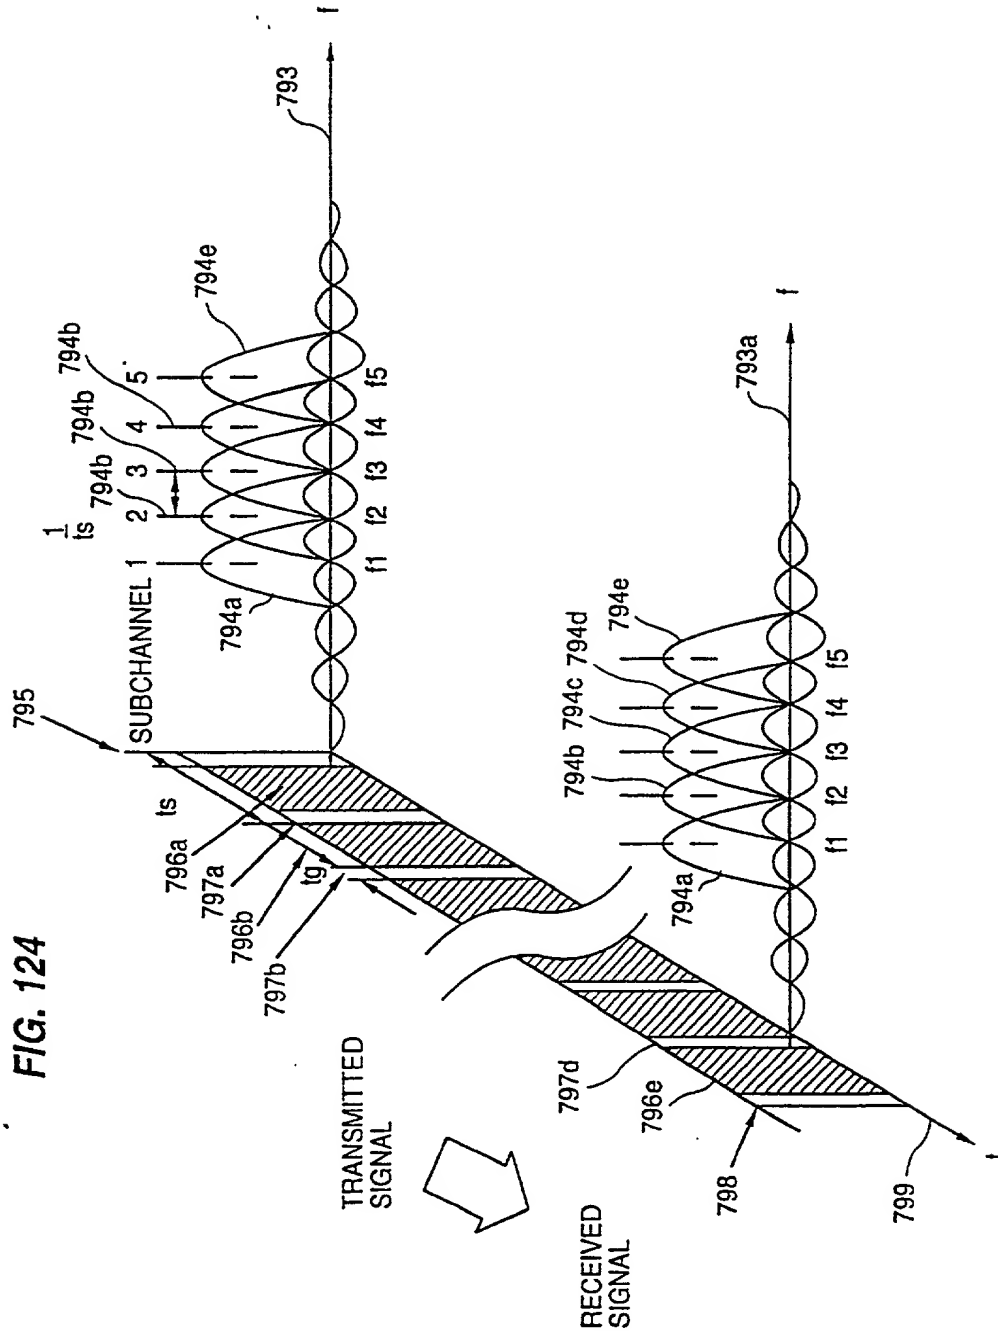


FIG. 125(a)


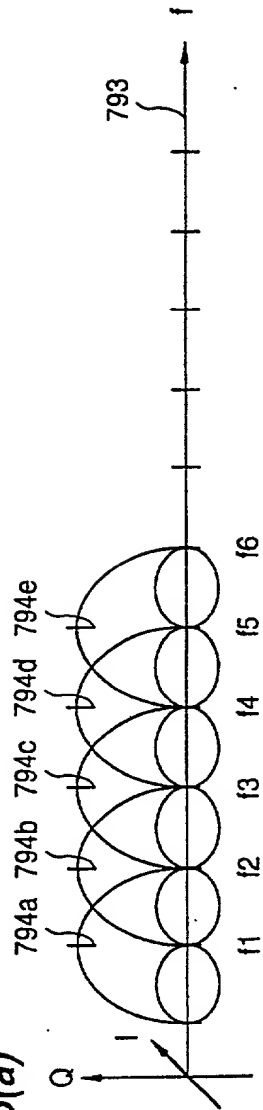


FIG. 125(b)

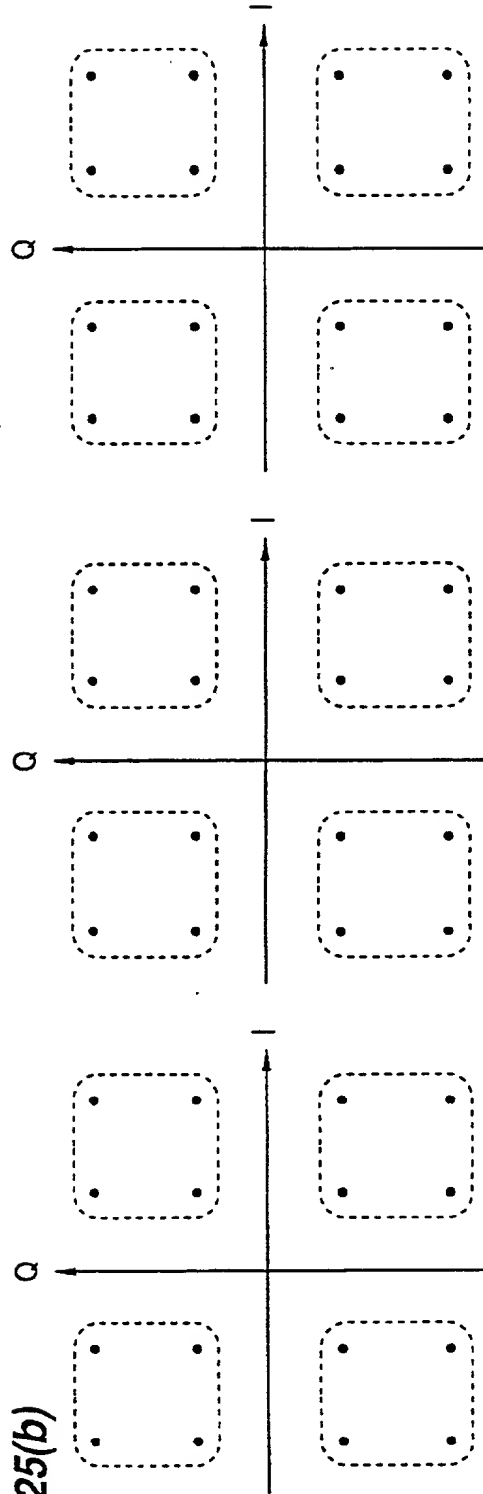

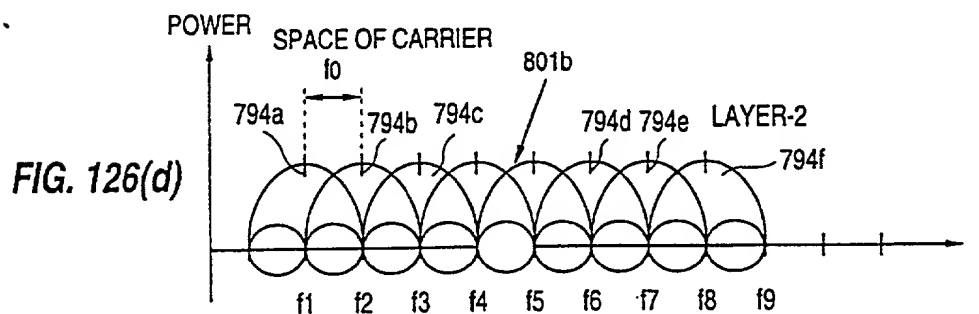
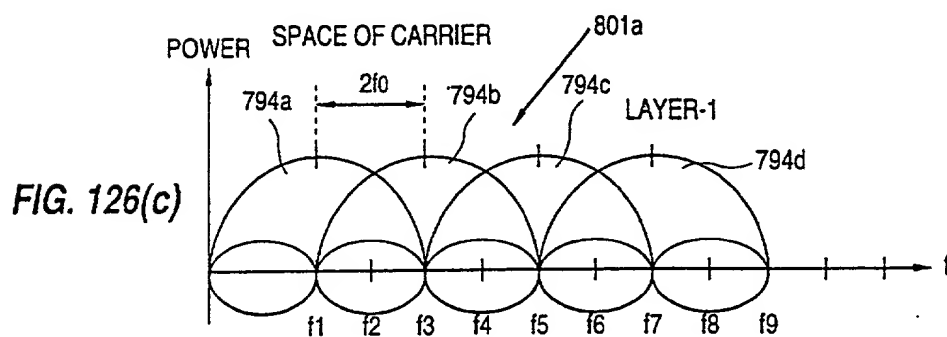
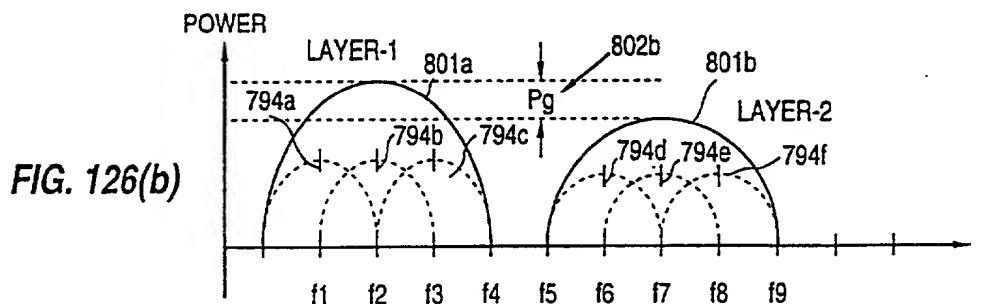
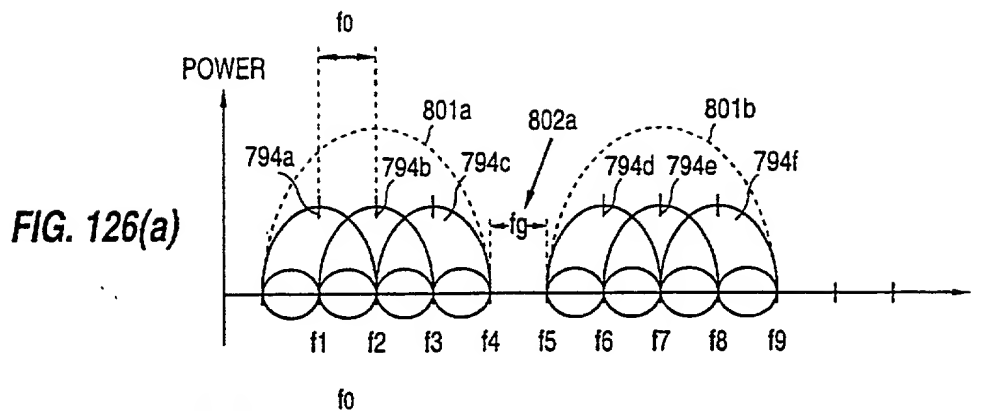


FIG. 127

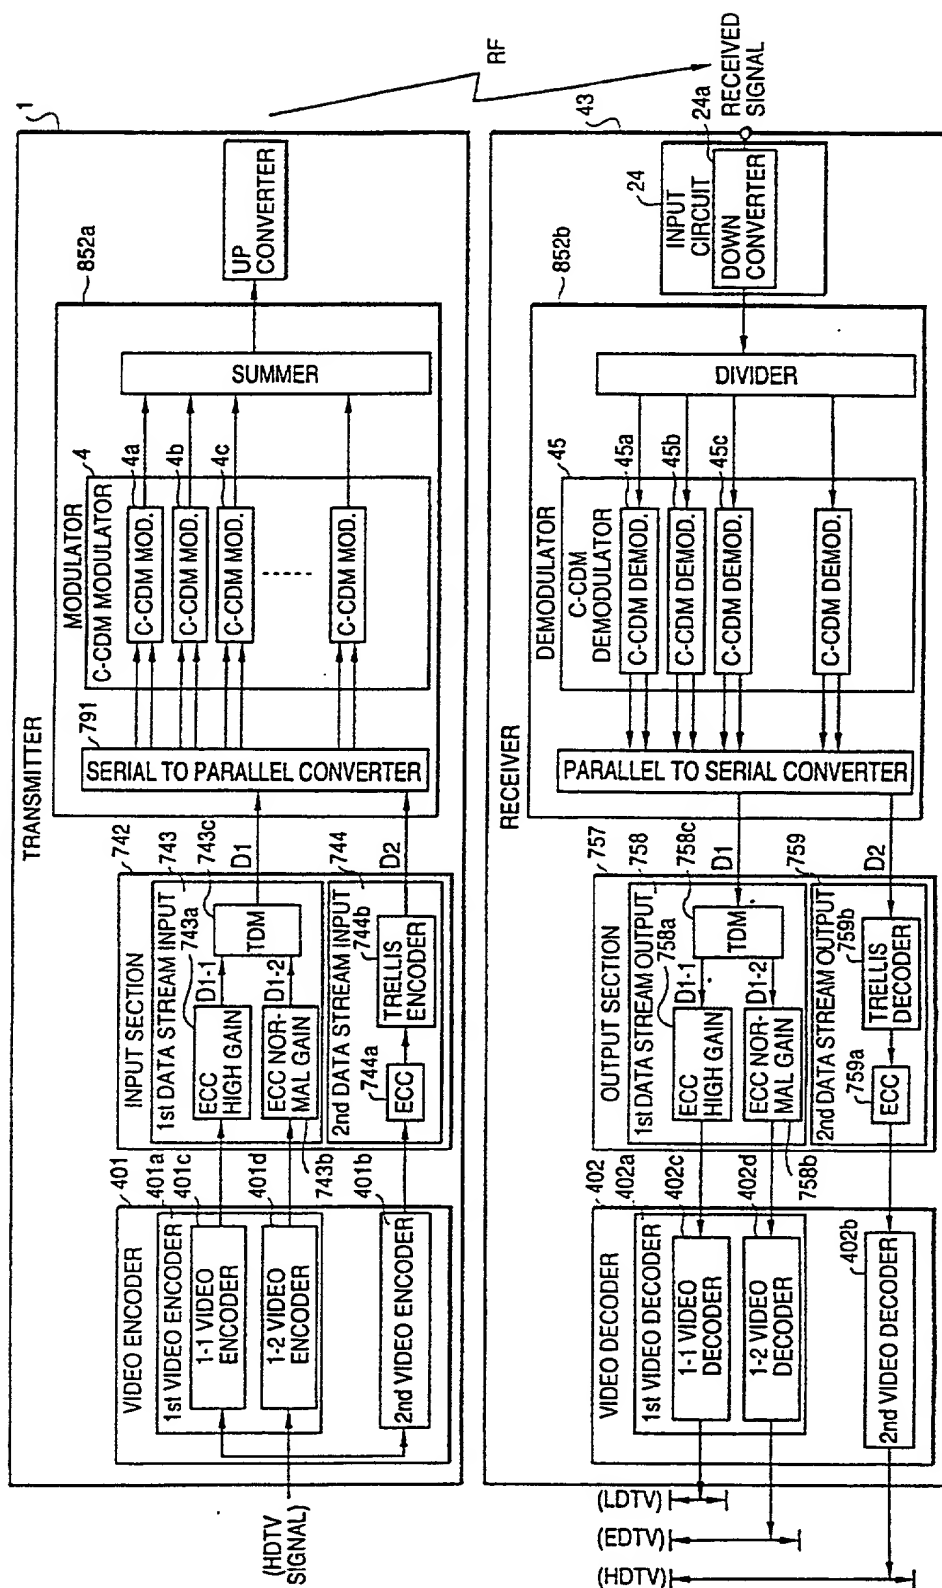


FIG. 128(a)

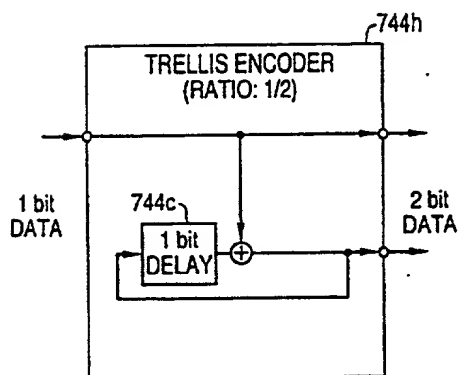


FIG. 128(d)

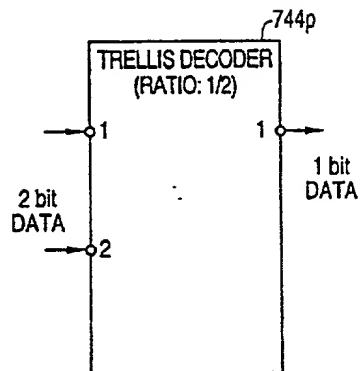


FIG. 128(b)

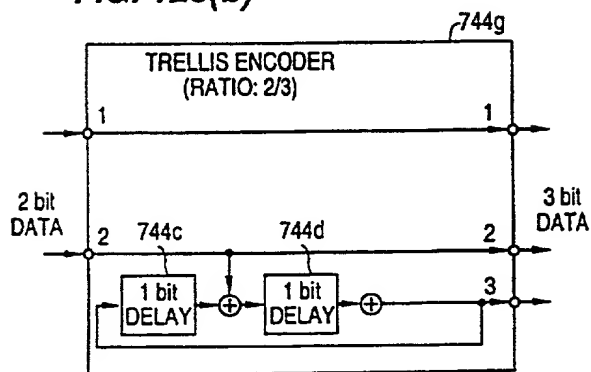


FIG. 128(e)

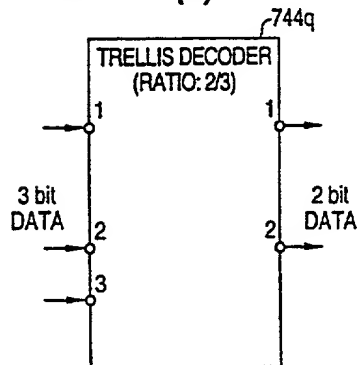


FIG. 128(c)

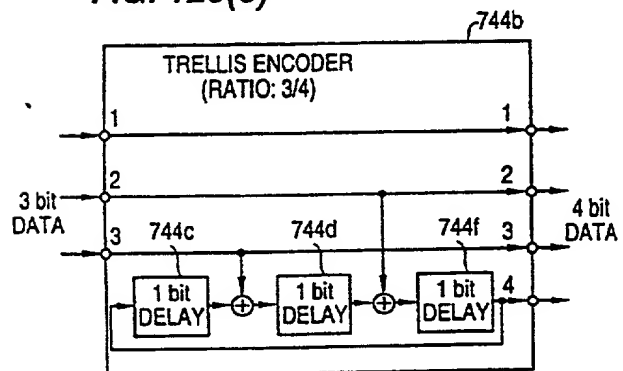


FIG. 128(f)

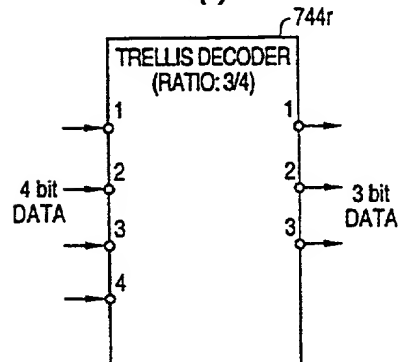


FIG. 129

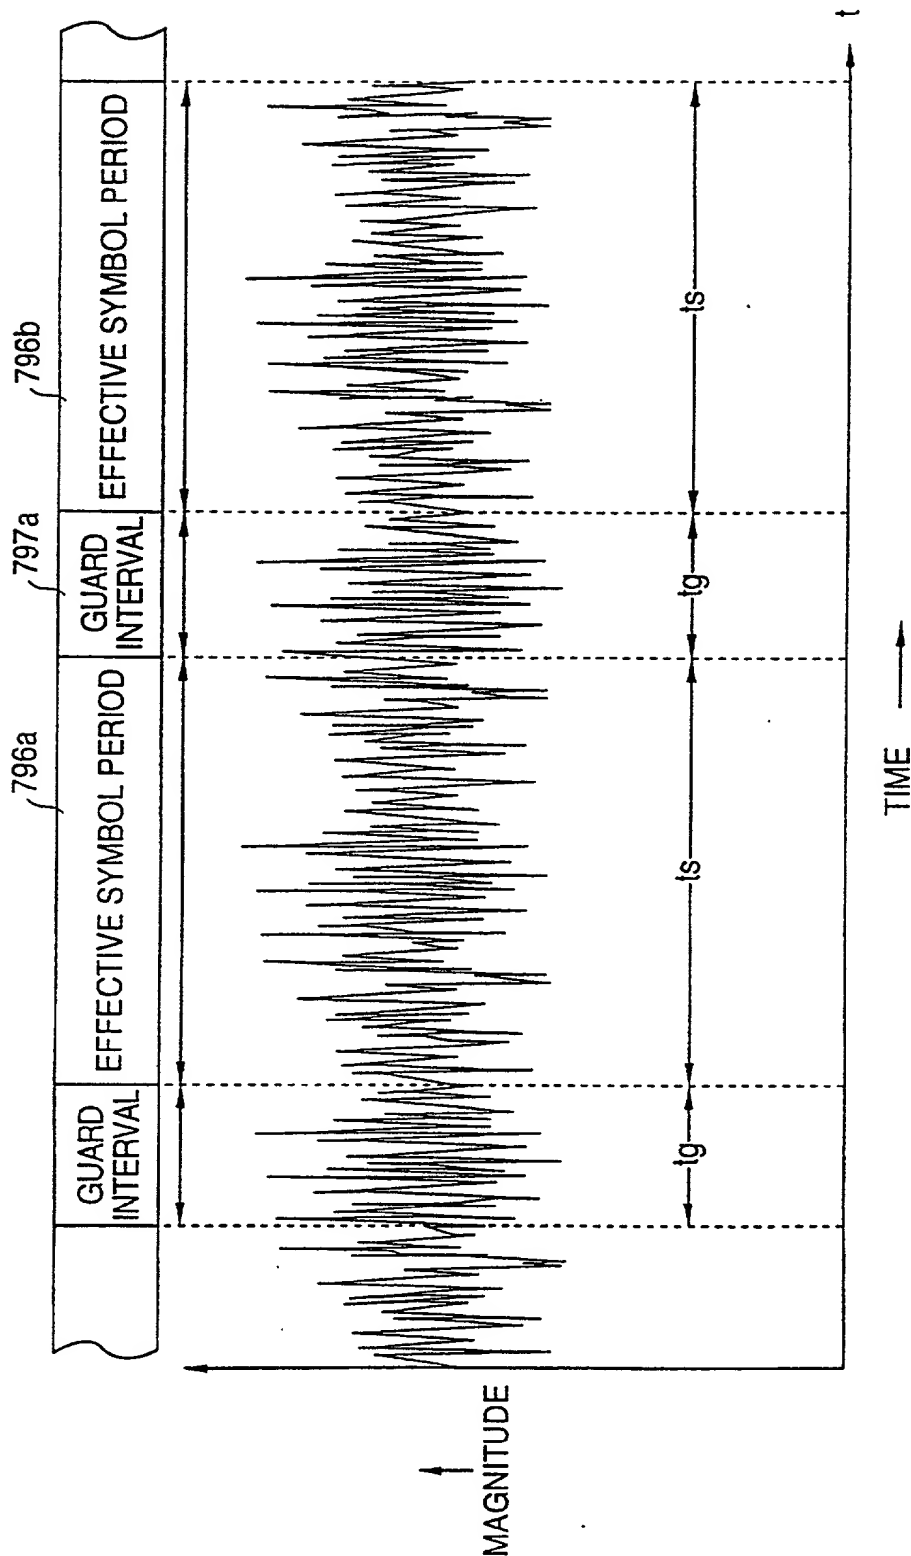


FIG. 130


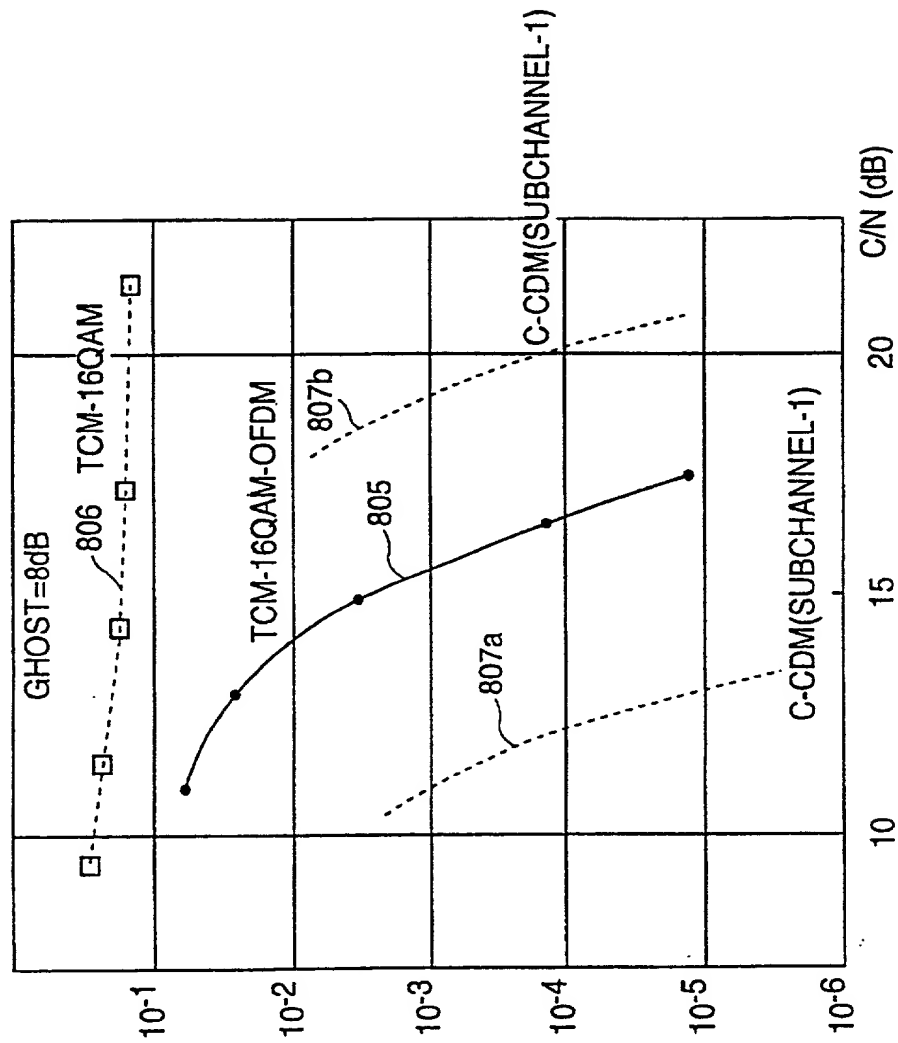


FIG. 131

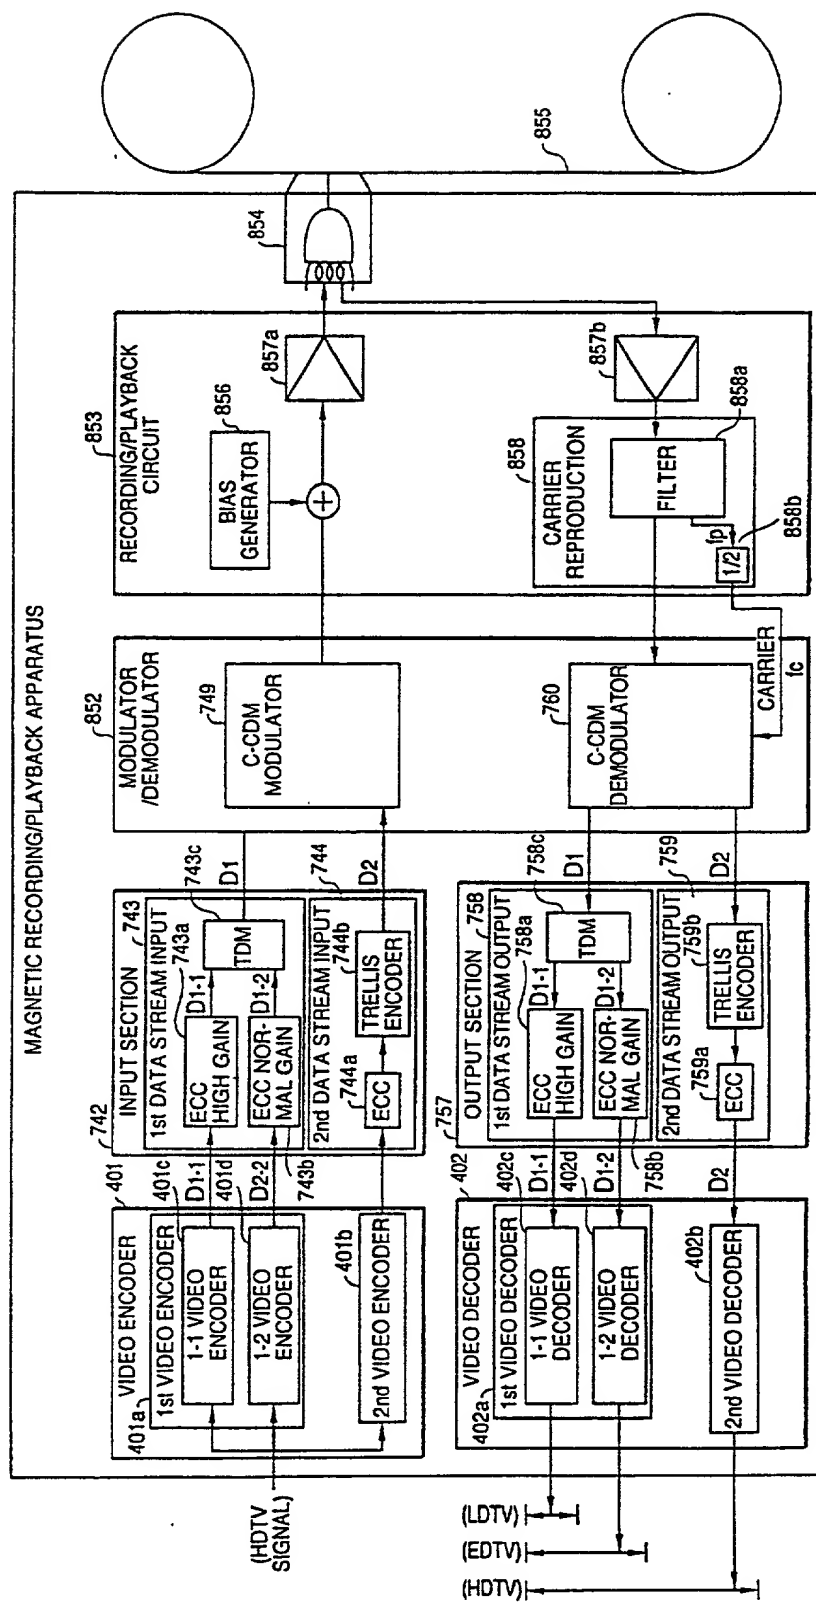

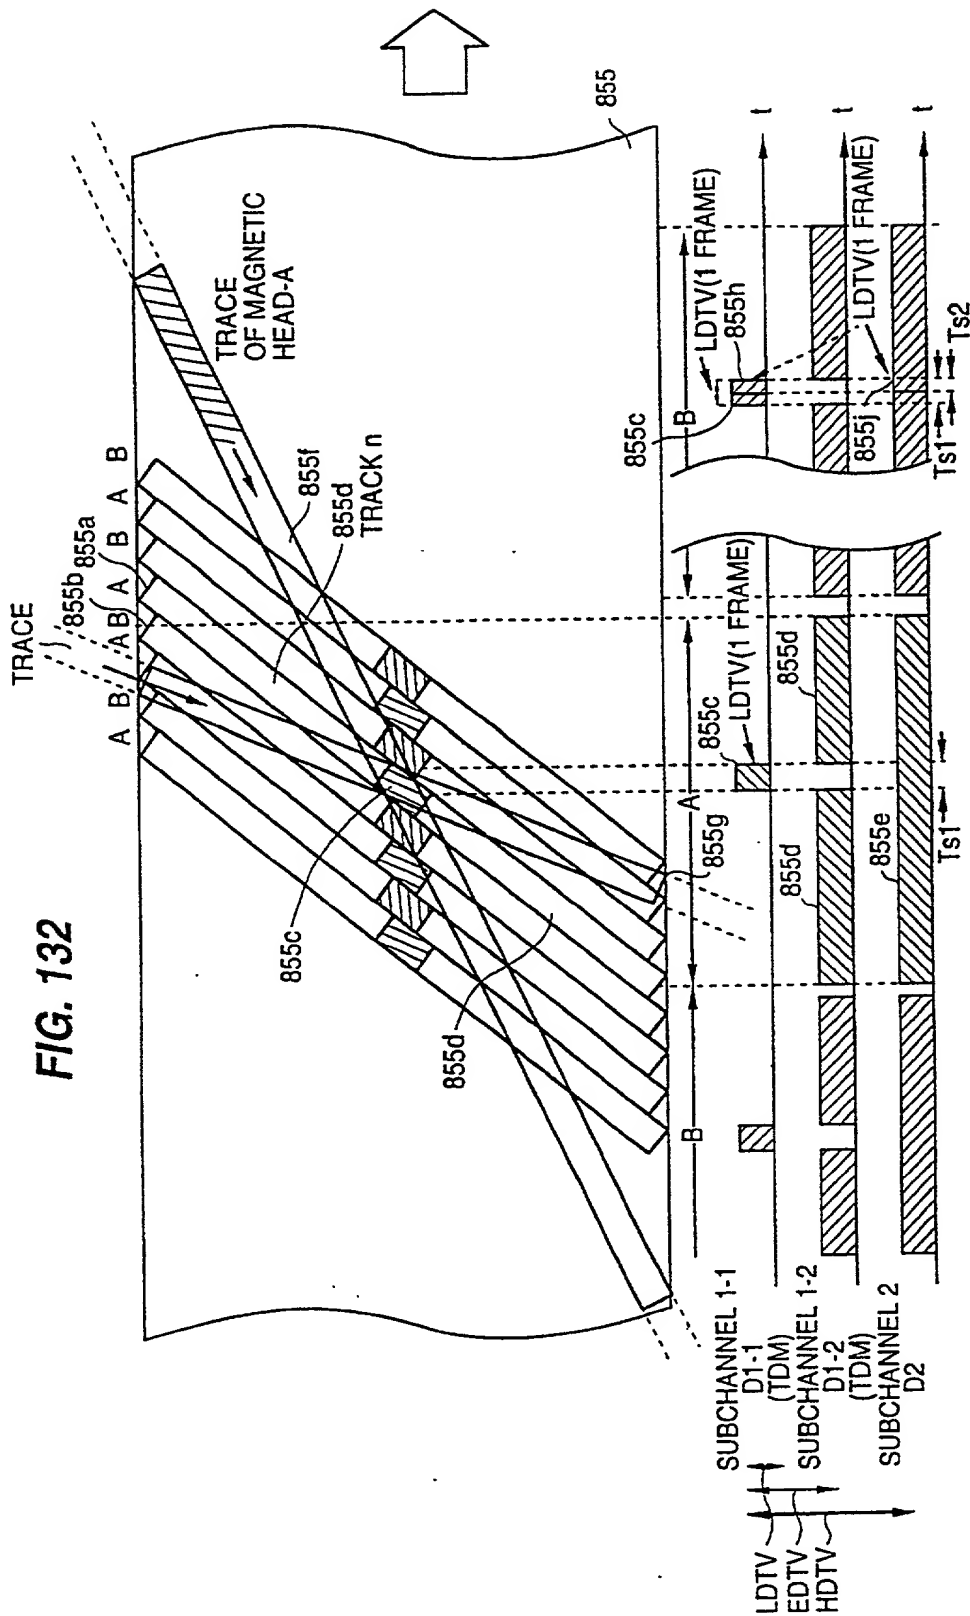


FIG. 133

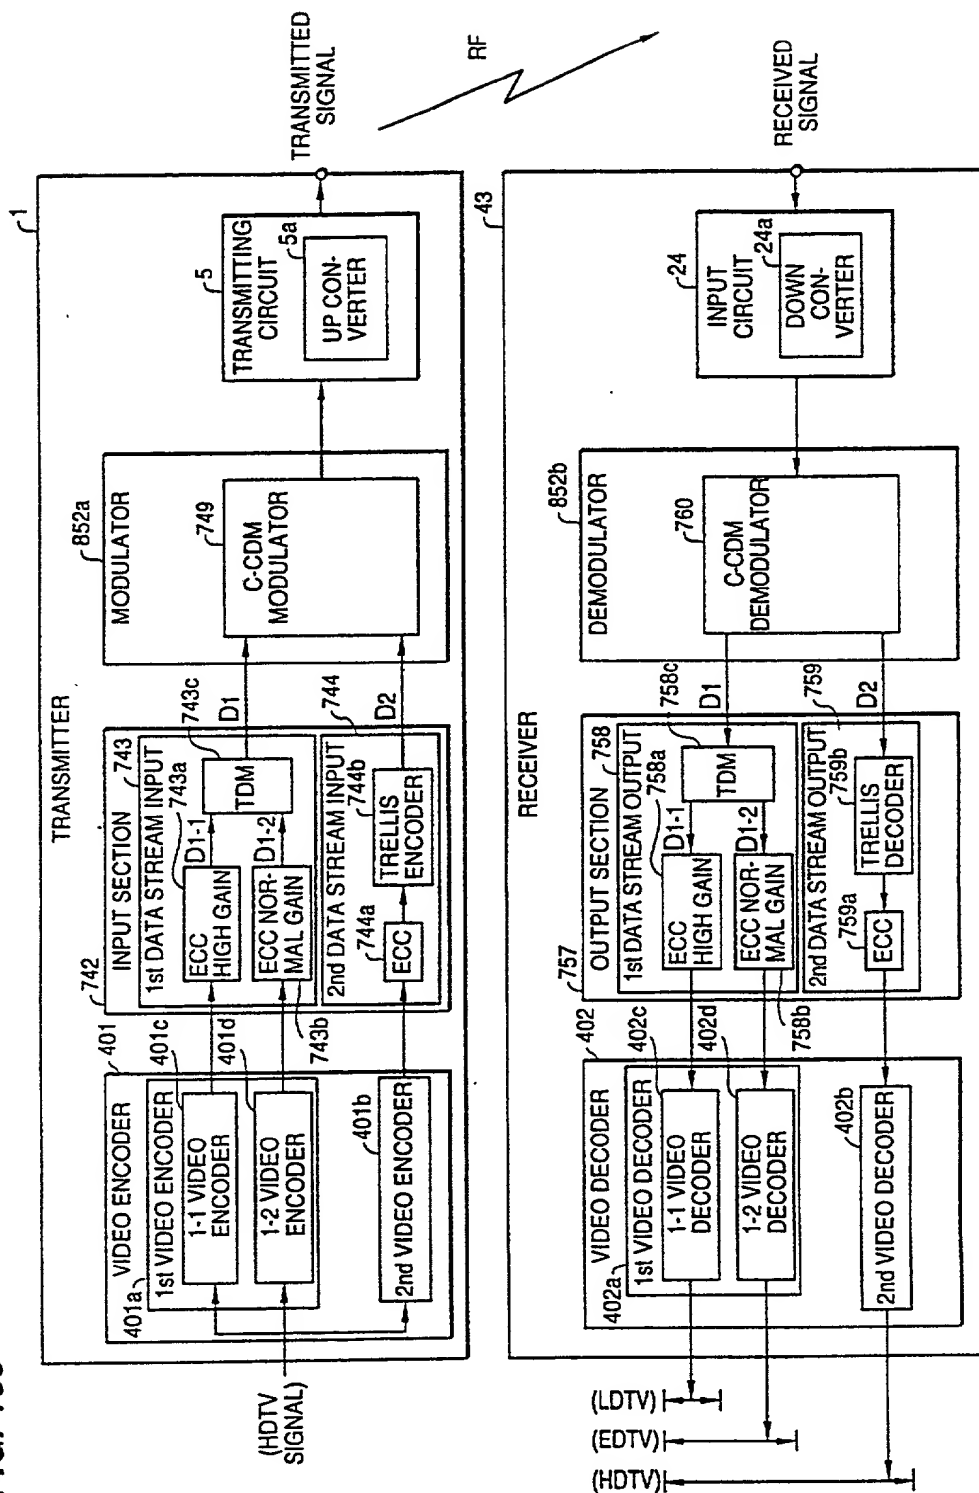


FIG. 134

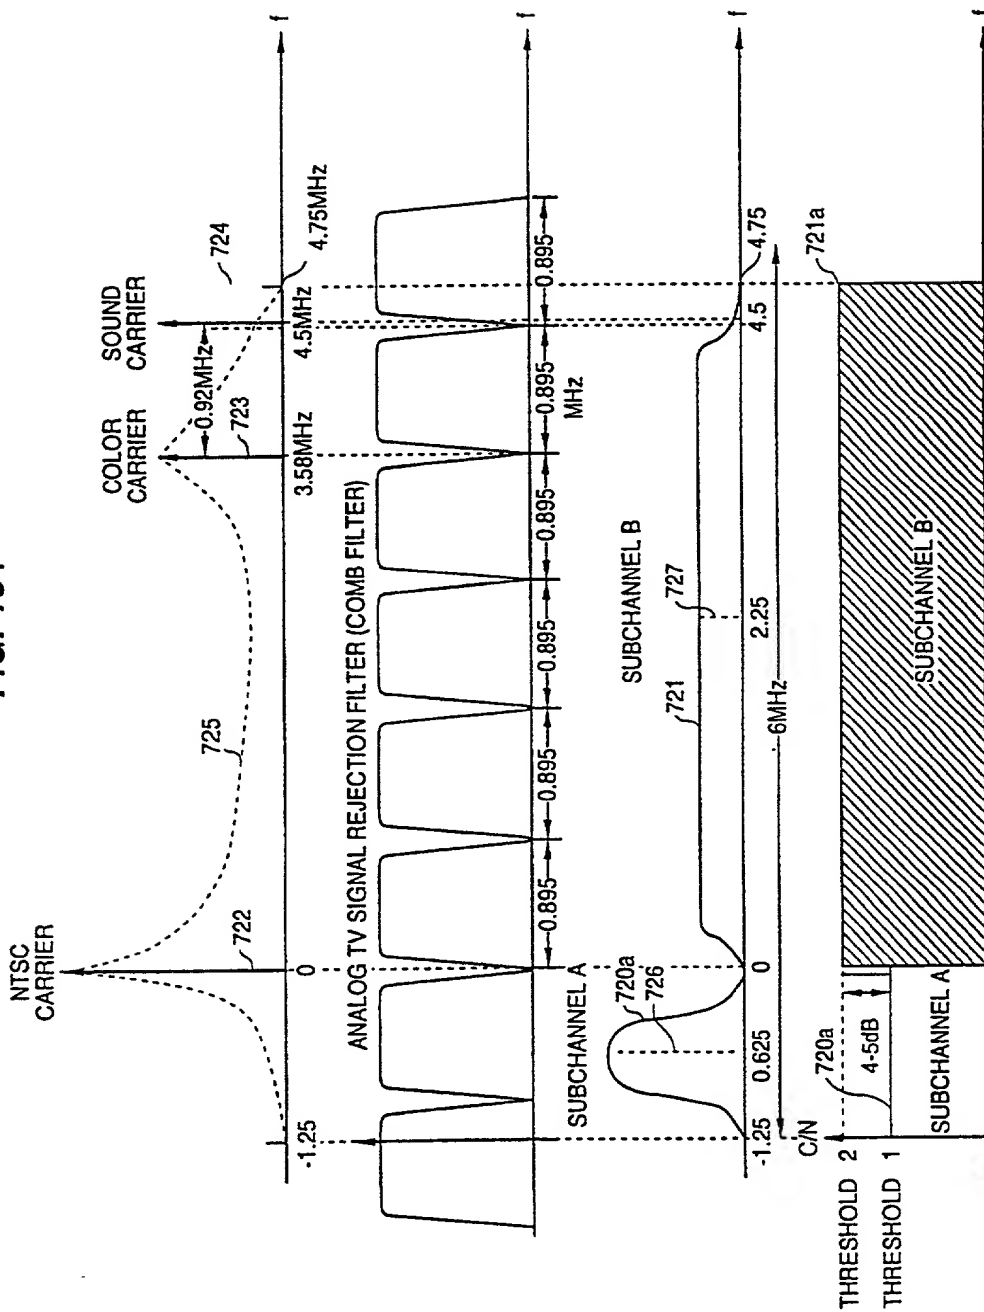


FIG. 135

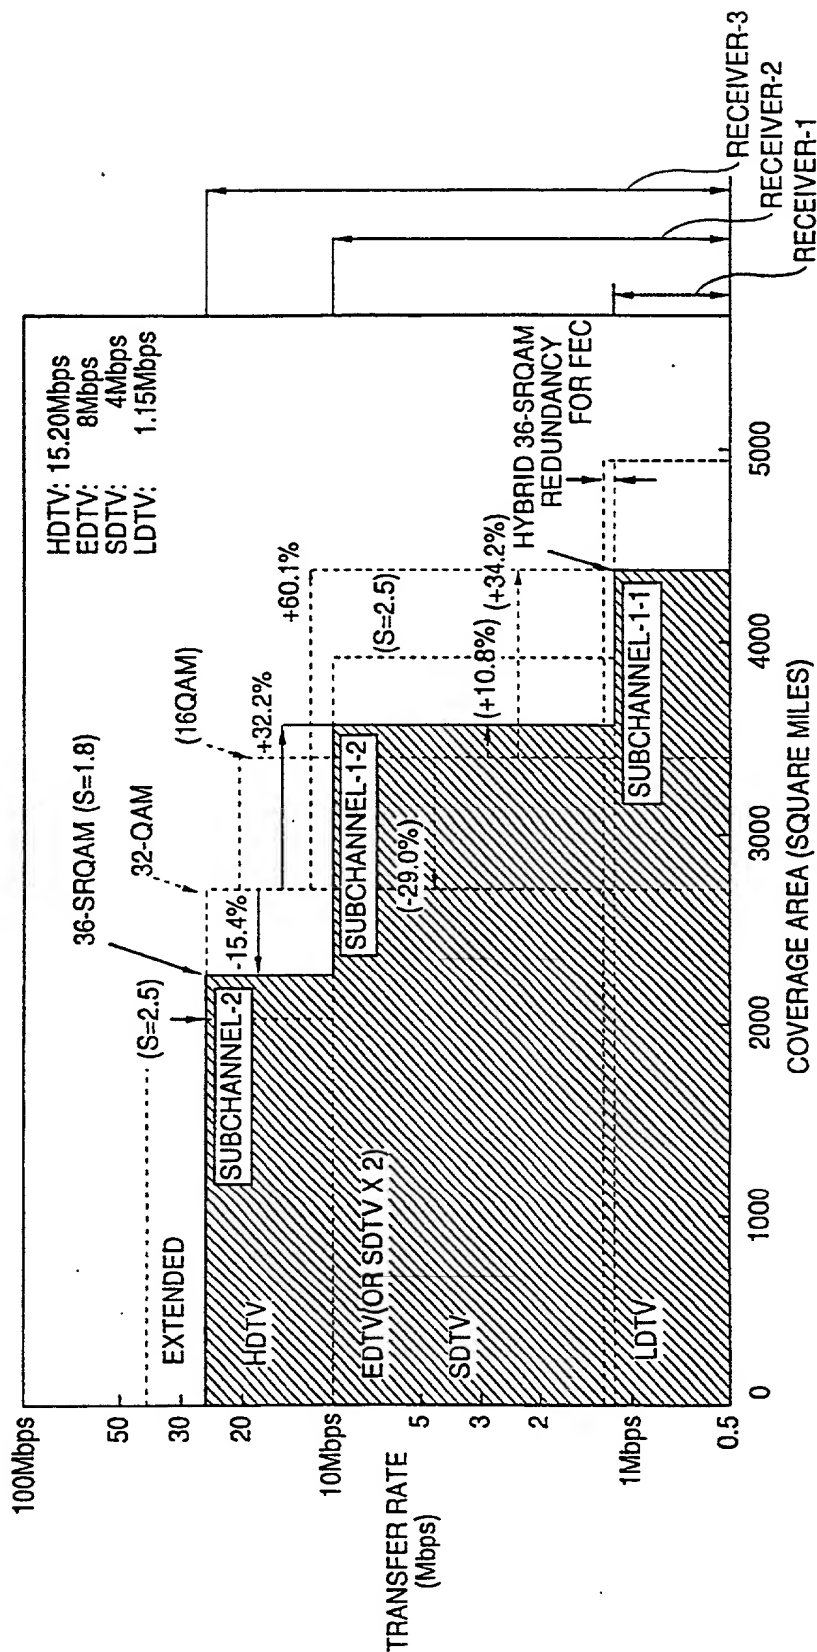


FIG. 136

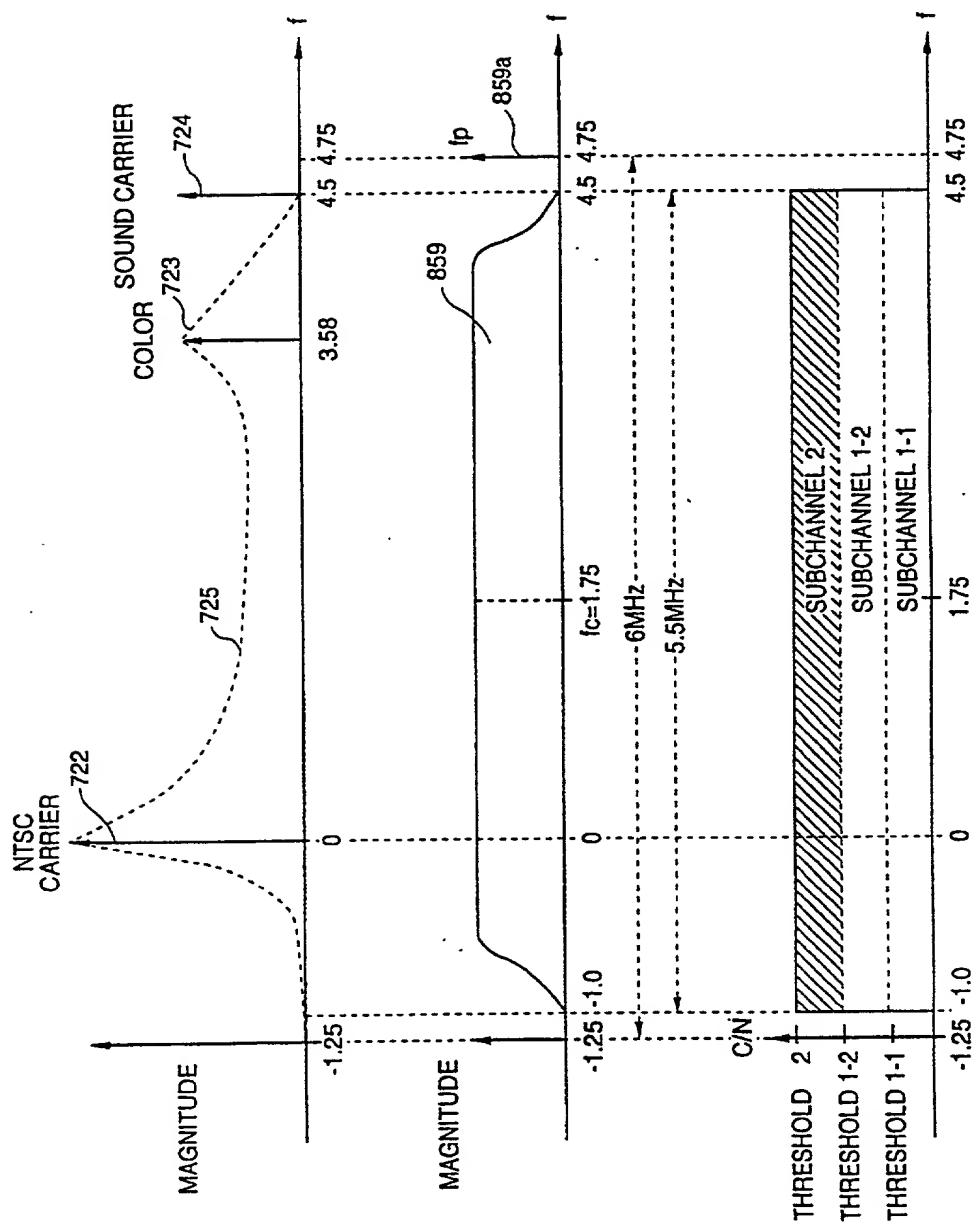


FIG. 137

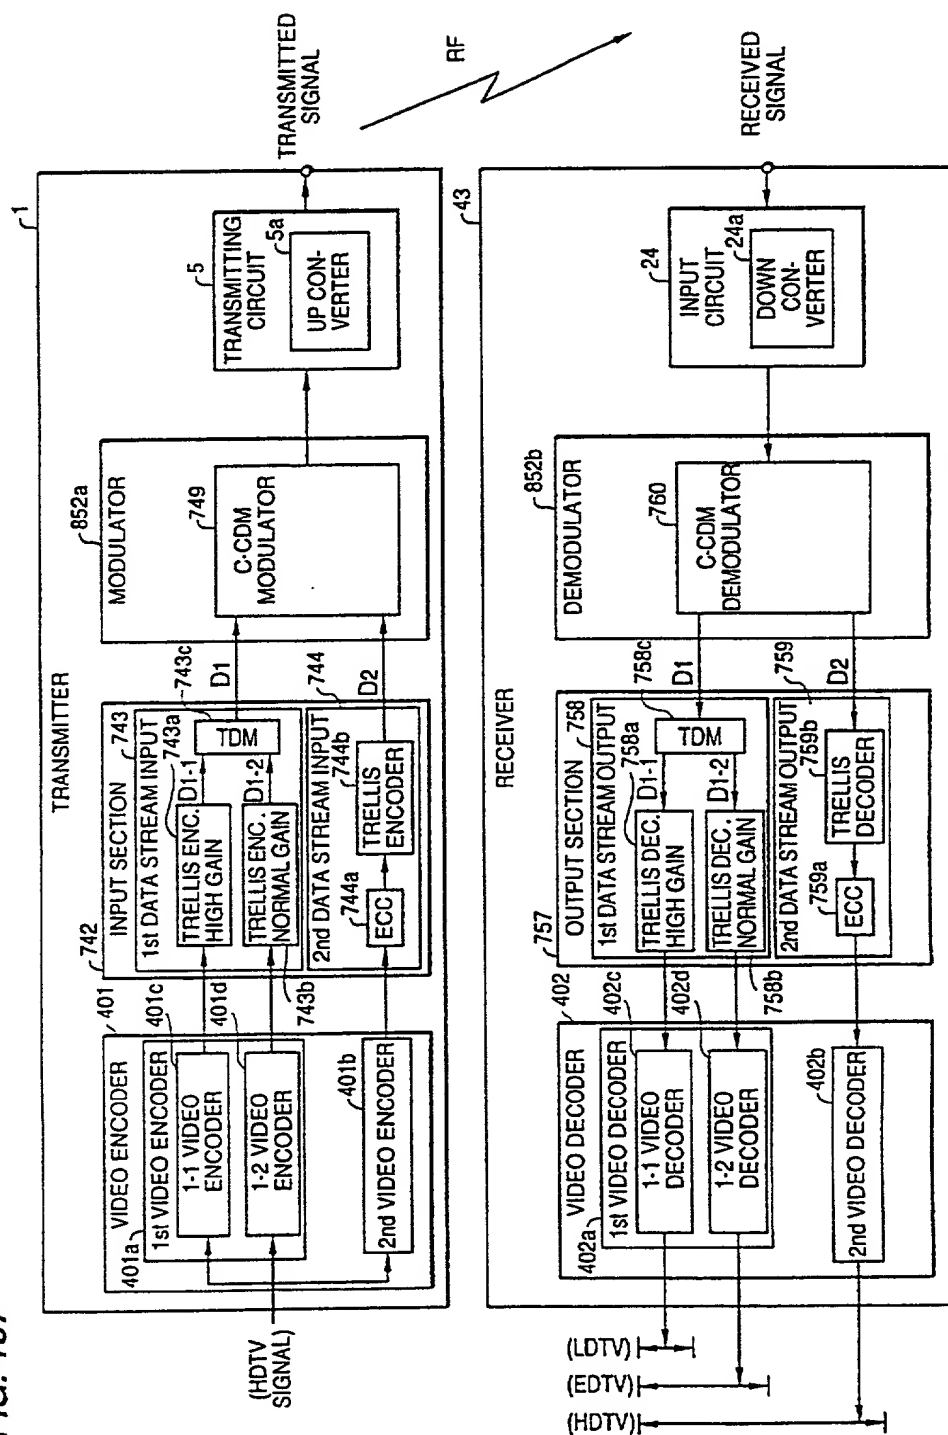


FIG. 138

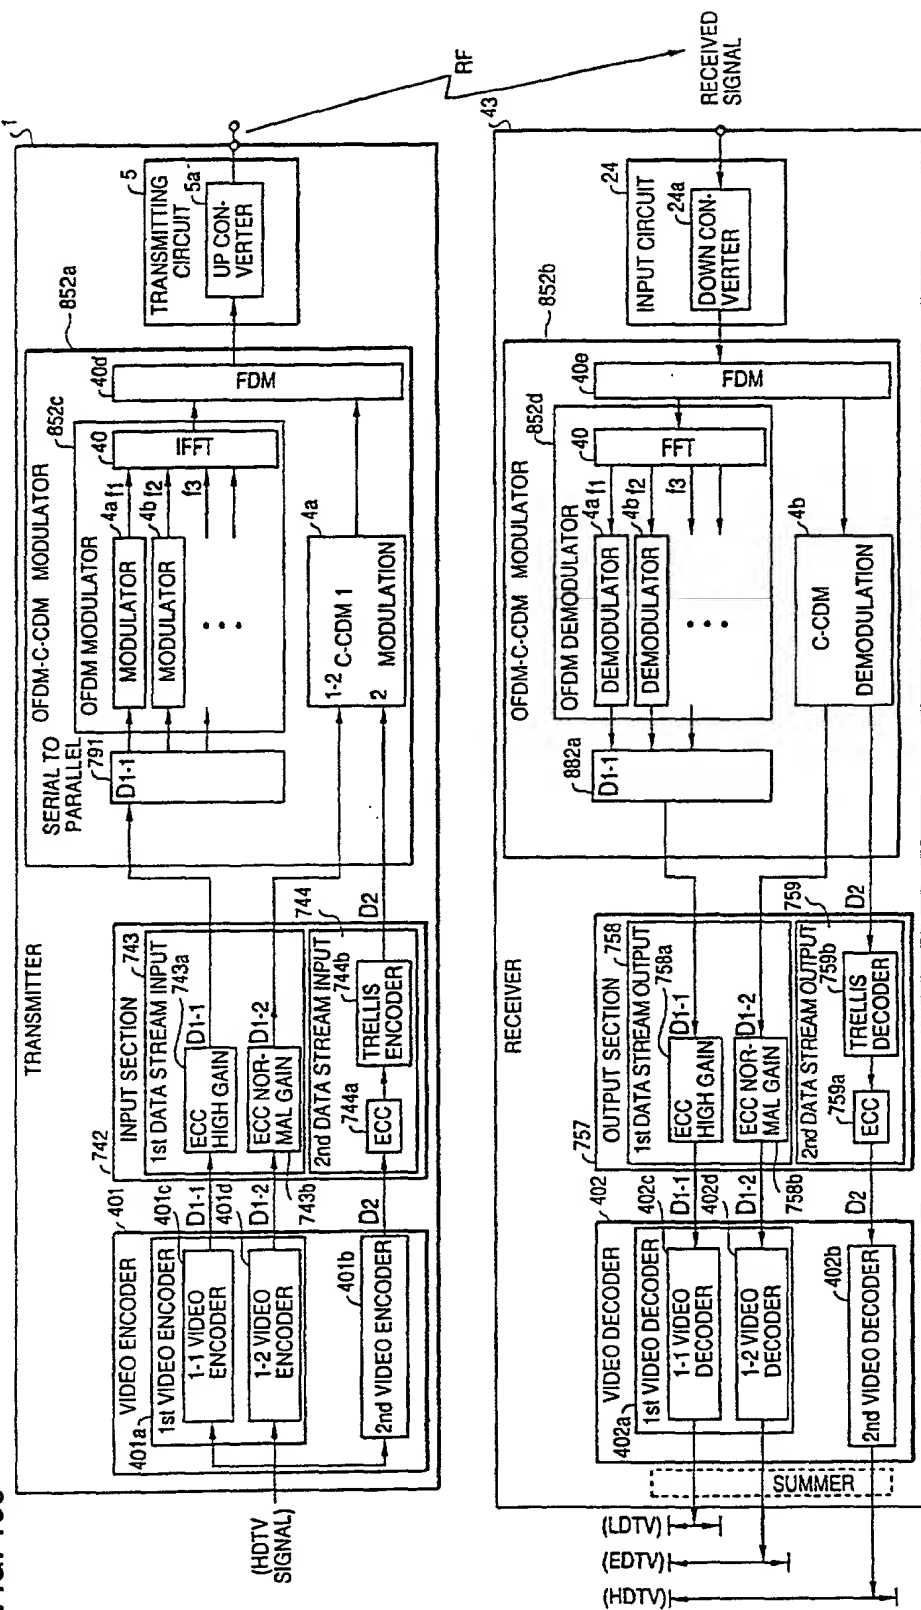


FIG. 139

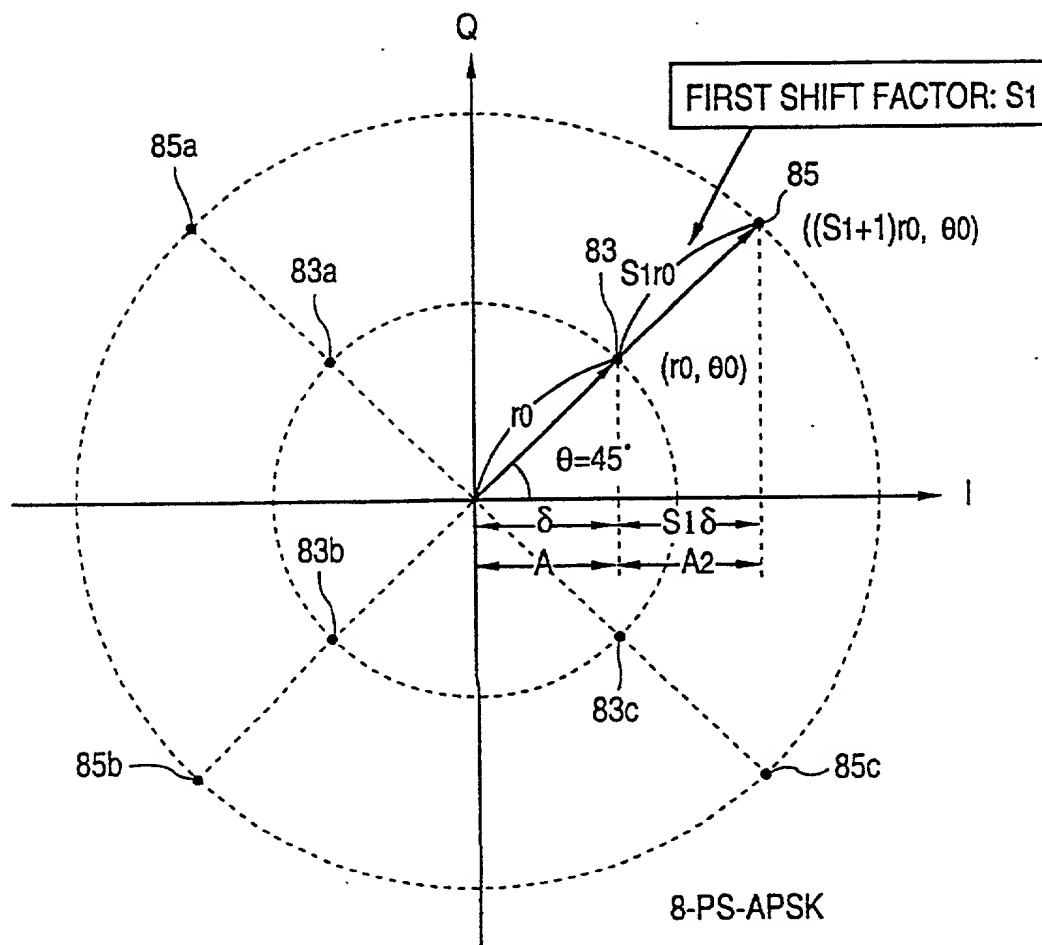


FIG. 140

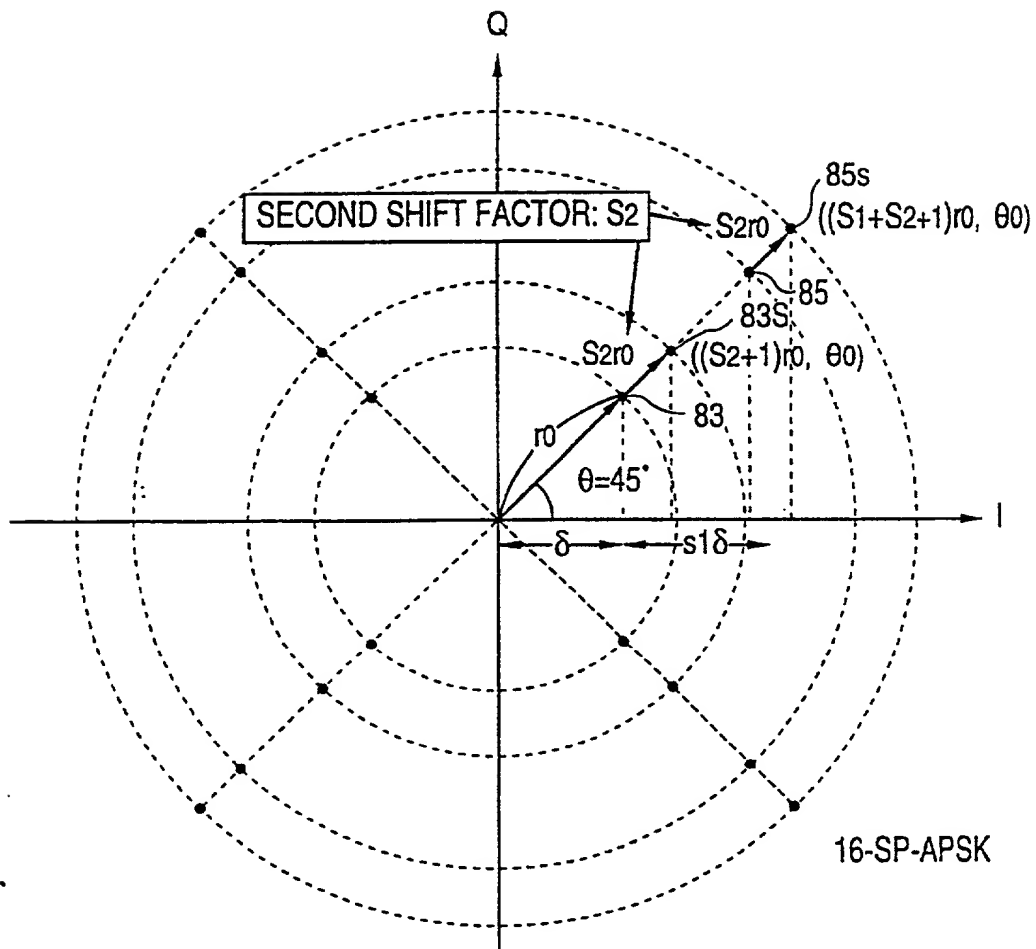


FIG. 141

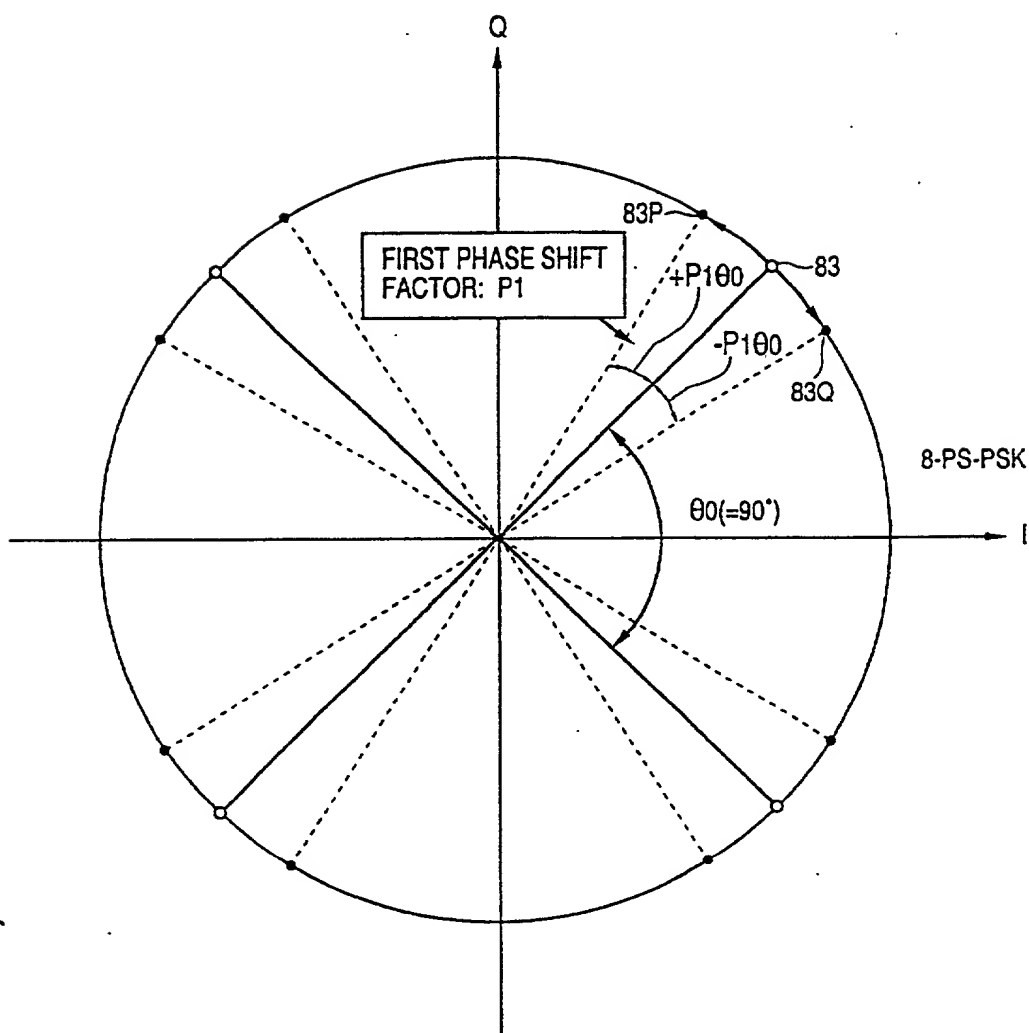


FIG. 142

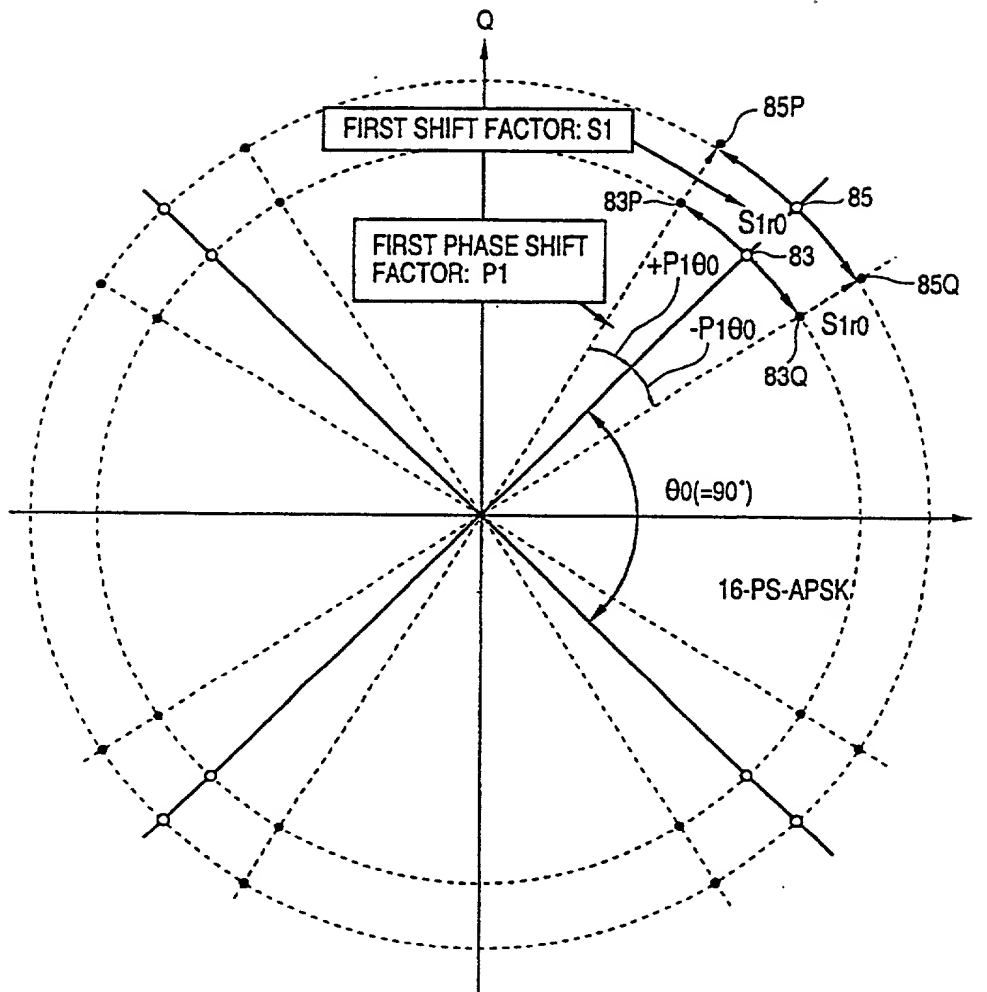


FIG. 143

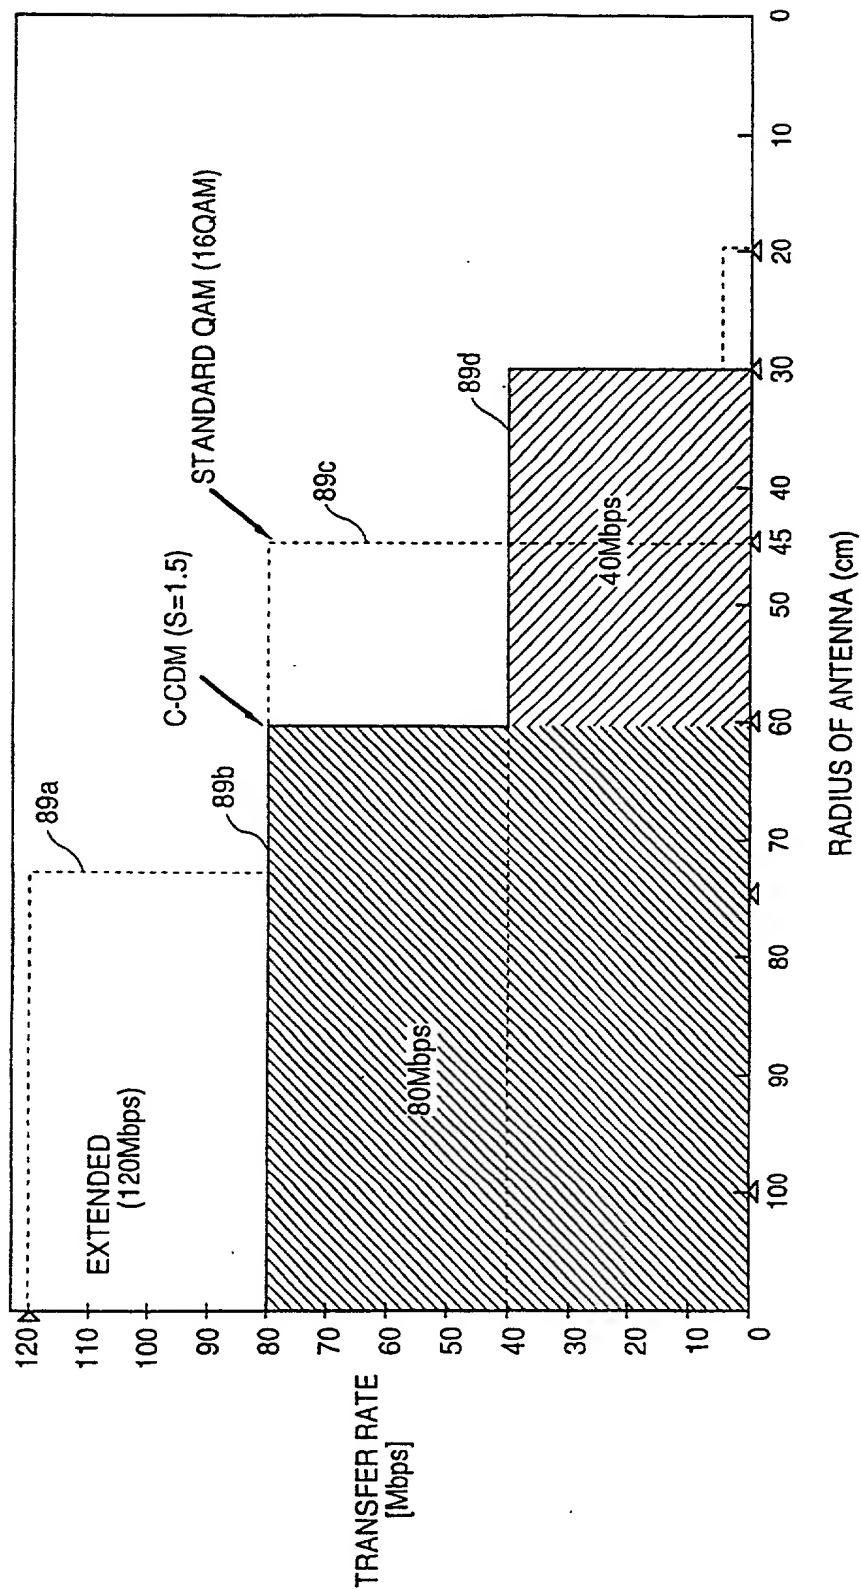


FIG. 144

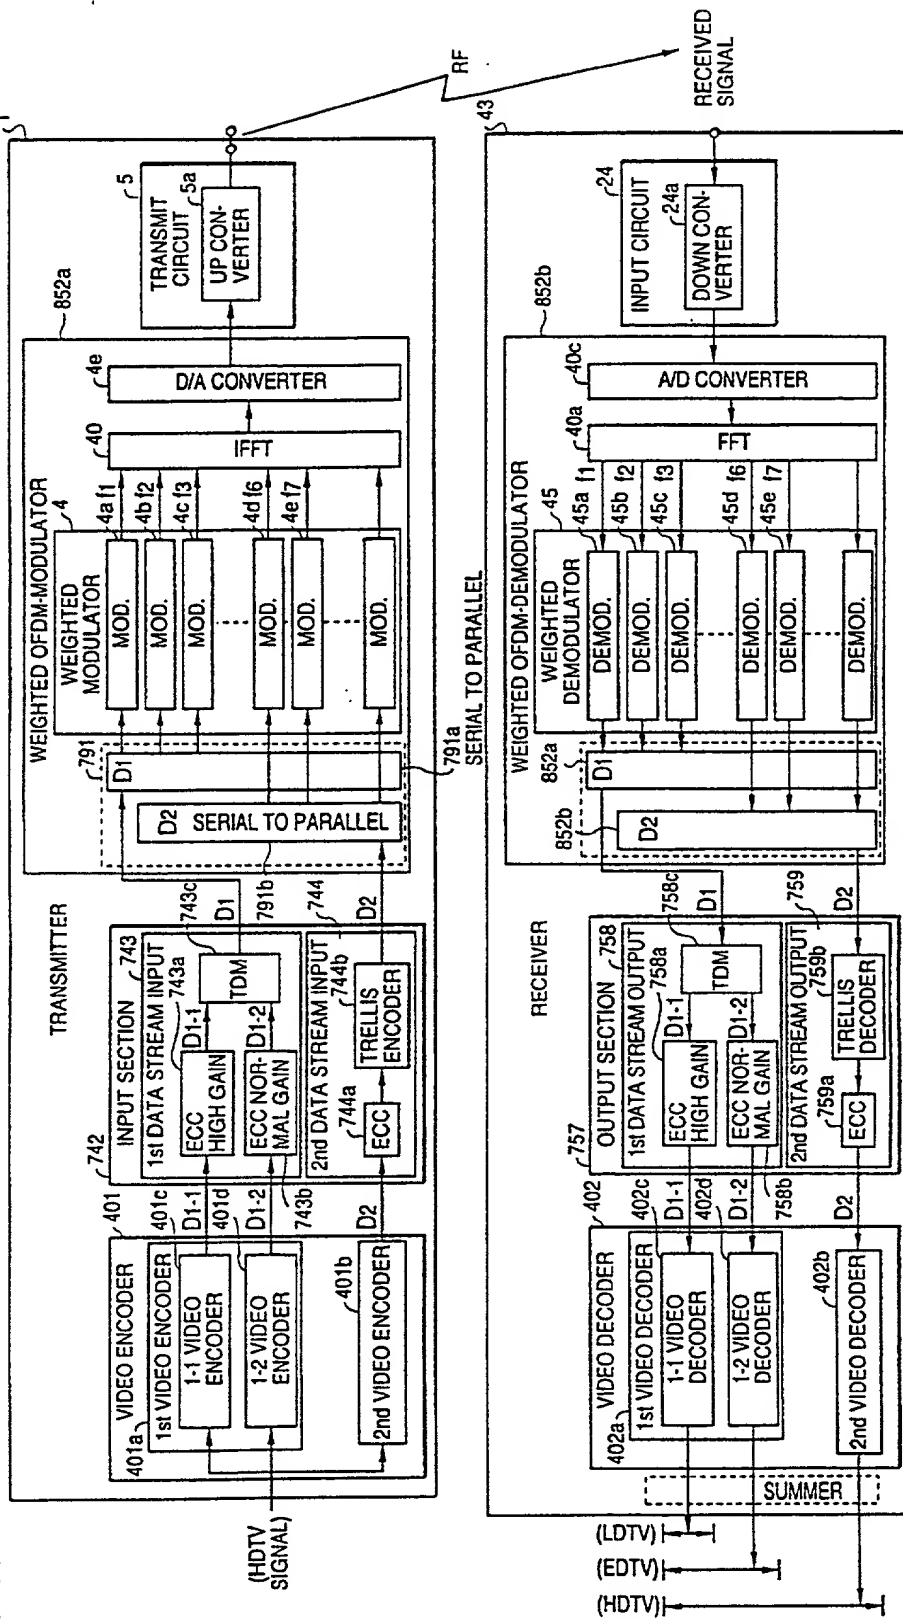


FIG. 145(a)

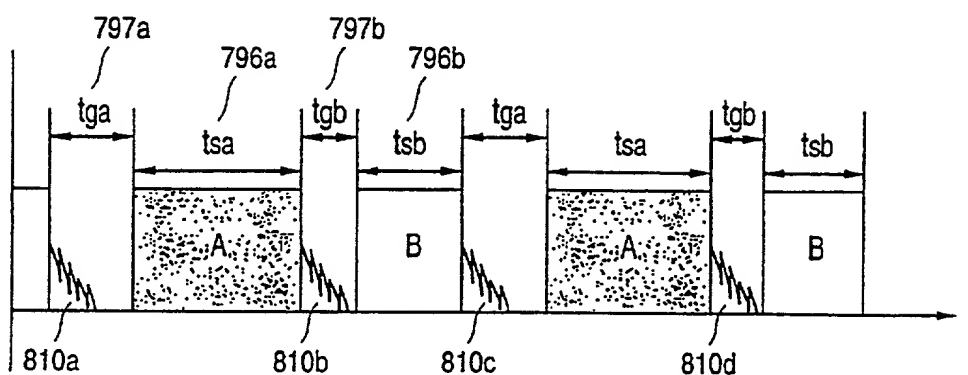


FIG. 145(b)

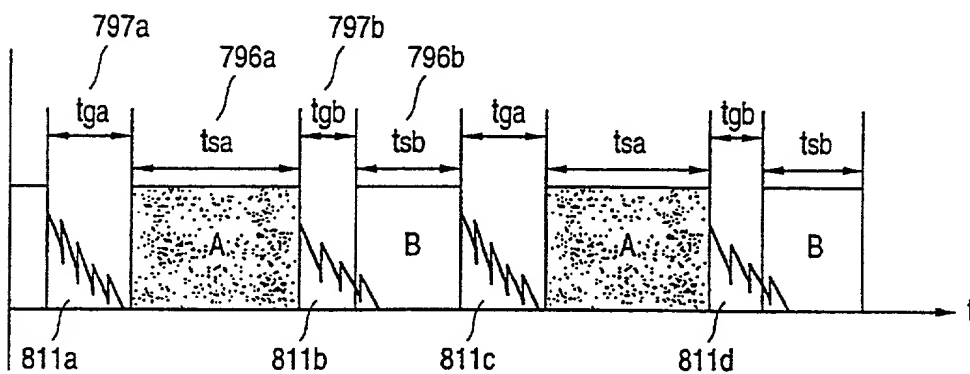


FIG. 146

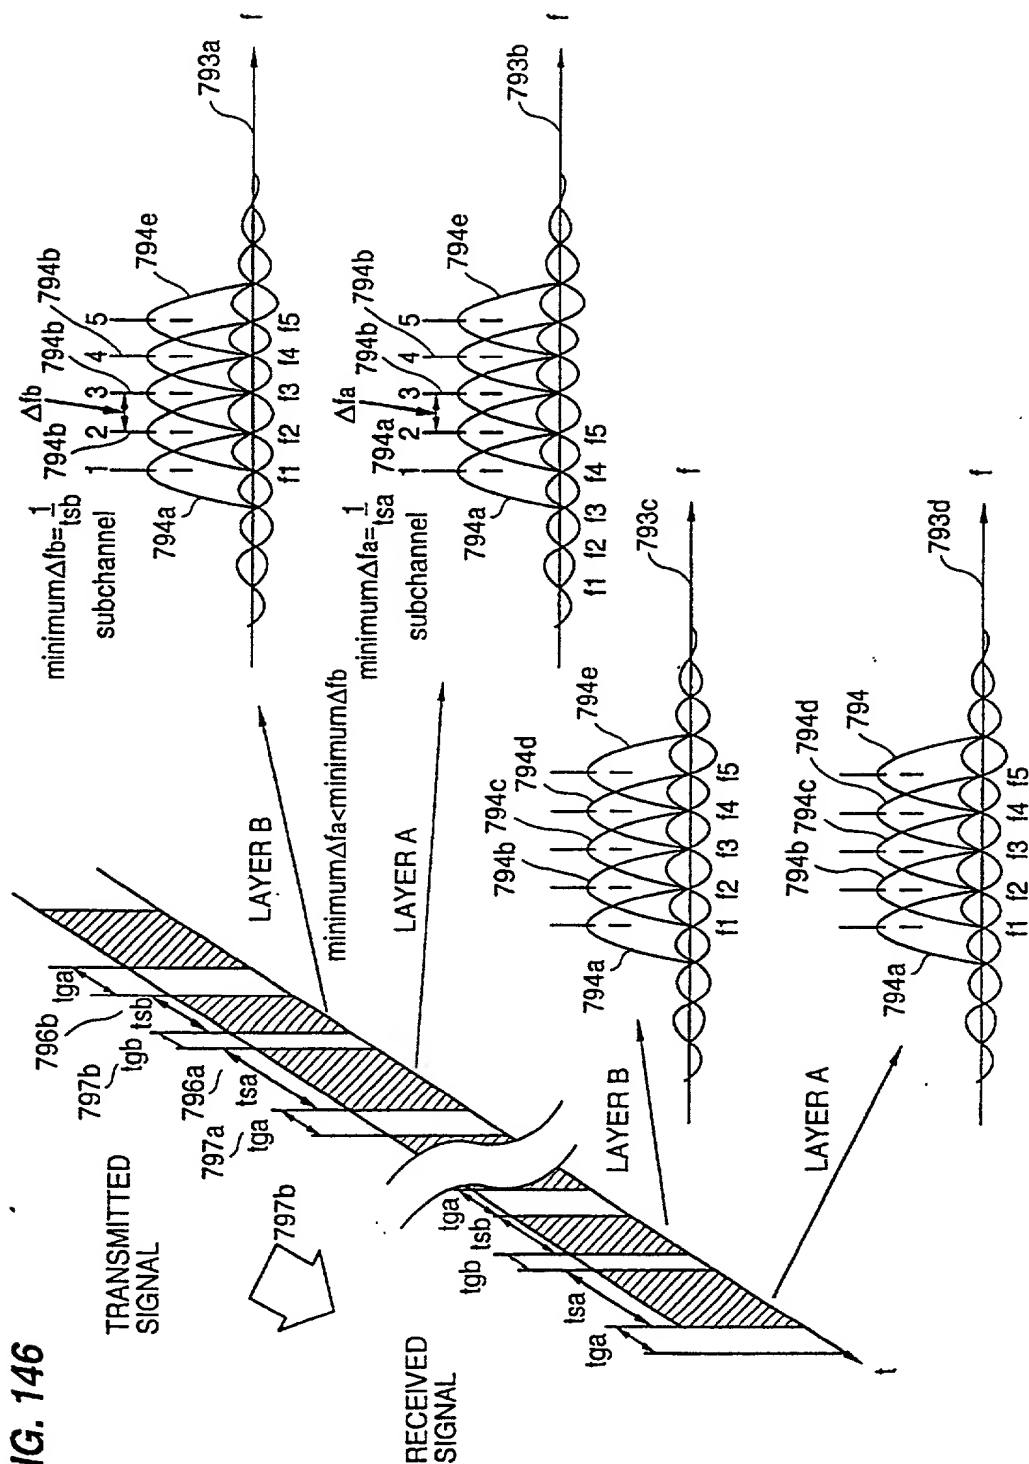


FIG. 147


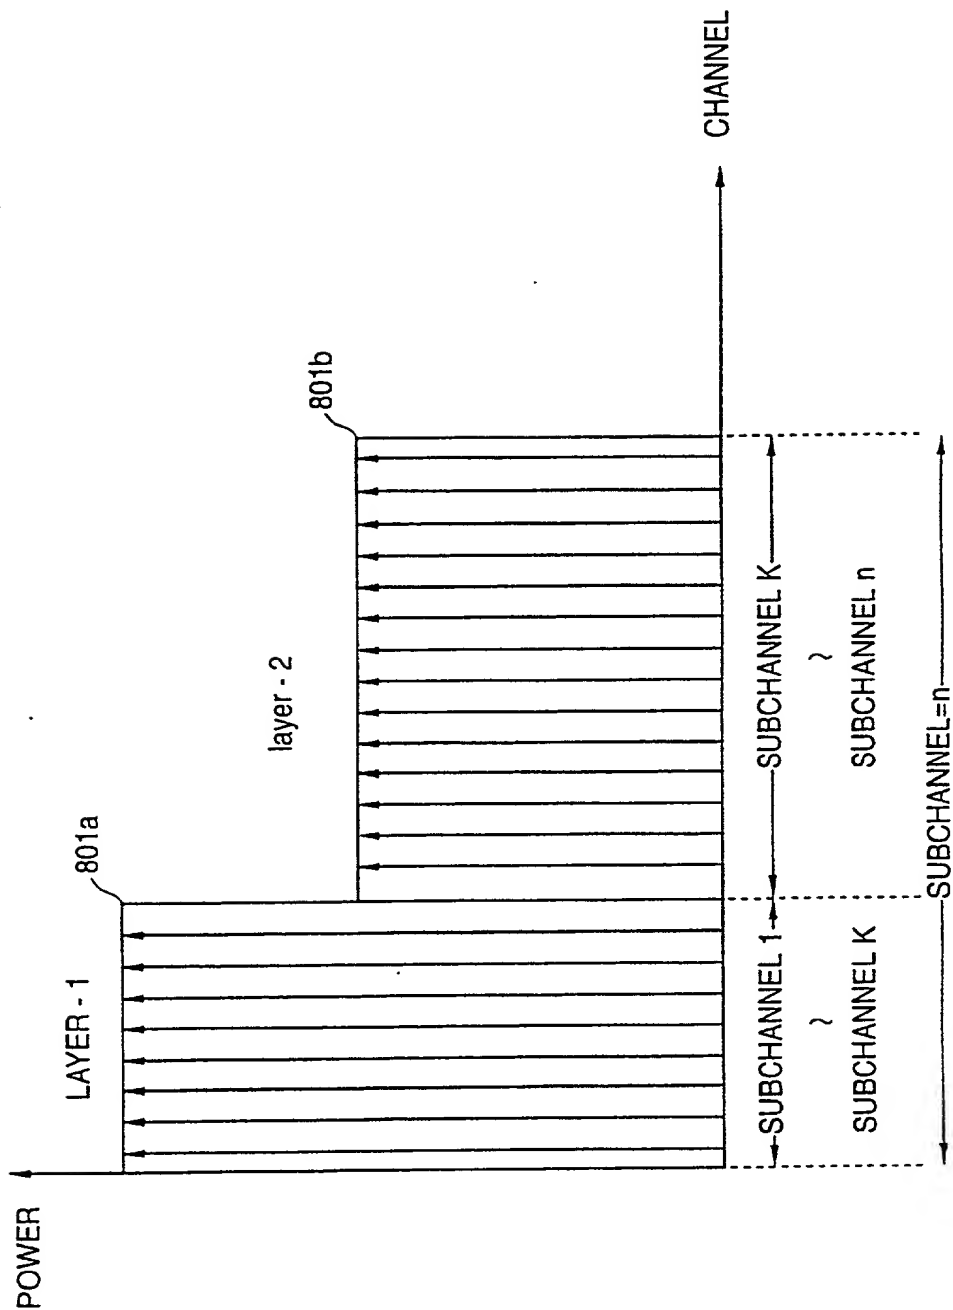


FIG. 148

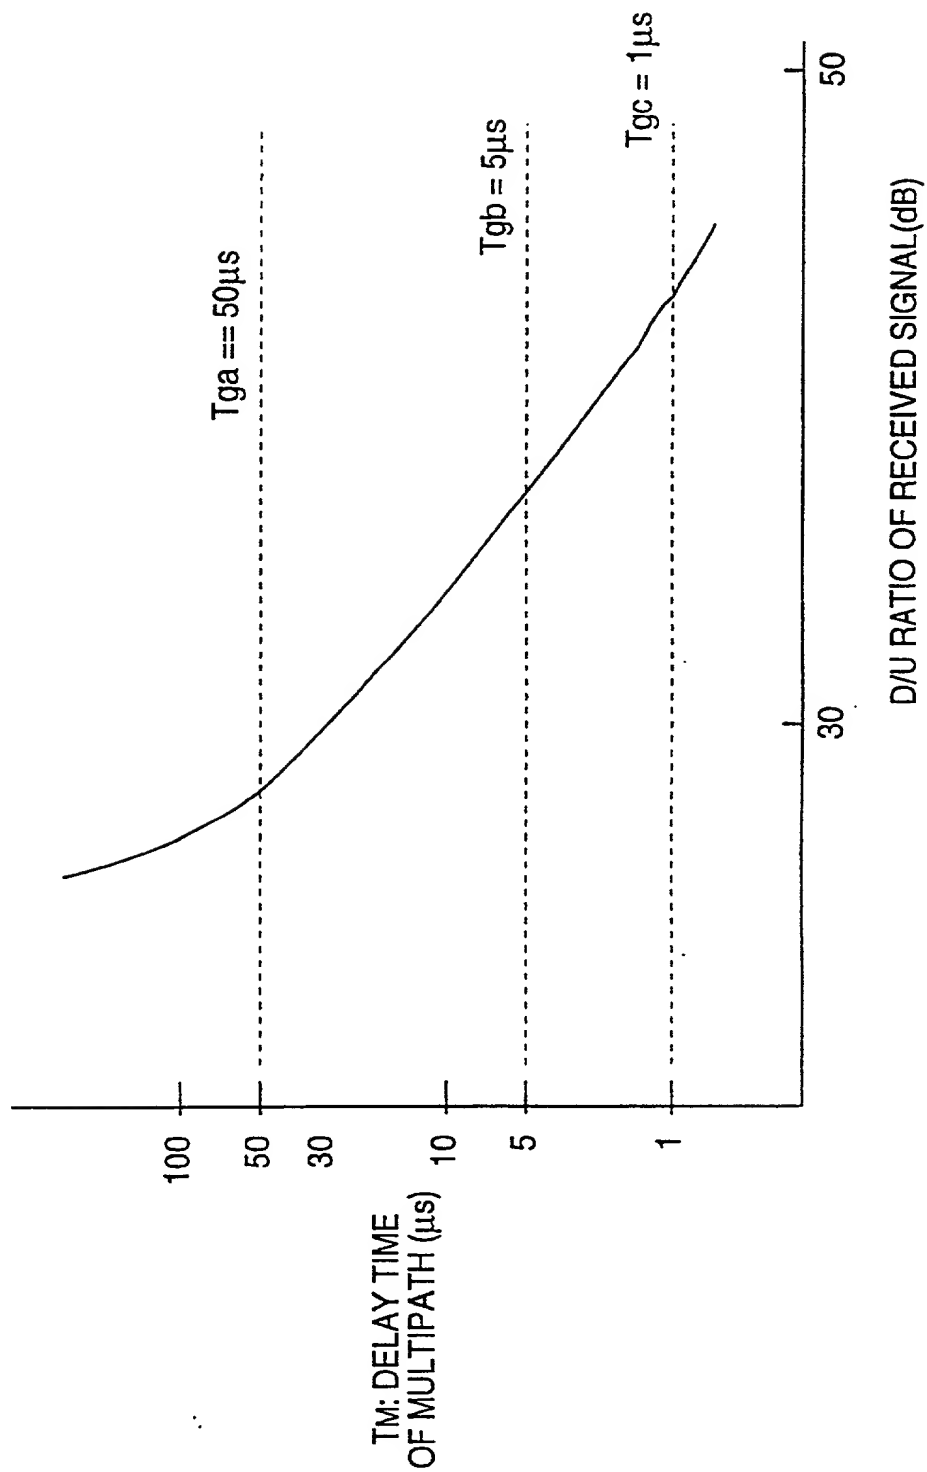

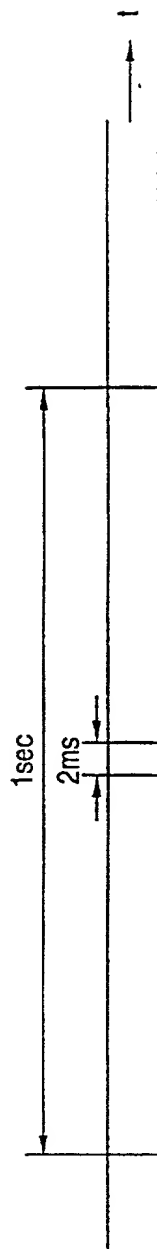
[illegible]

FIG. 149(a)

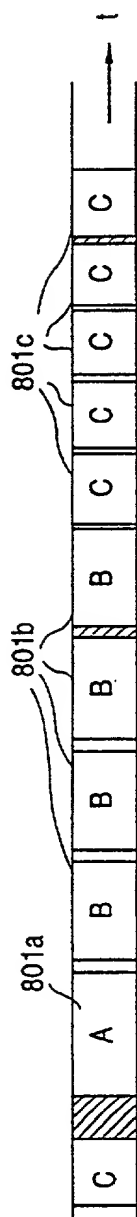


FIG. 149(b)

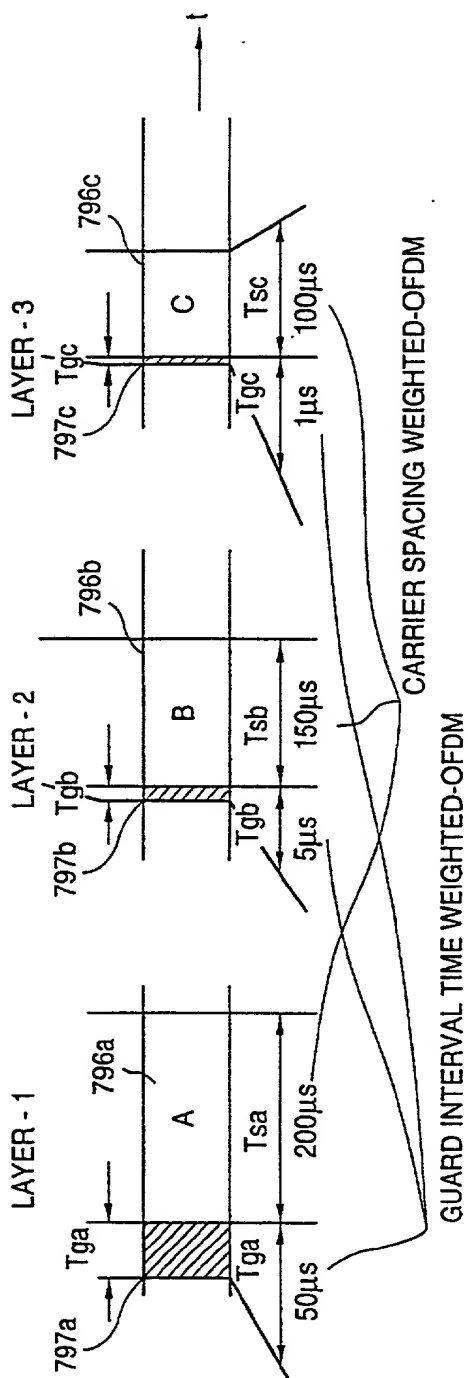


FIG. 149(c)

FIG. 150

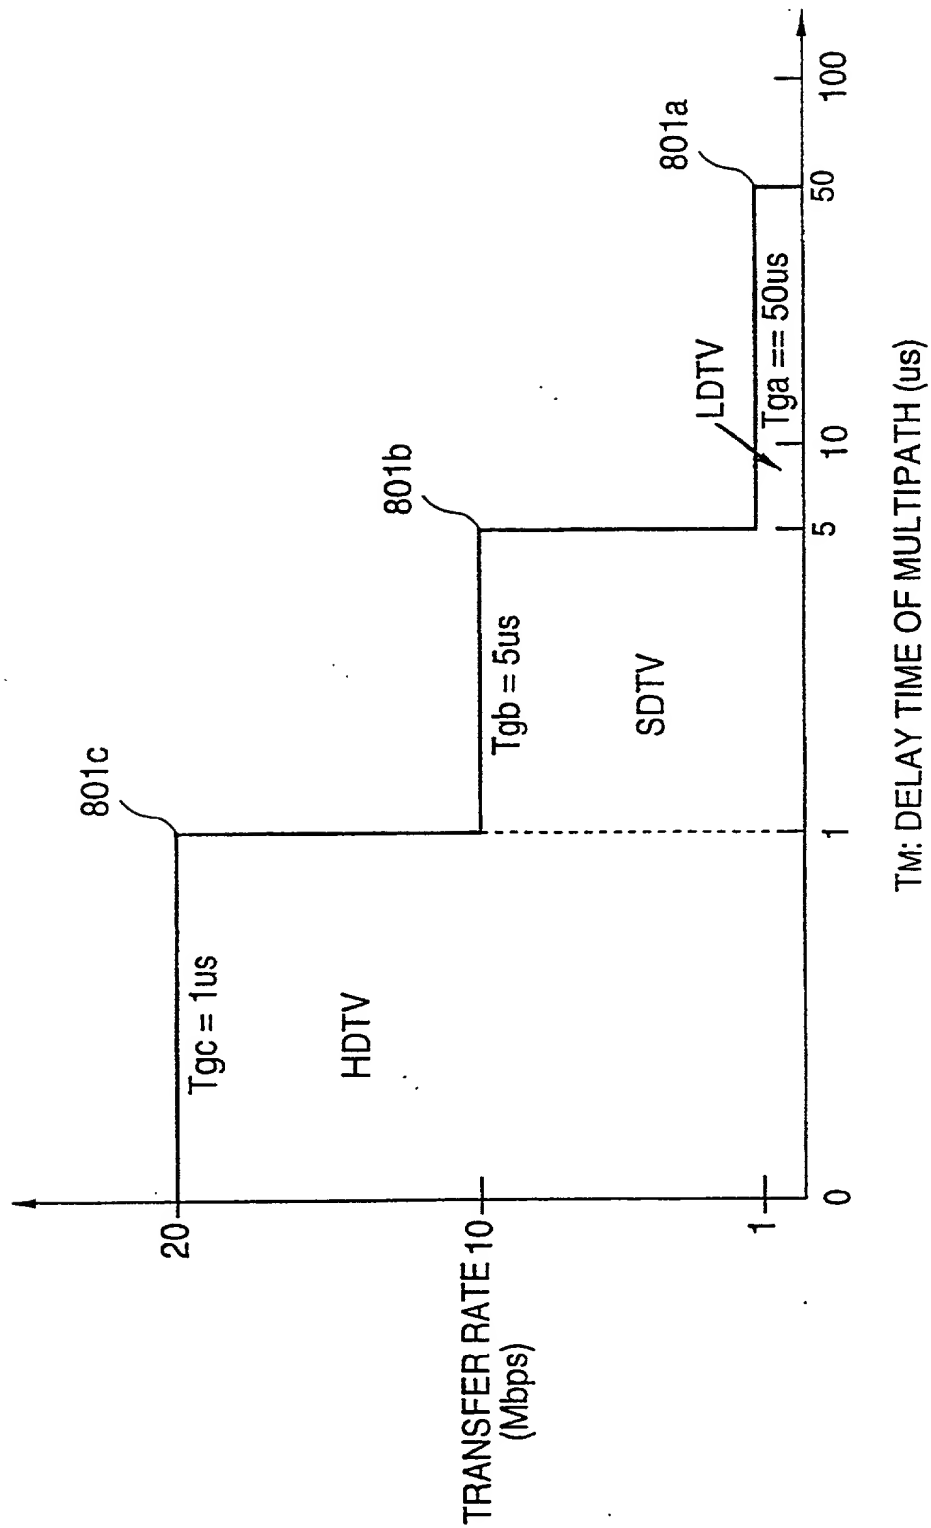


FIG. 151

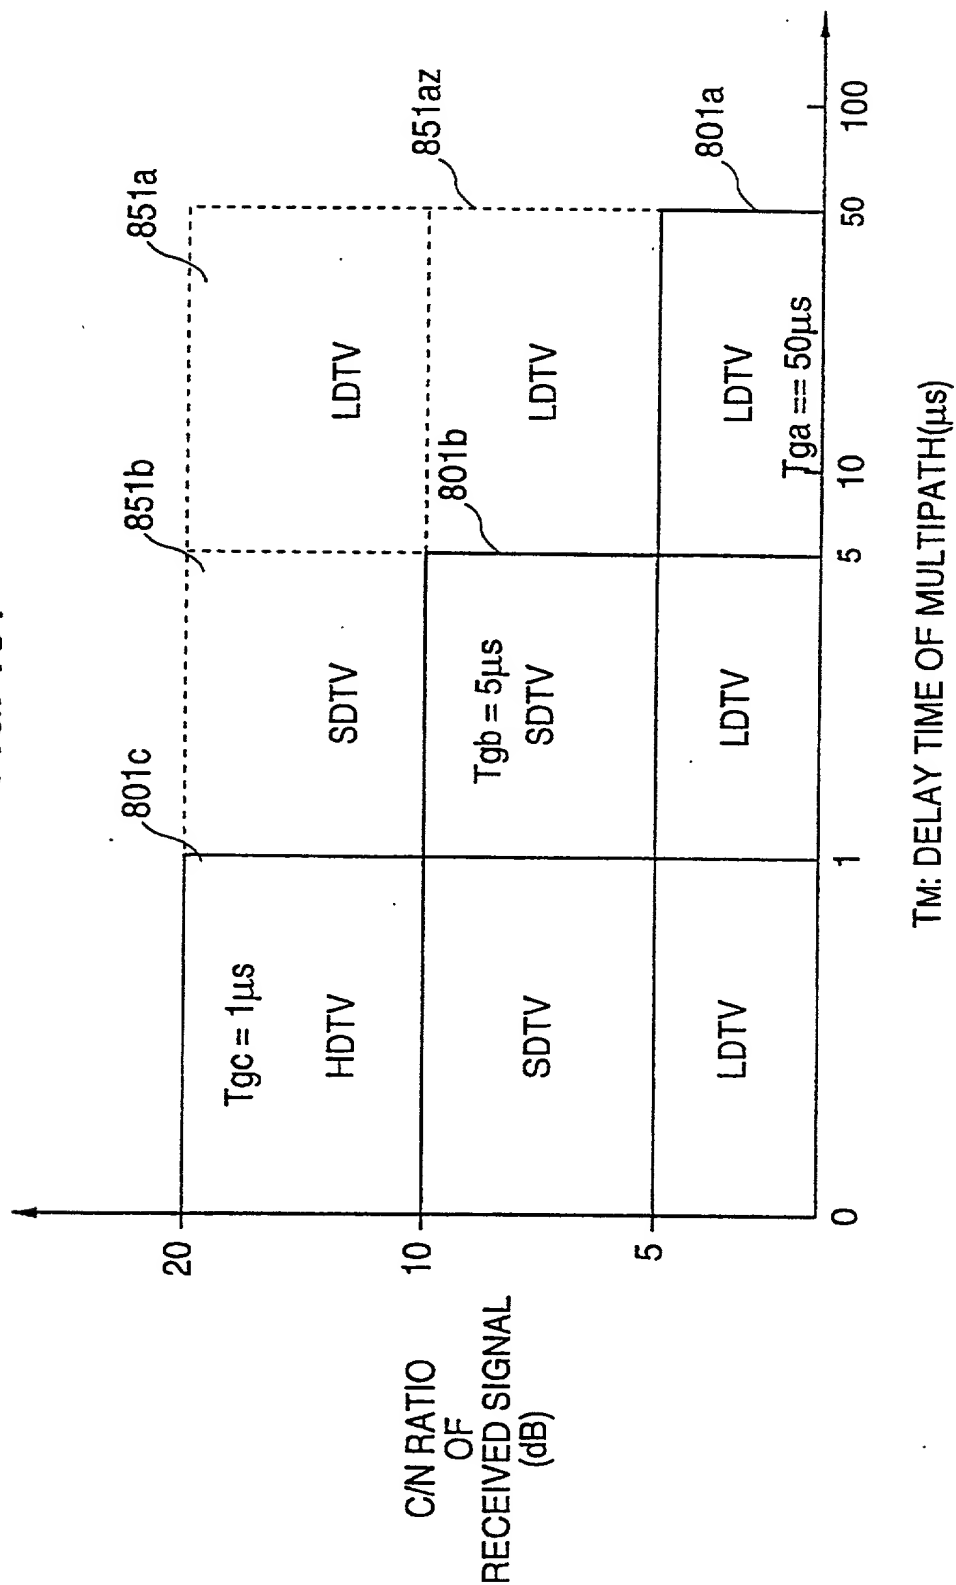


FIG. 152


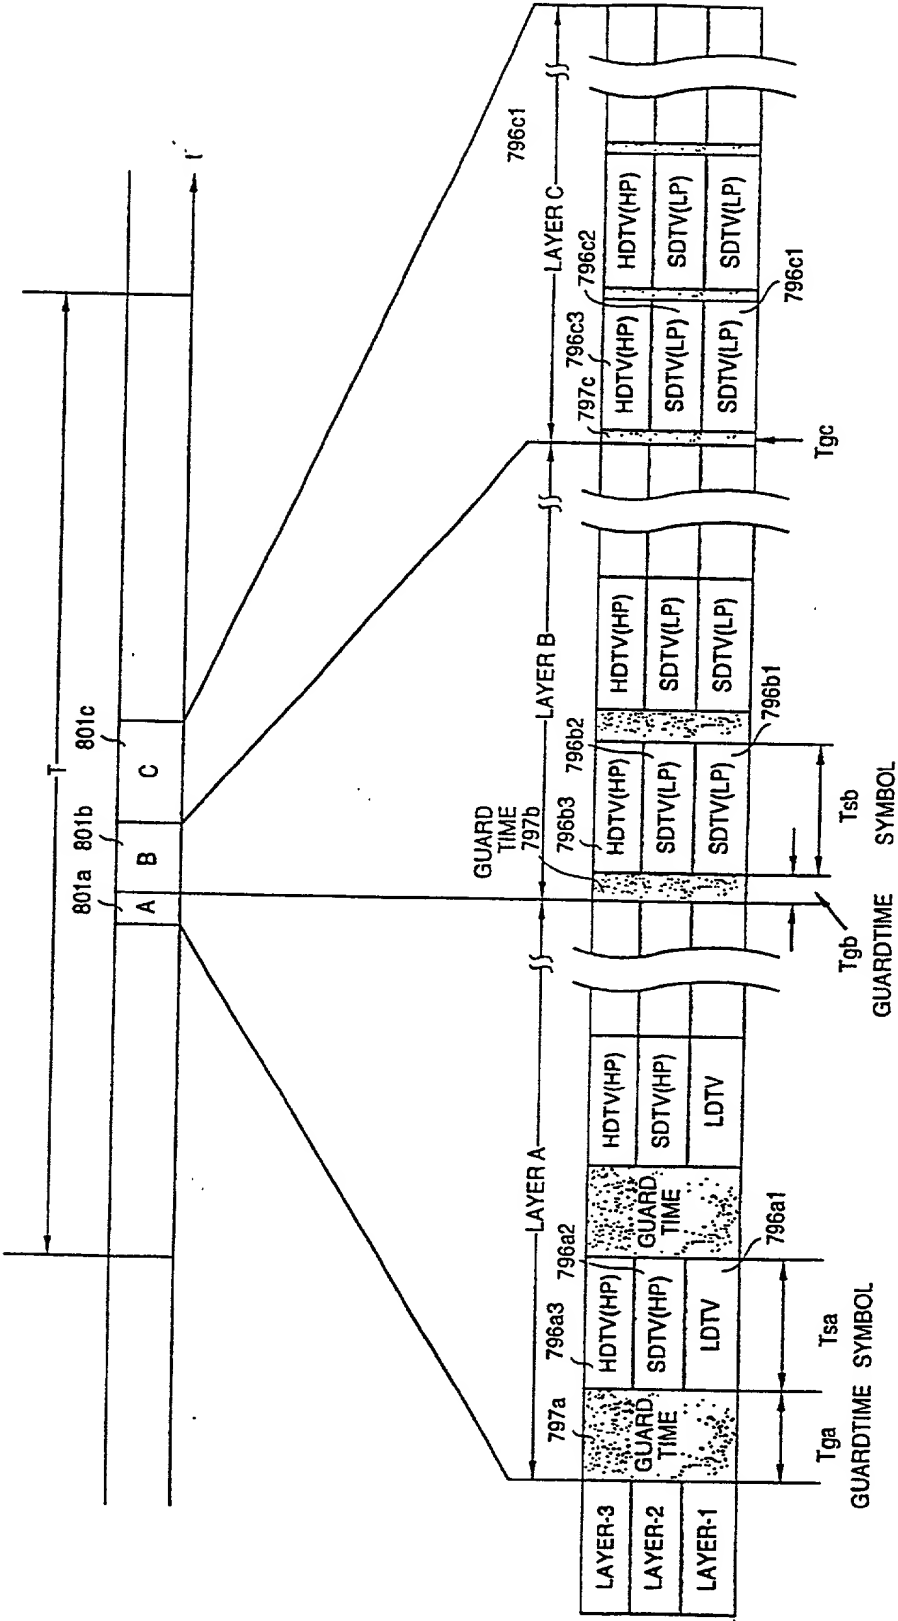


FIG. 153

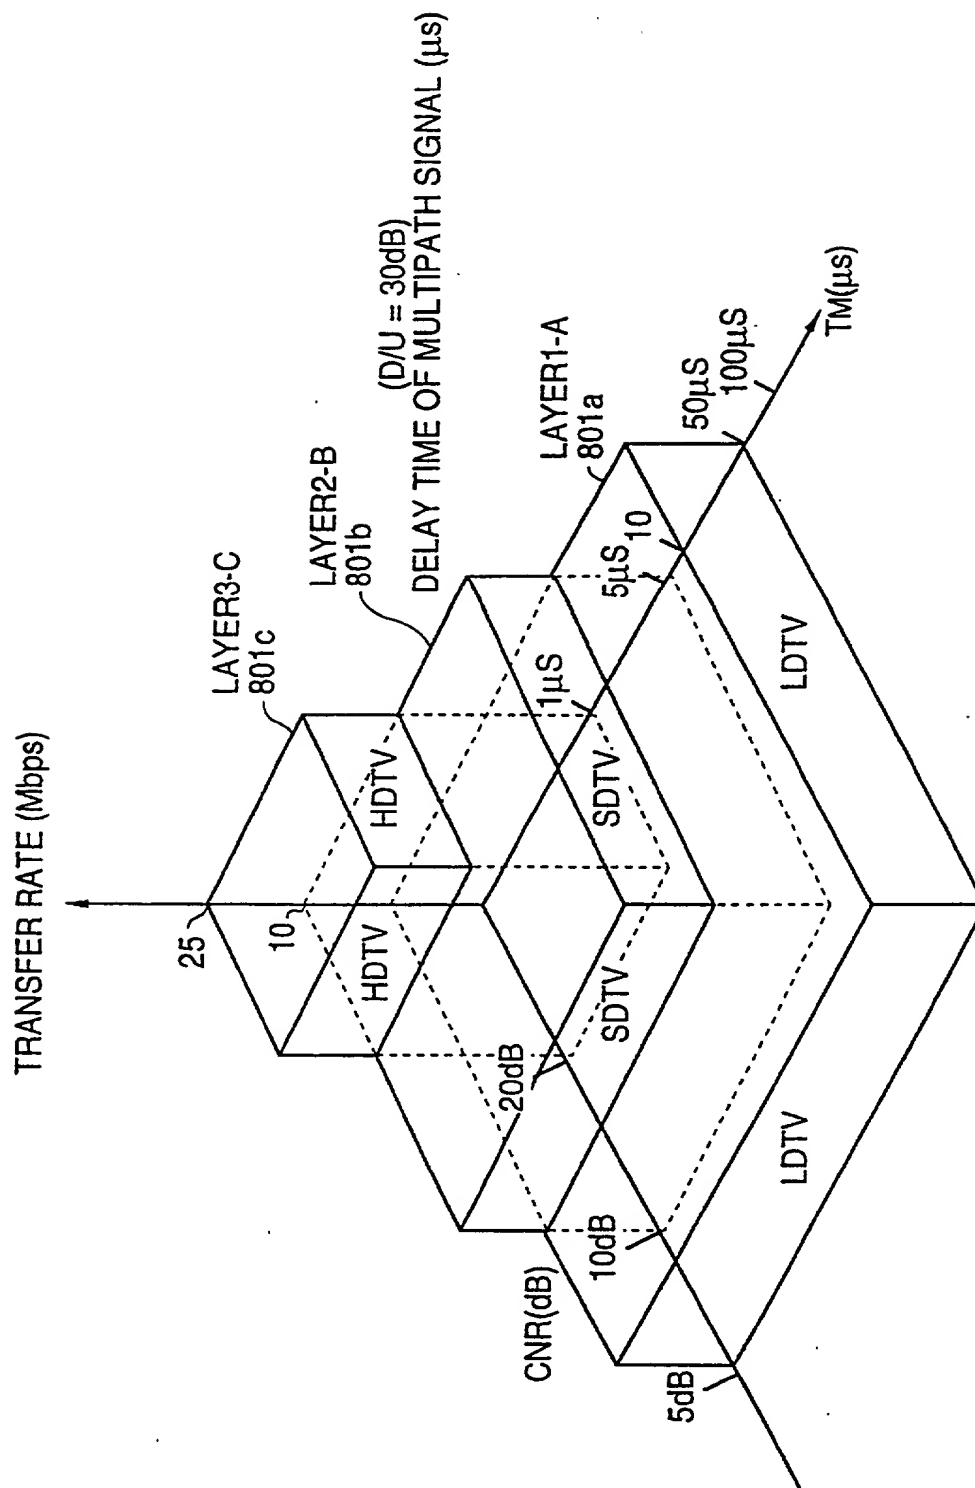

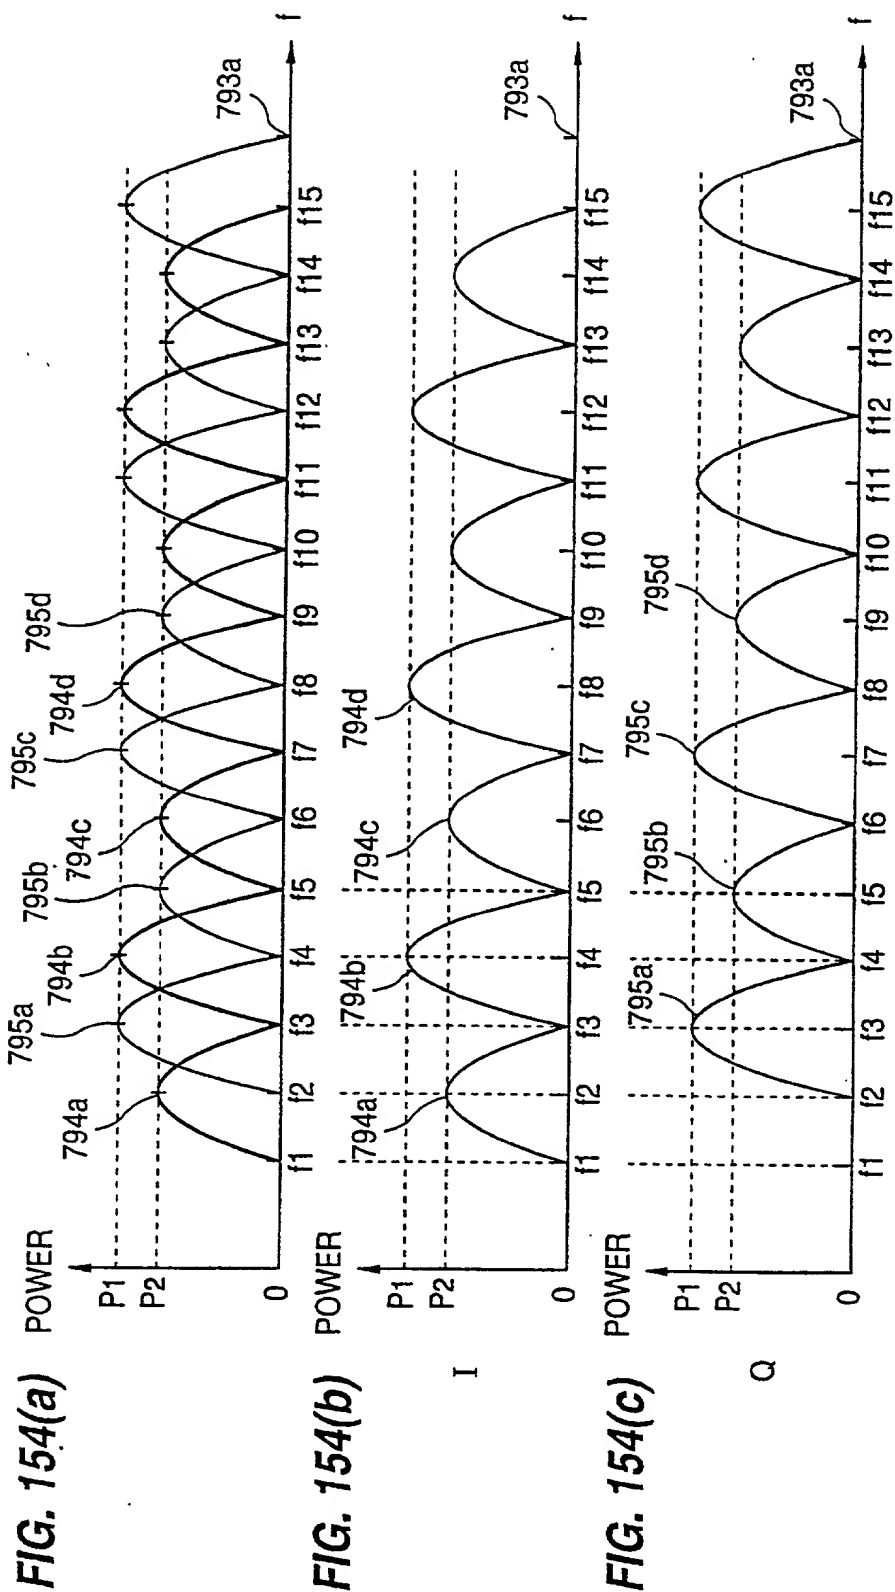


FIG. 155

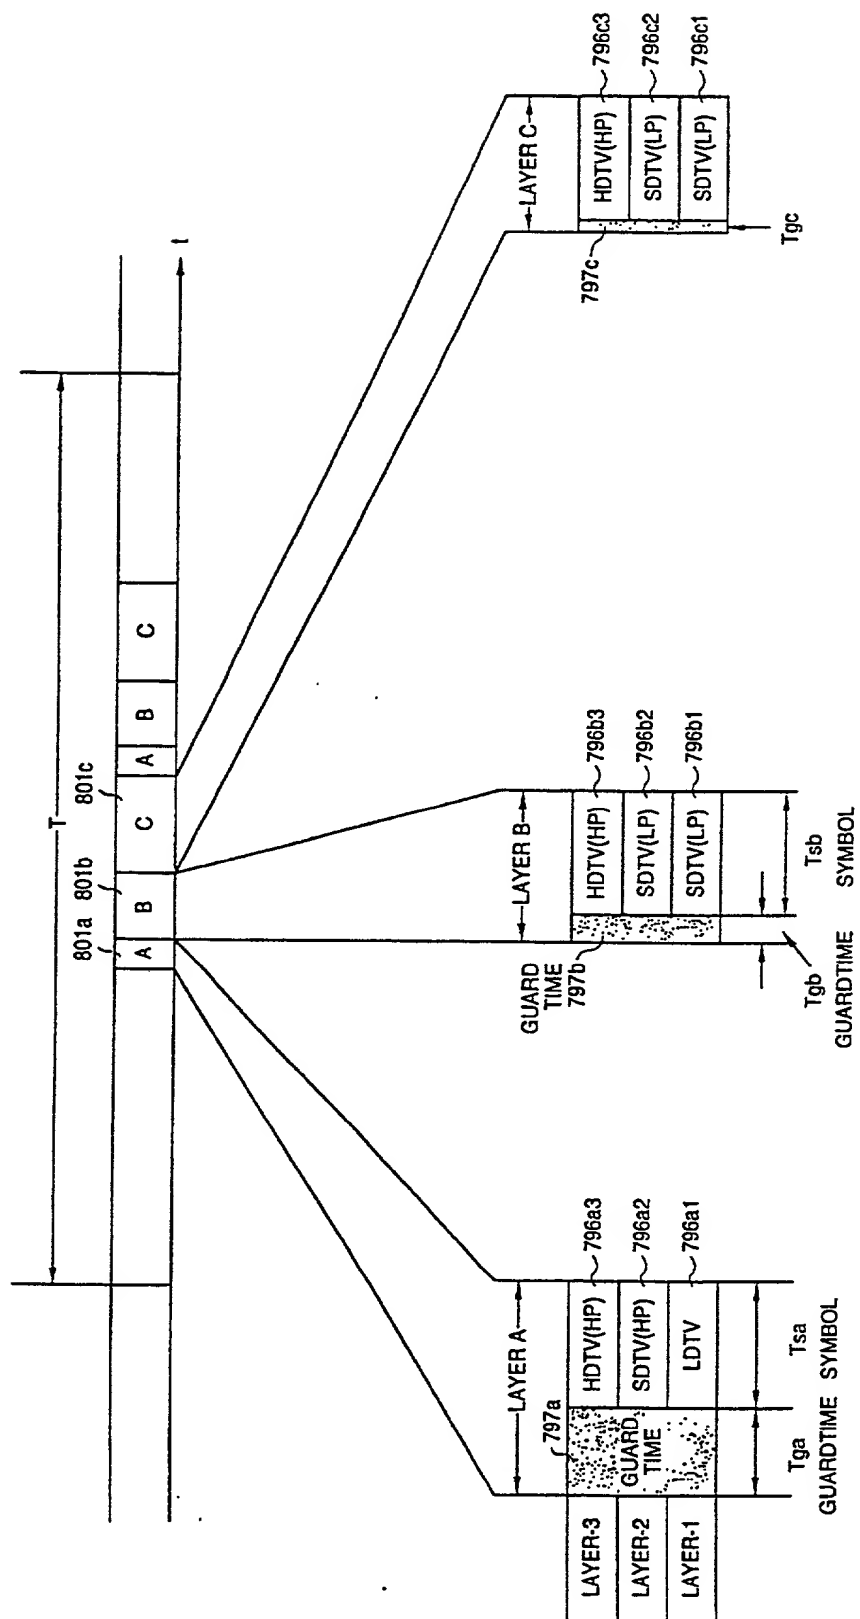


FIG. 156

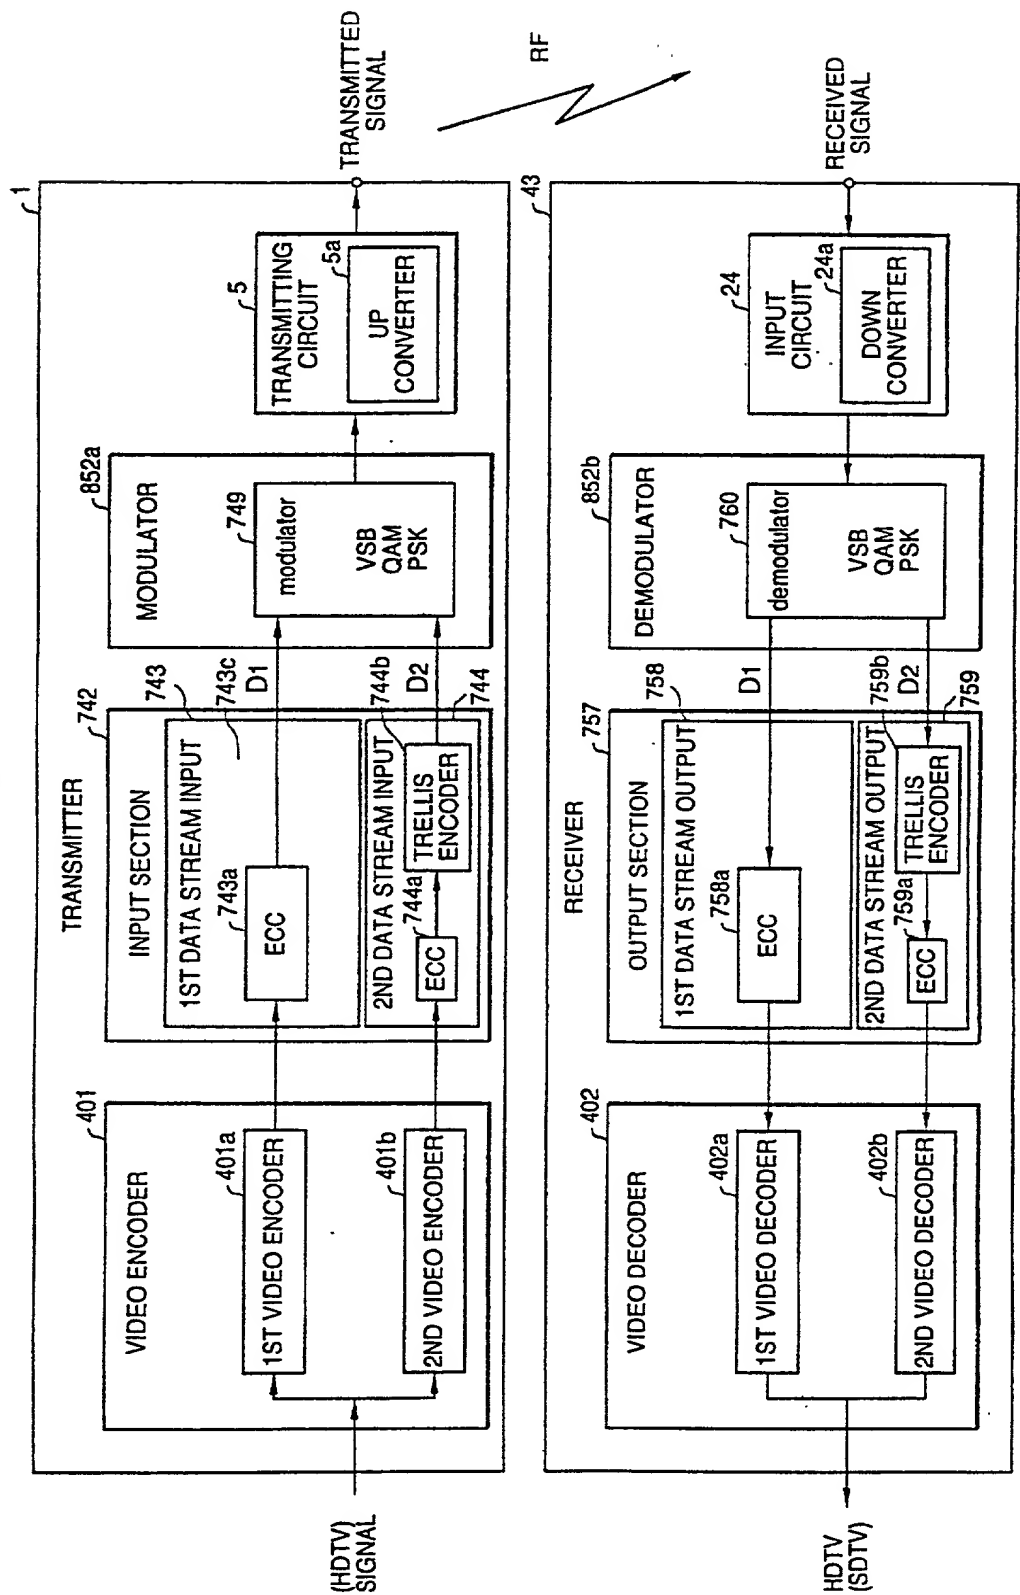


FIG. 157


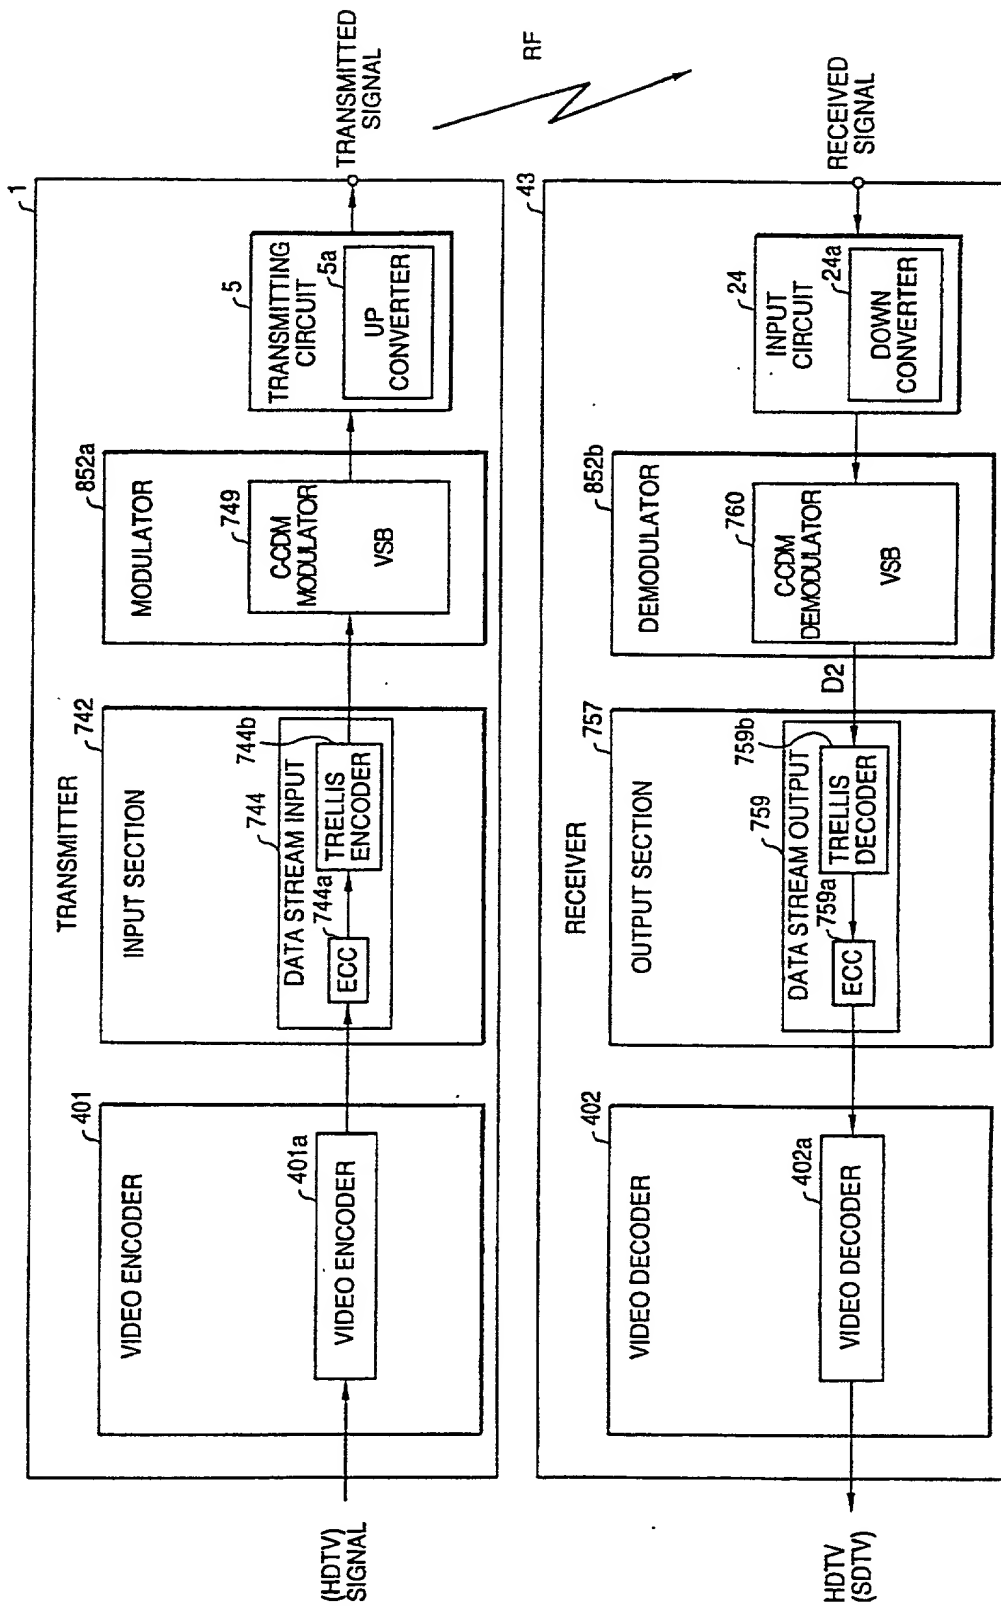


FIG. 158

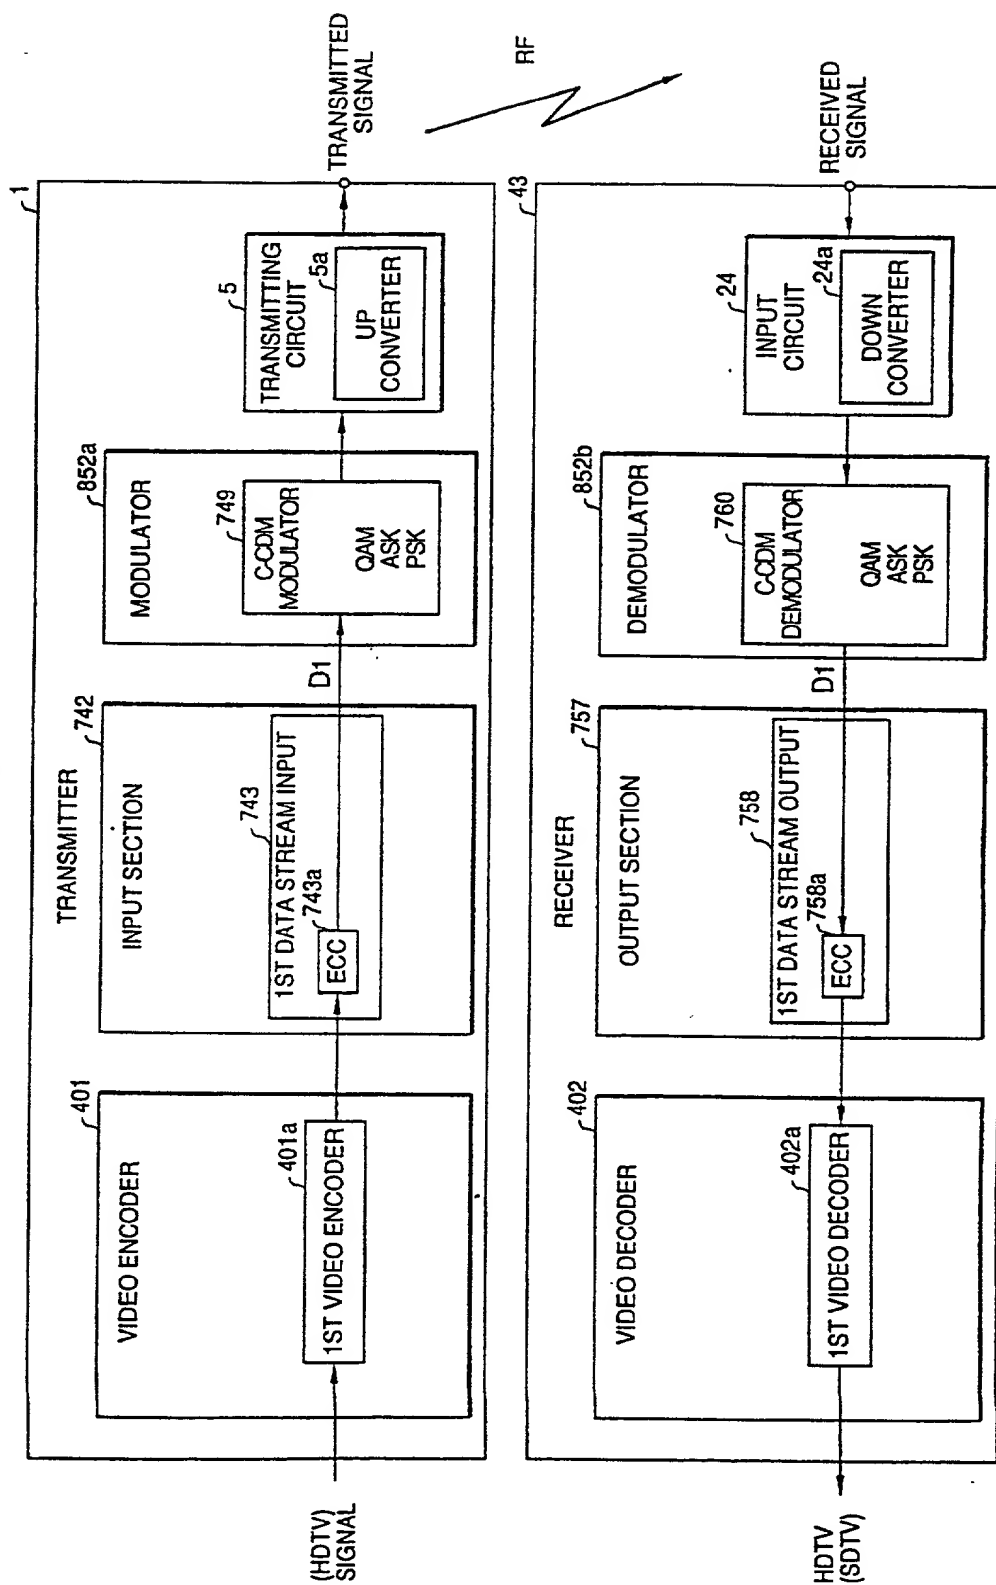

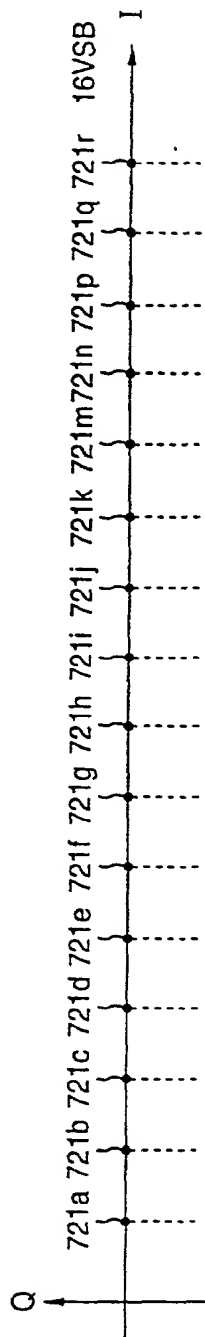


FIG. 159(a)

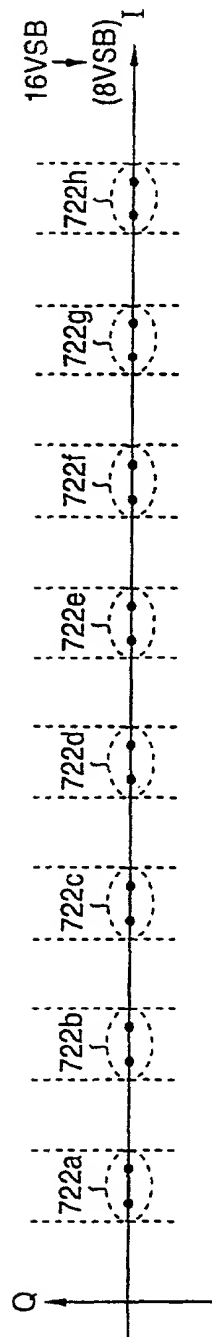


FIG. 159(b)

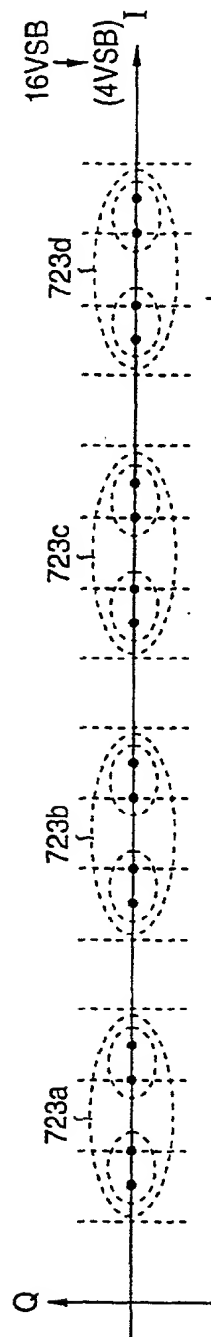


FIG. 159(c)

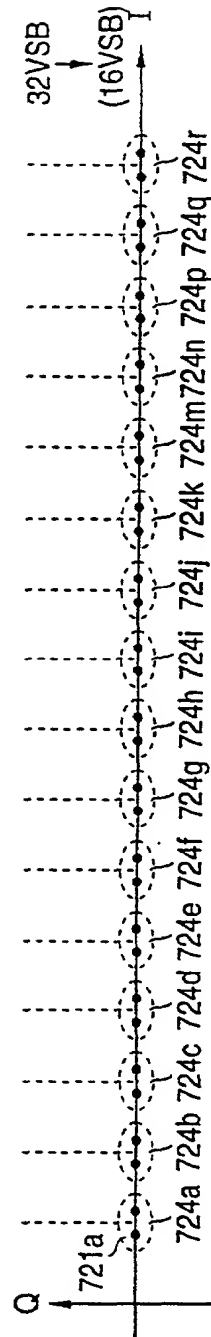


FIG. 159(d)

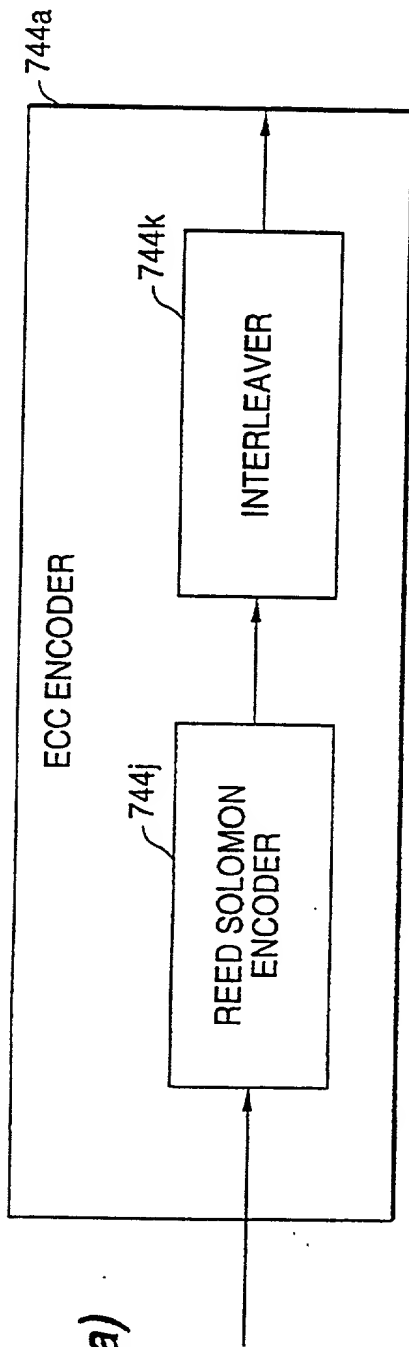


FIG. 160(a)

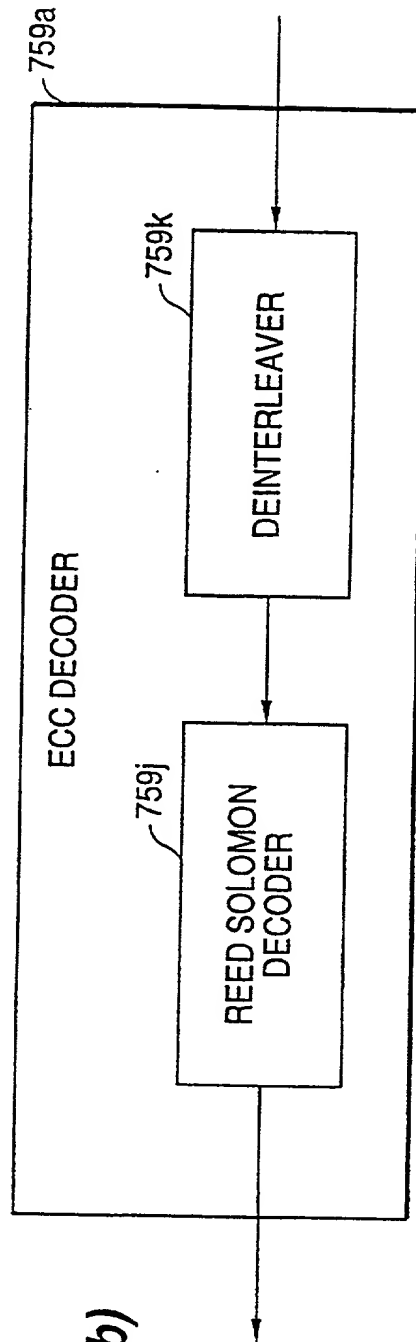


FIG. 160(b)

FIG. 161

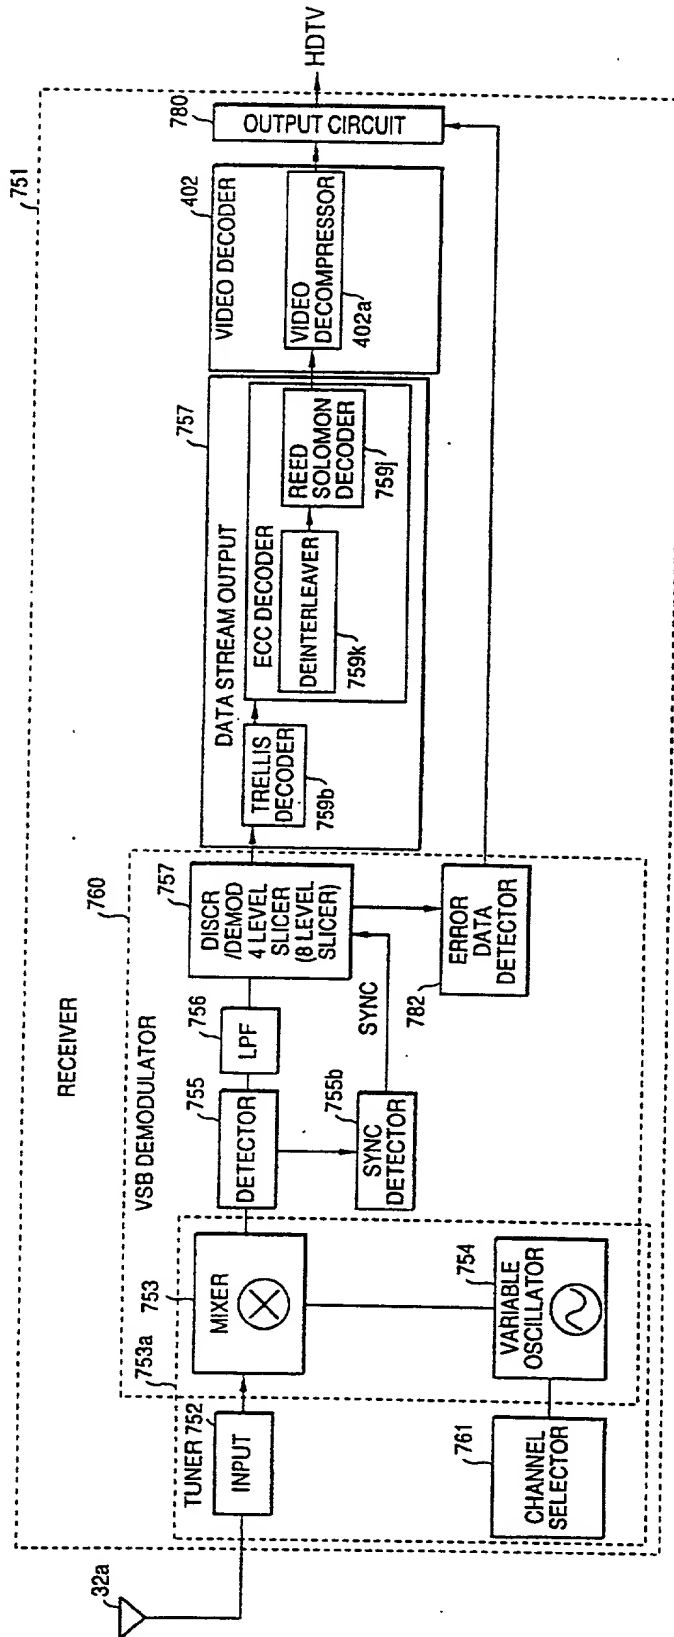


FIG. 162

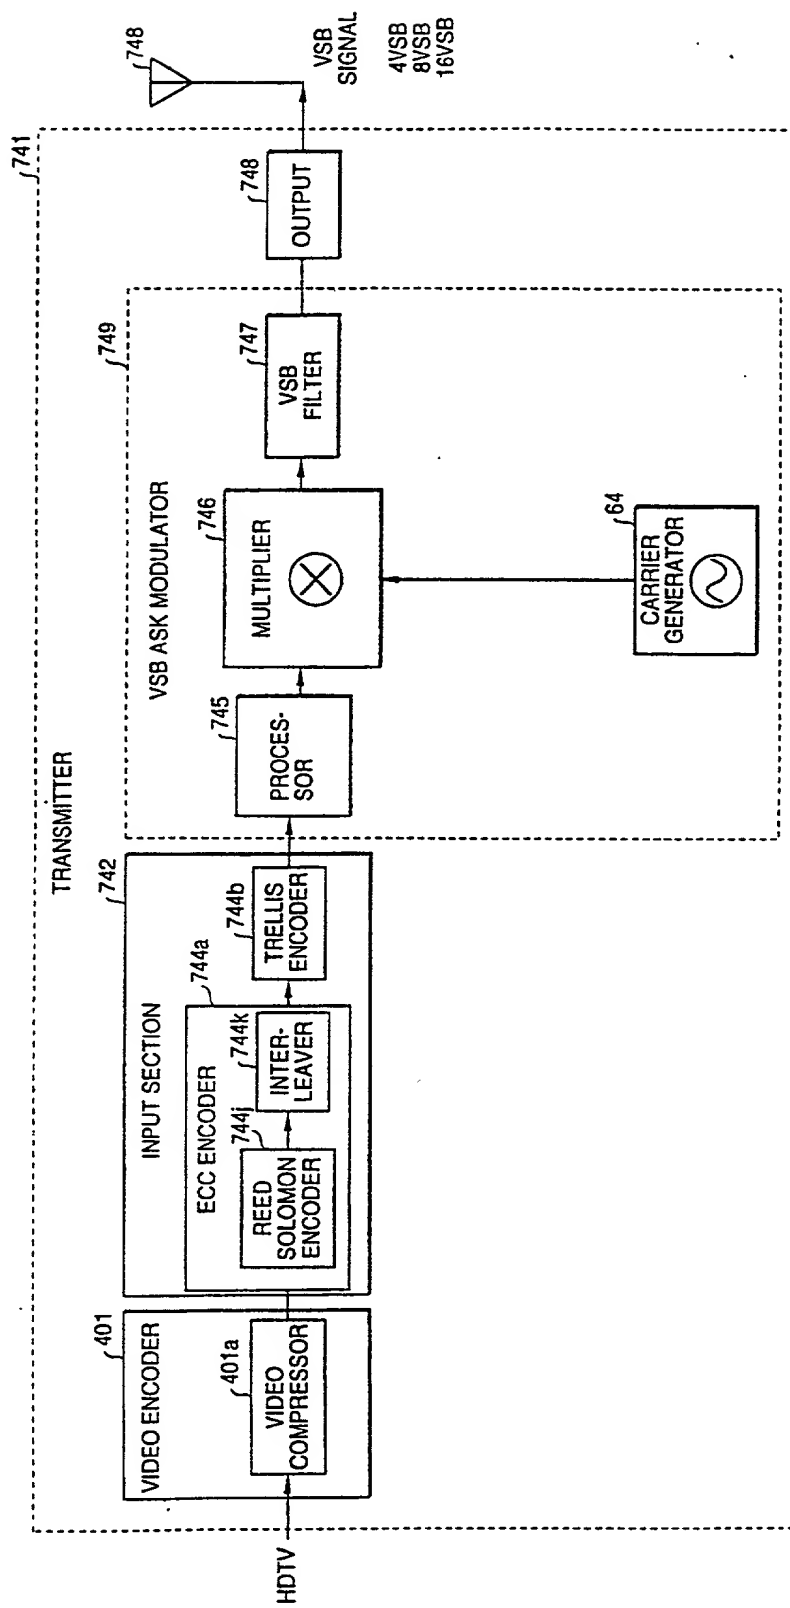


FIG. 163

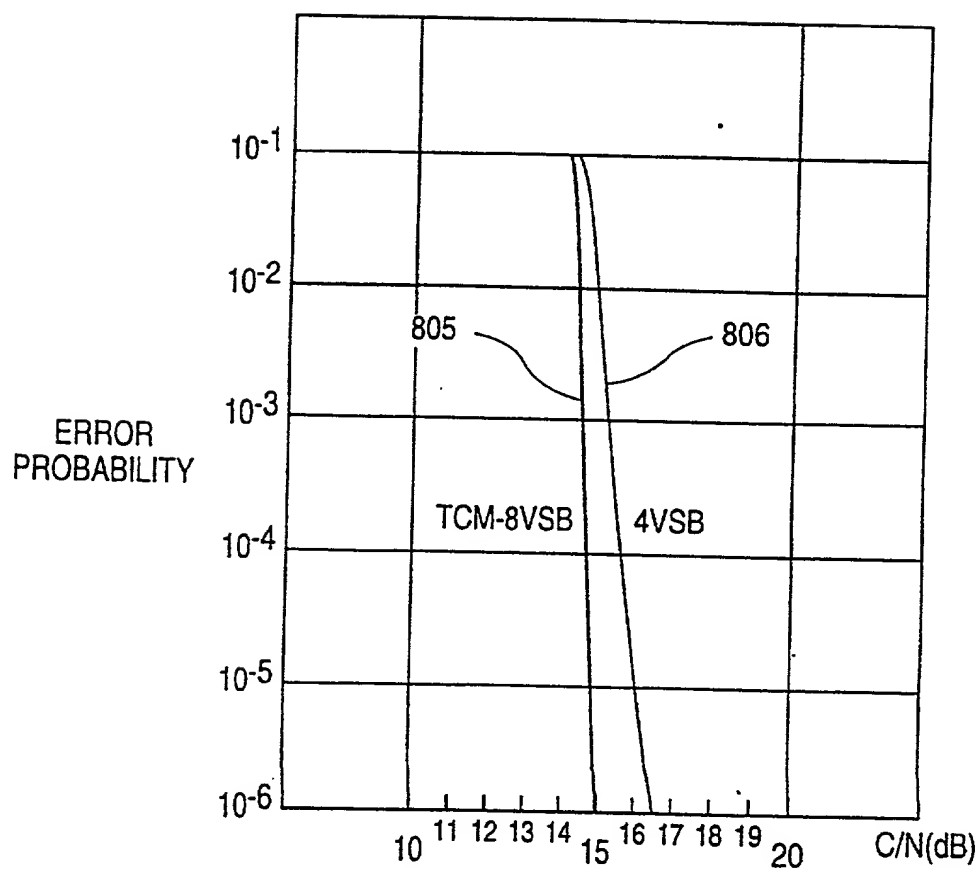


FIG. 164

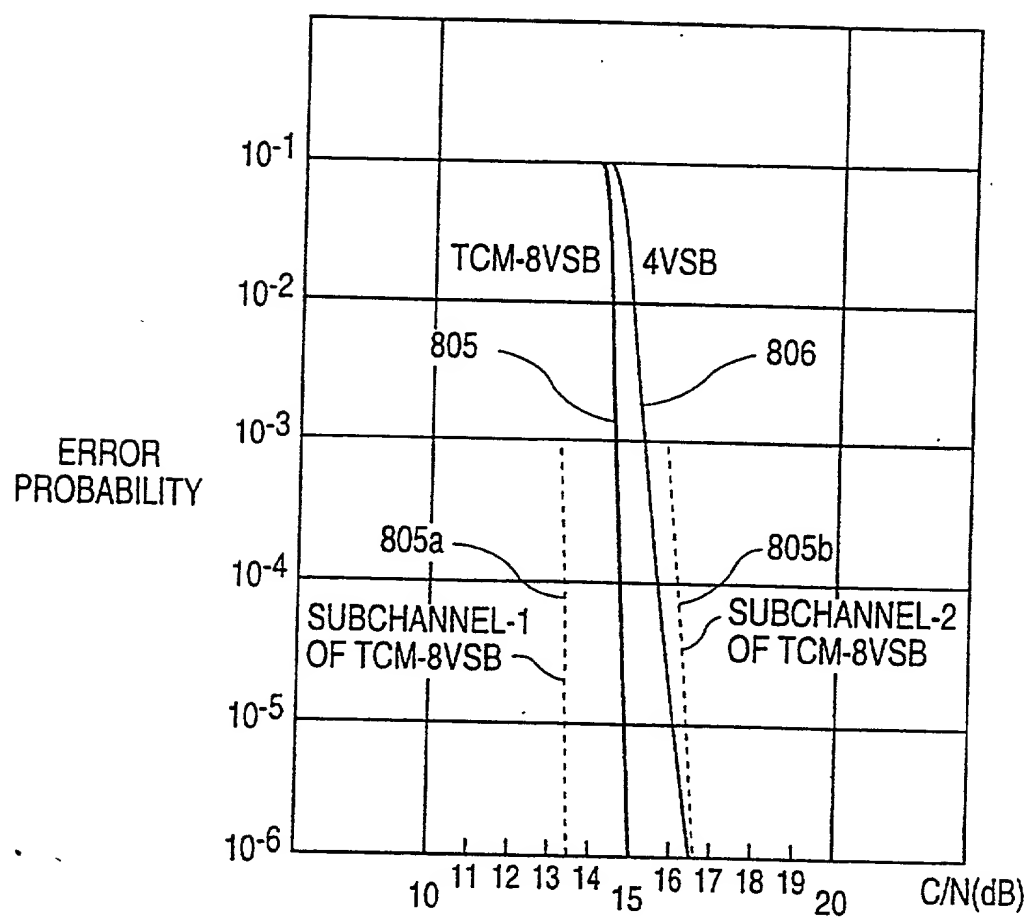


FIG. 165(a)

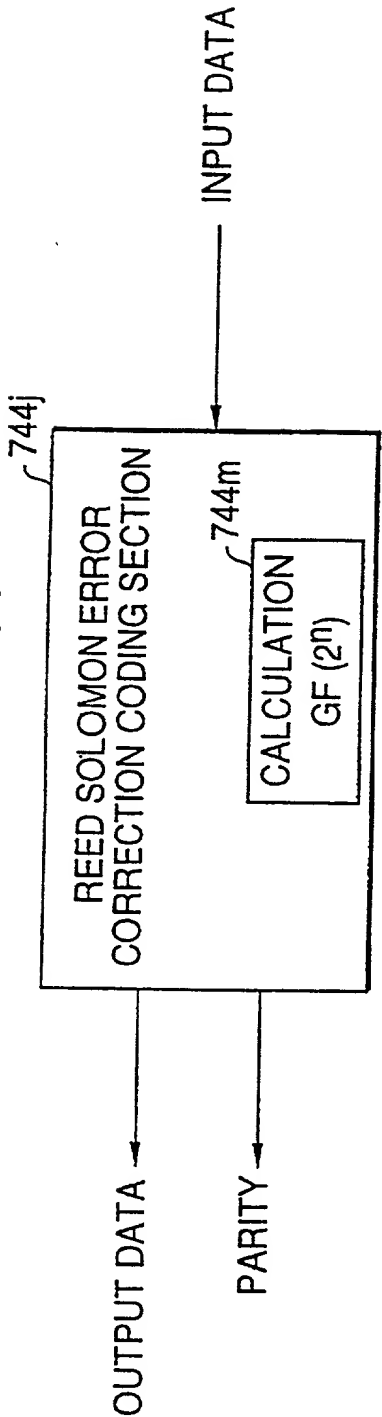


FIG. 165(b)

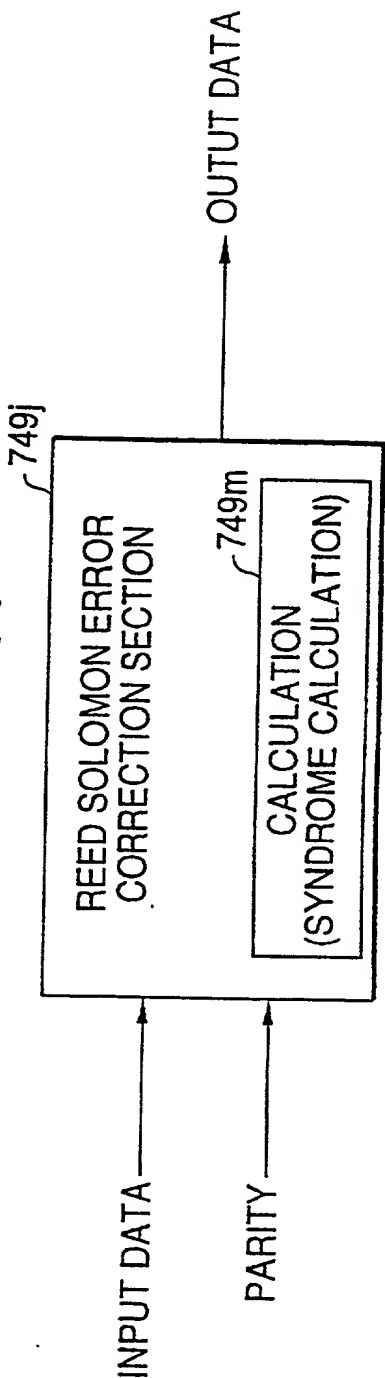


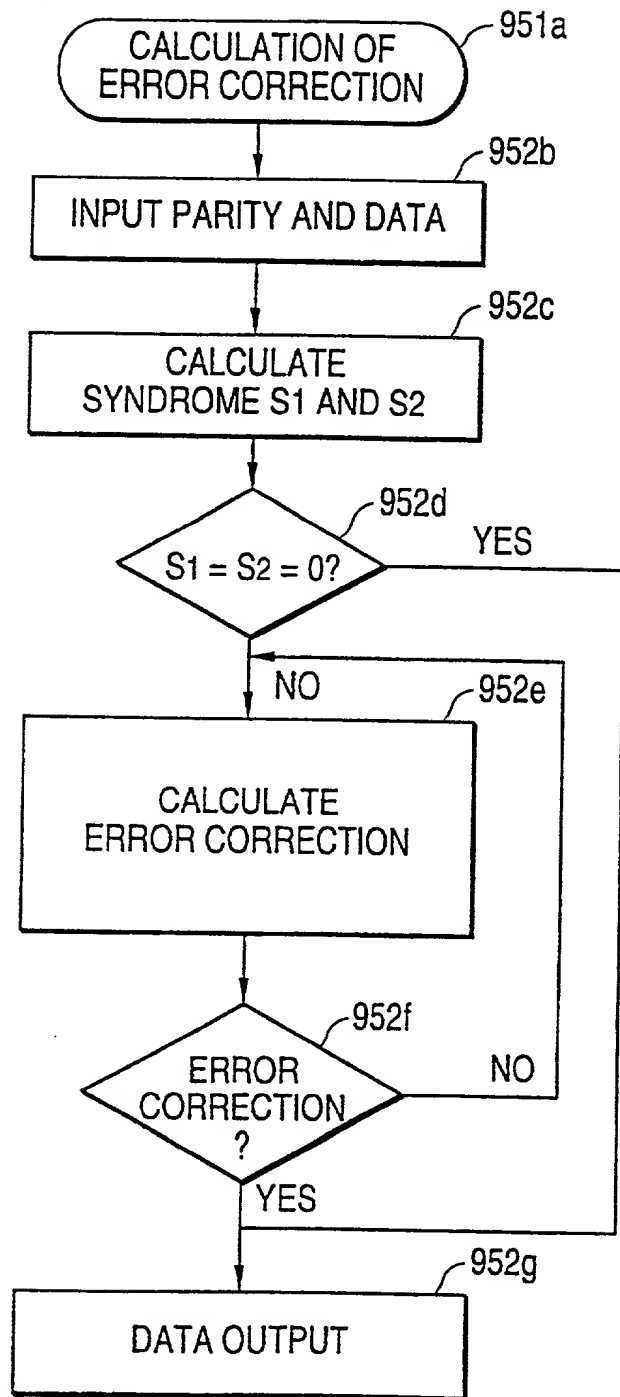
FIG. 166

FIG. 167

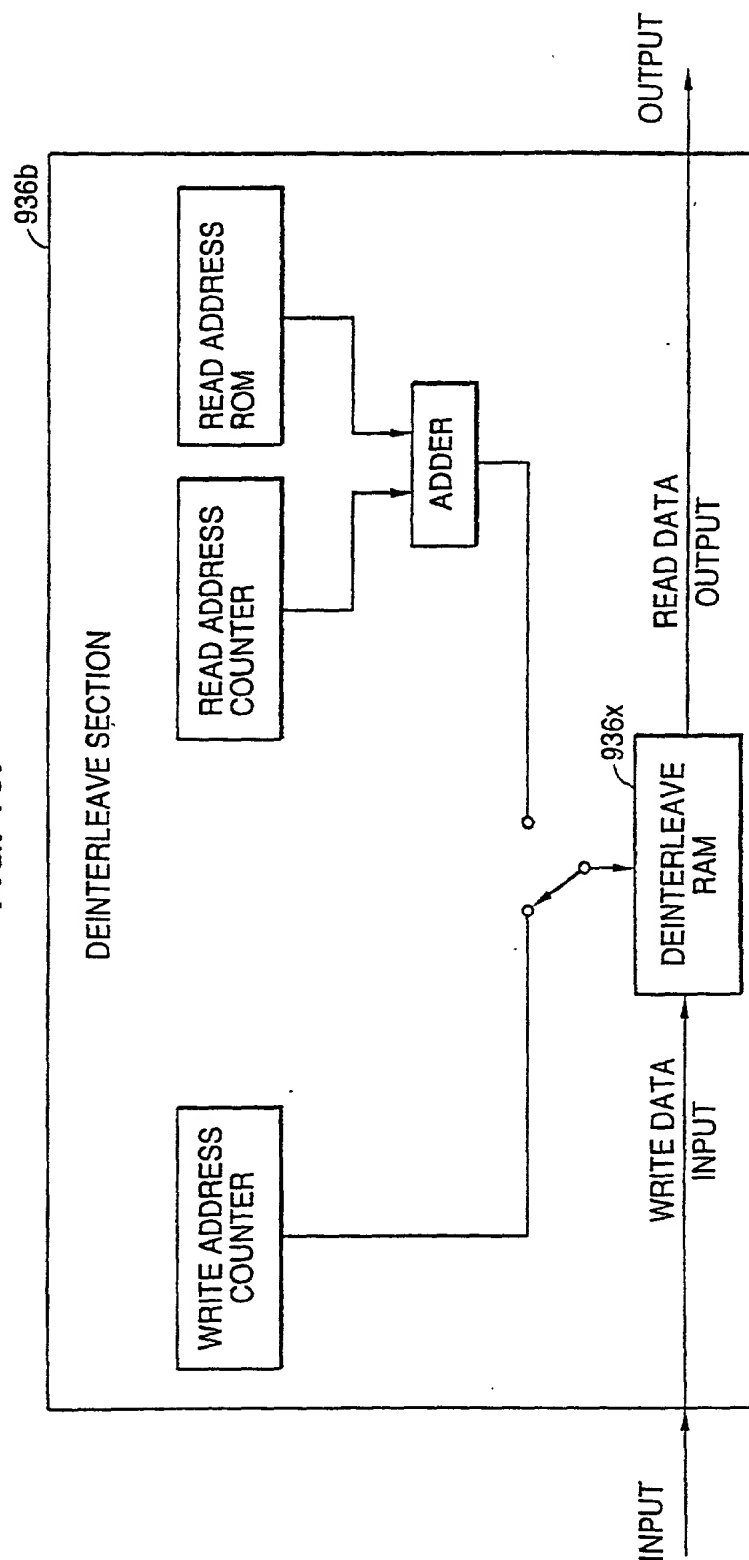


FIG. 168(a)

INTERLEAVE TABLE

1	2	3	4	5	6	7
DATA						C2 PARITY
1	A 1	A 2	A 3	A 4	A 5	A 6
2	B 1	B 2	B 3	B 4		
3	C 1					
4	D 1					
5	E 1					
6	F 1					
C1 PARITY	PARITY	PARITY	PARITY	PARITY	PARITY	PARITY

FIG. 168(b)

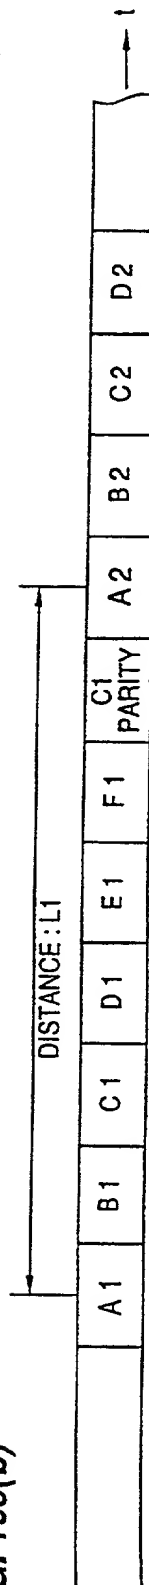


FIG. 169

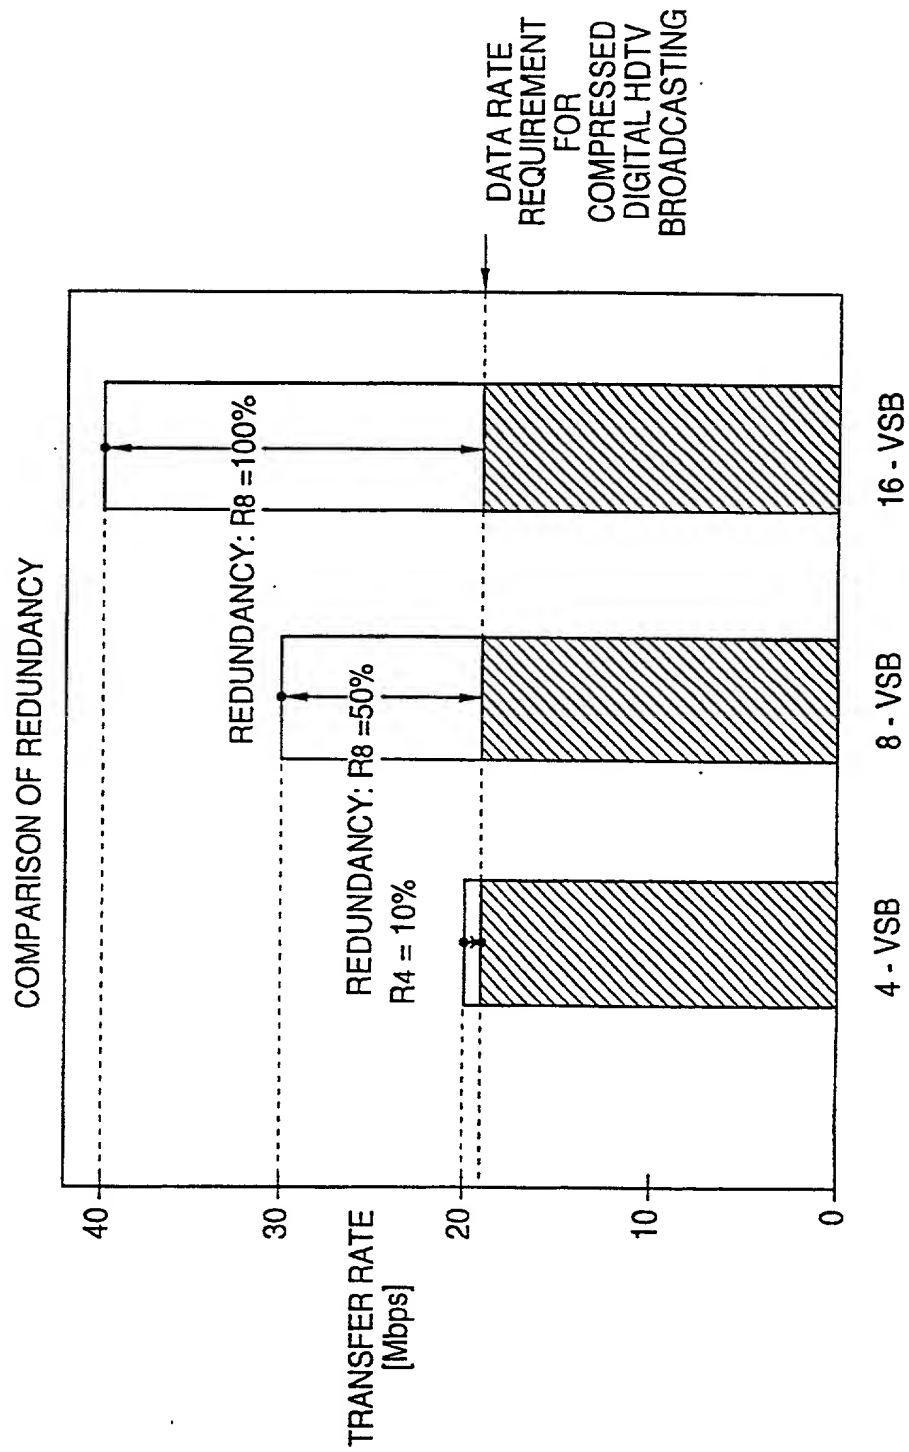


FIG. 170

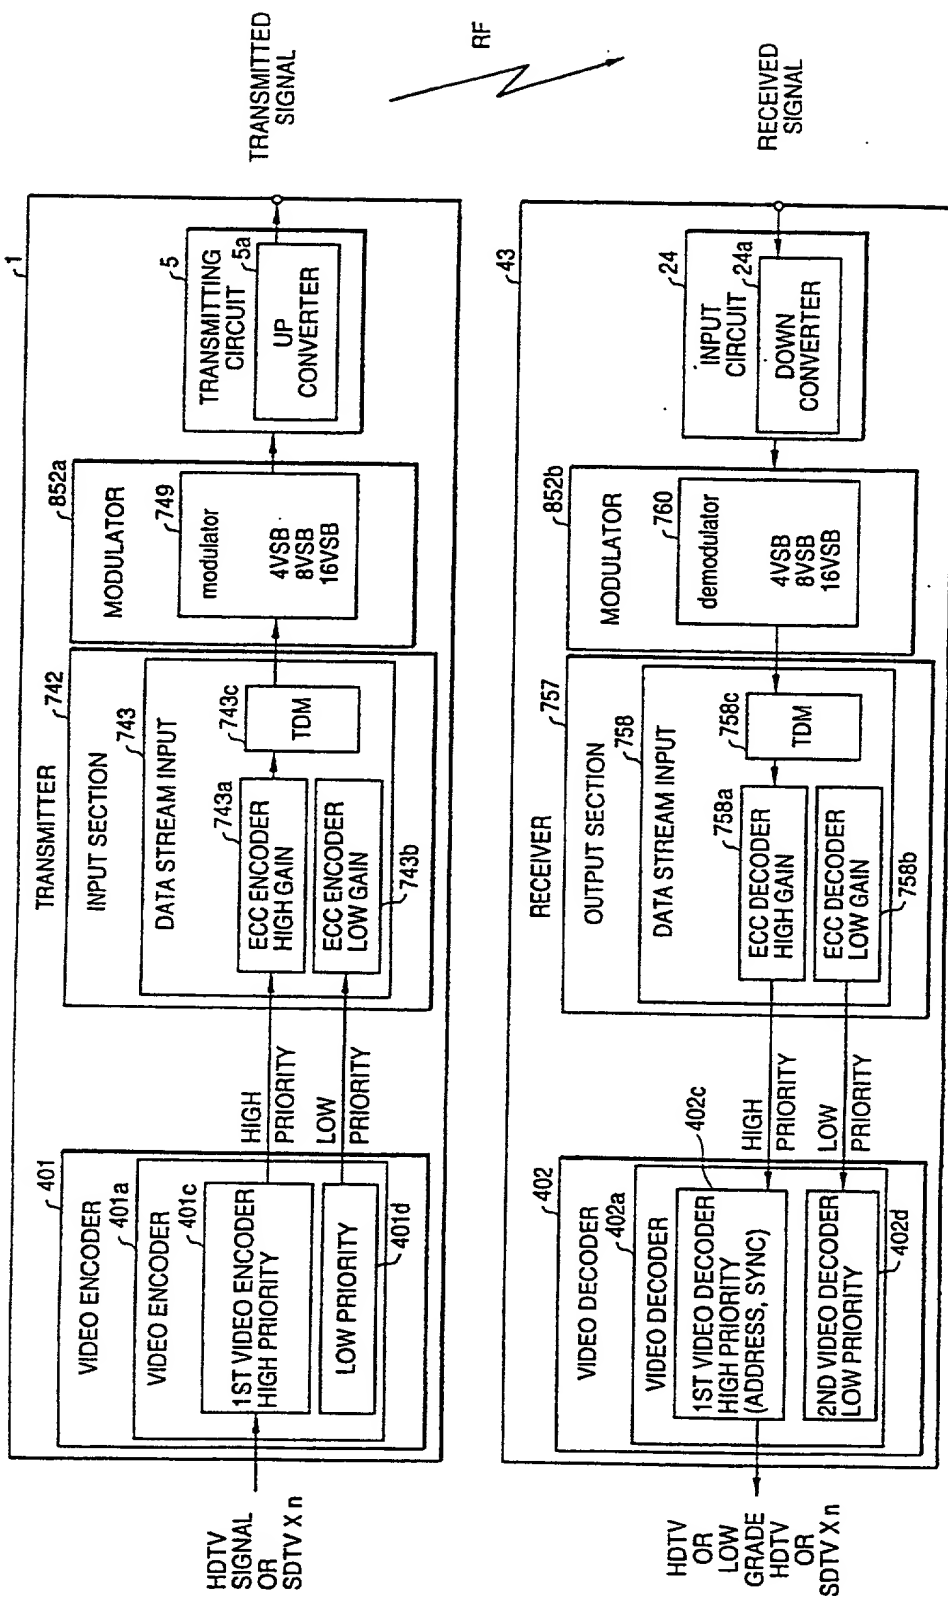


FIG. 171

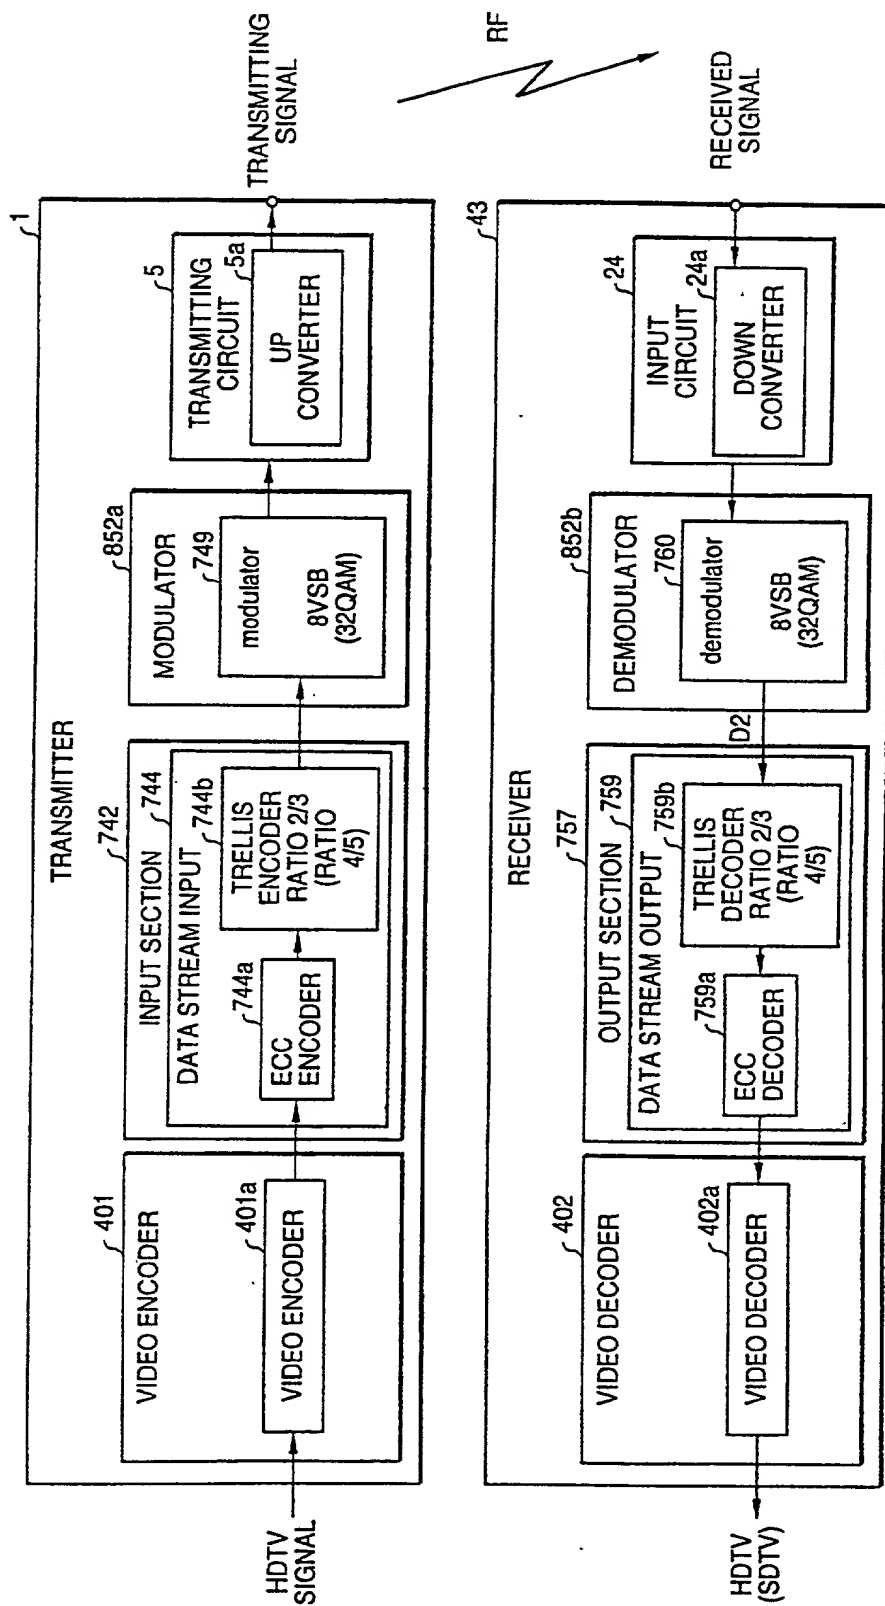


FIG. 172

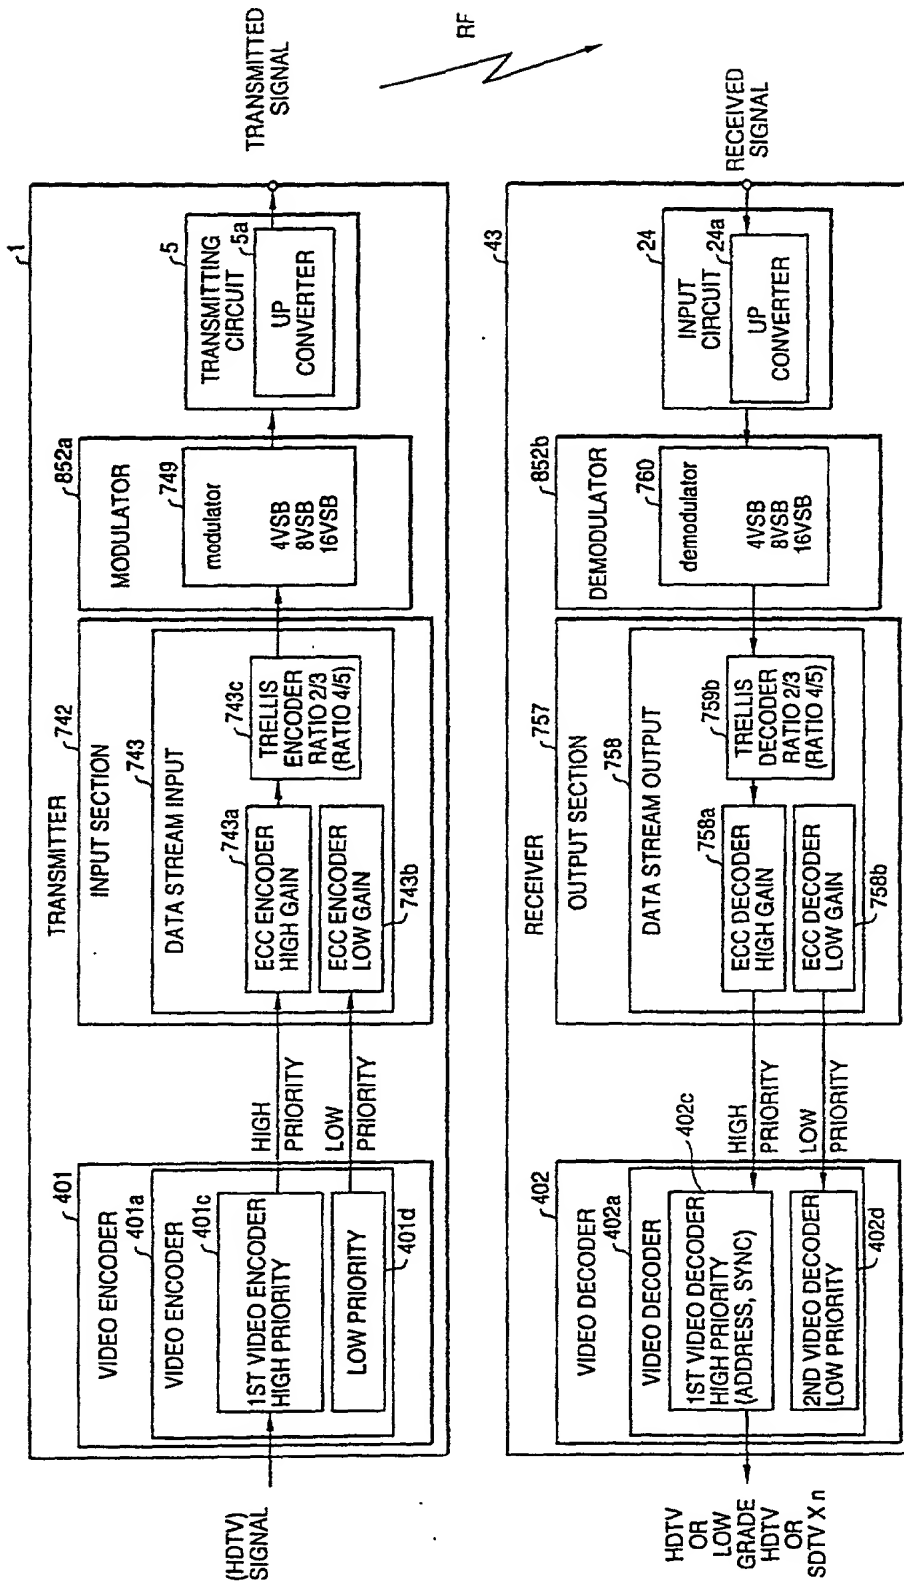


FIG. 173

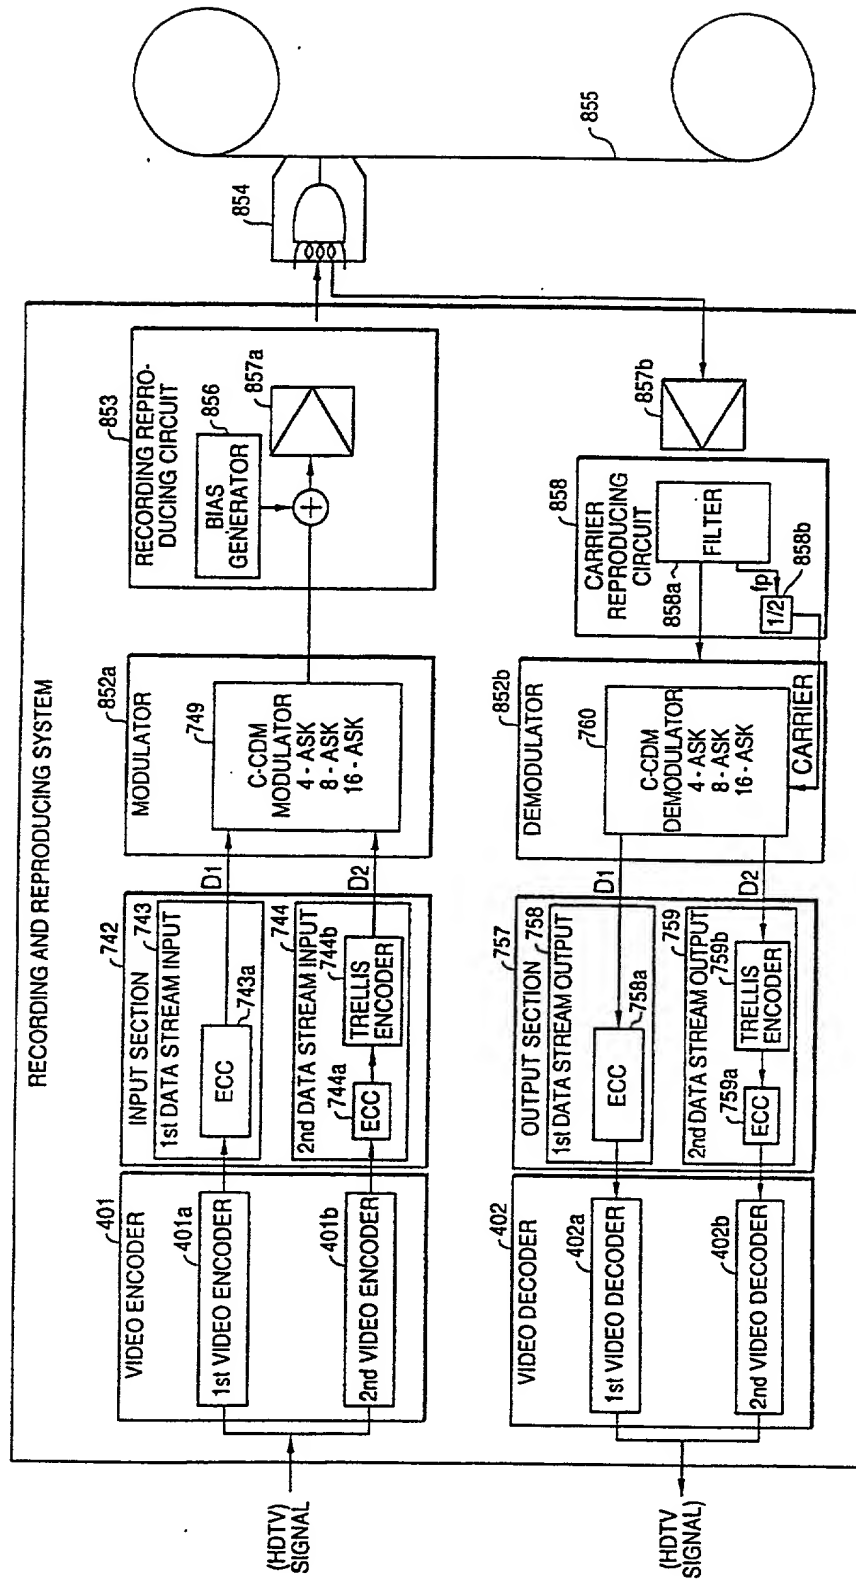


FIG. 174

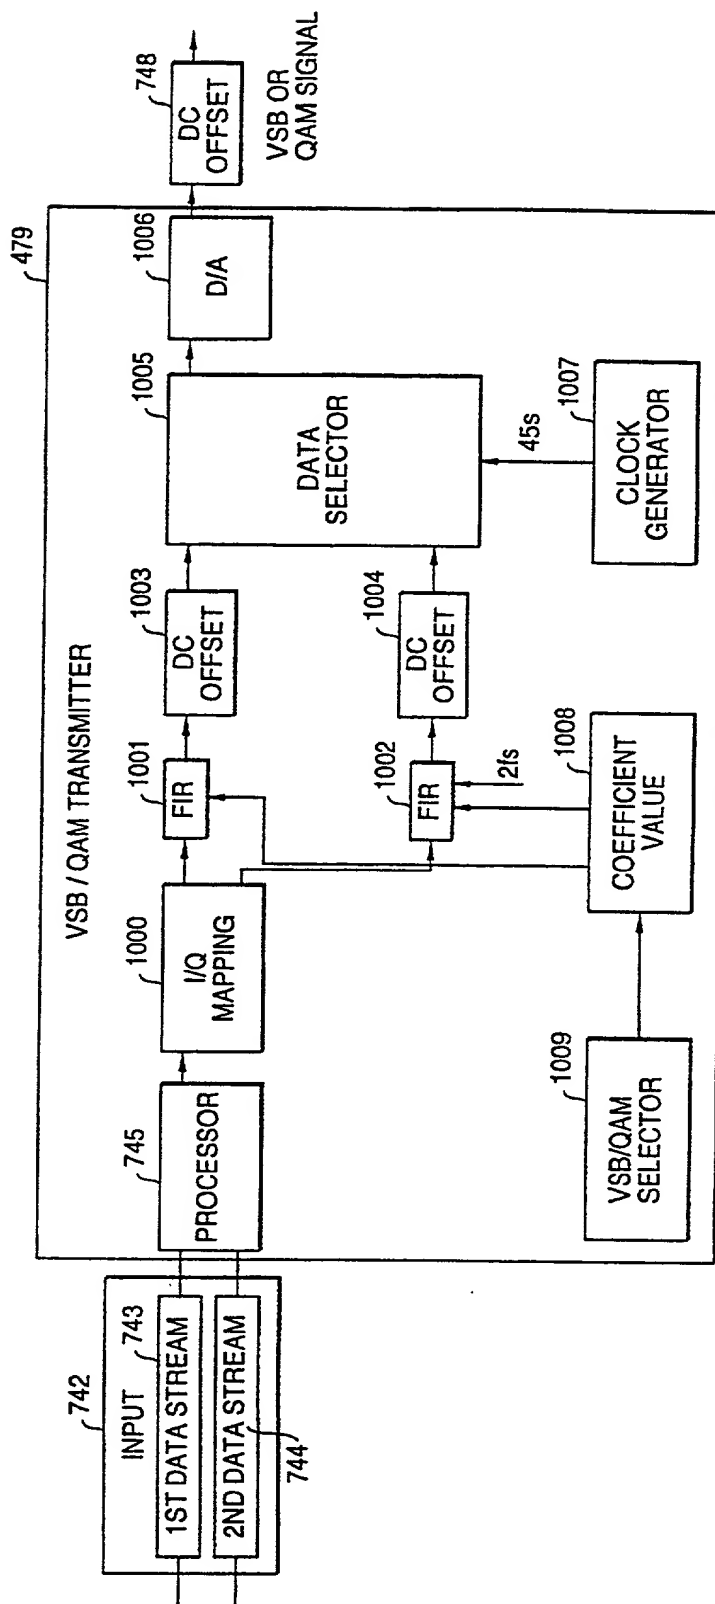


FIG. 175

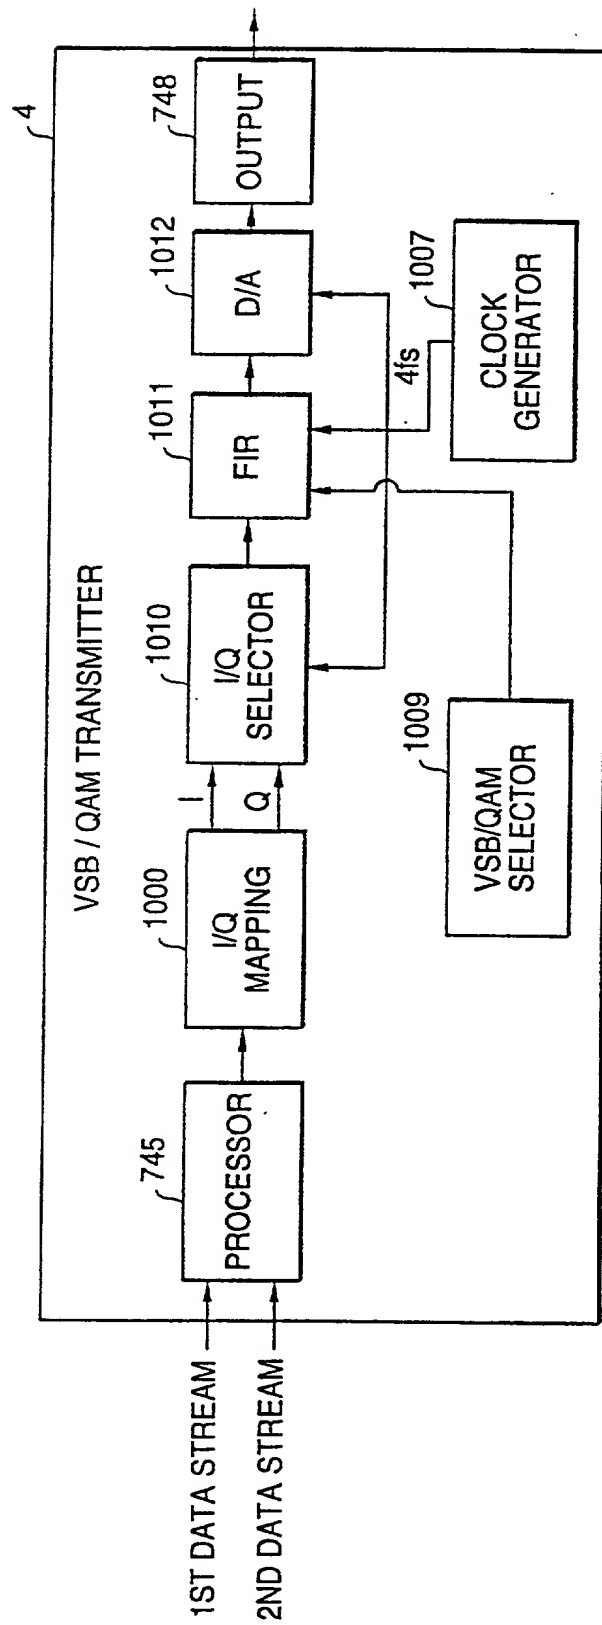


FIG. 176

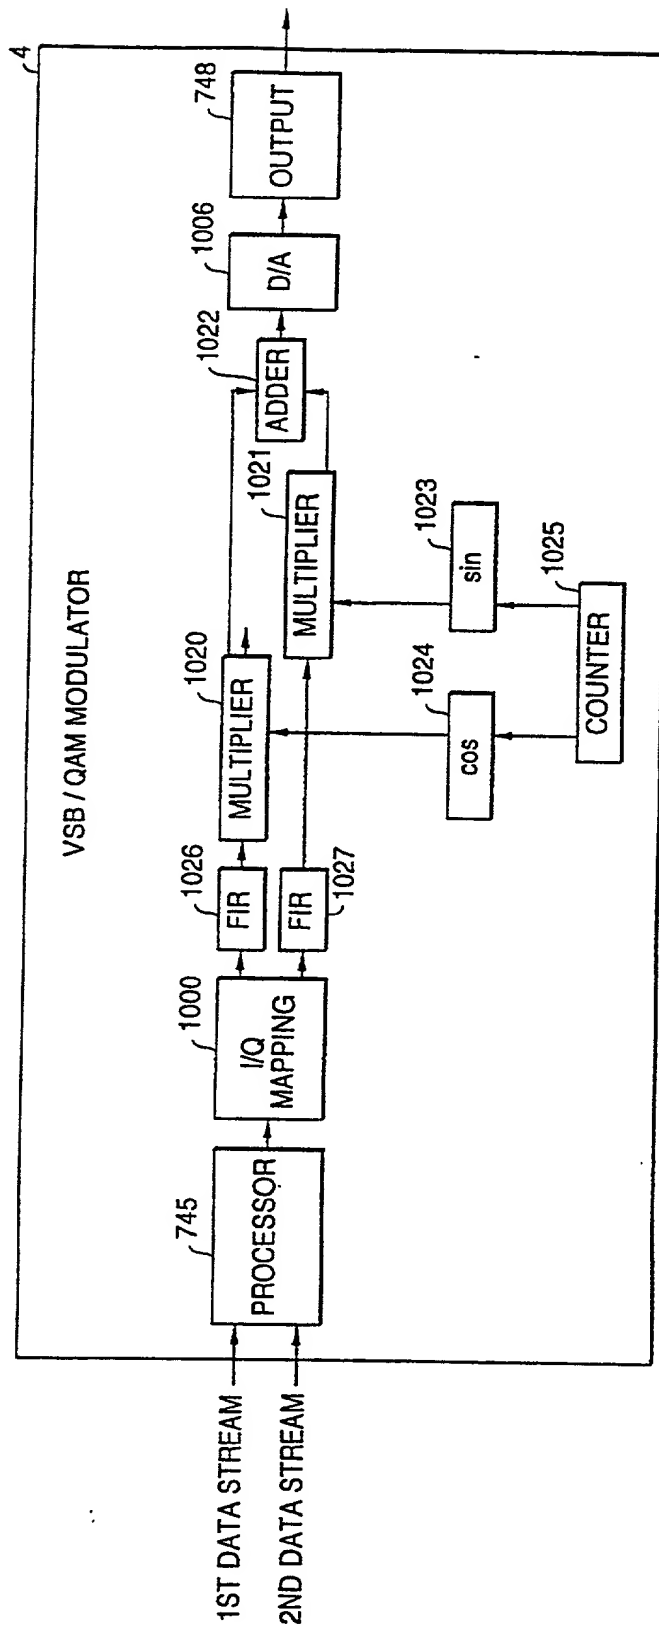


FIG. 177

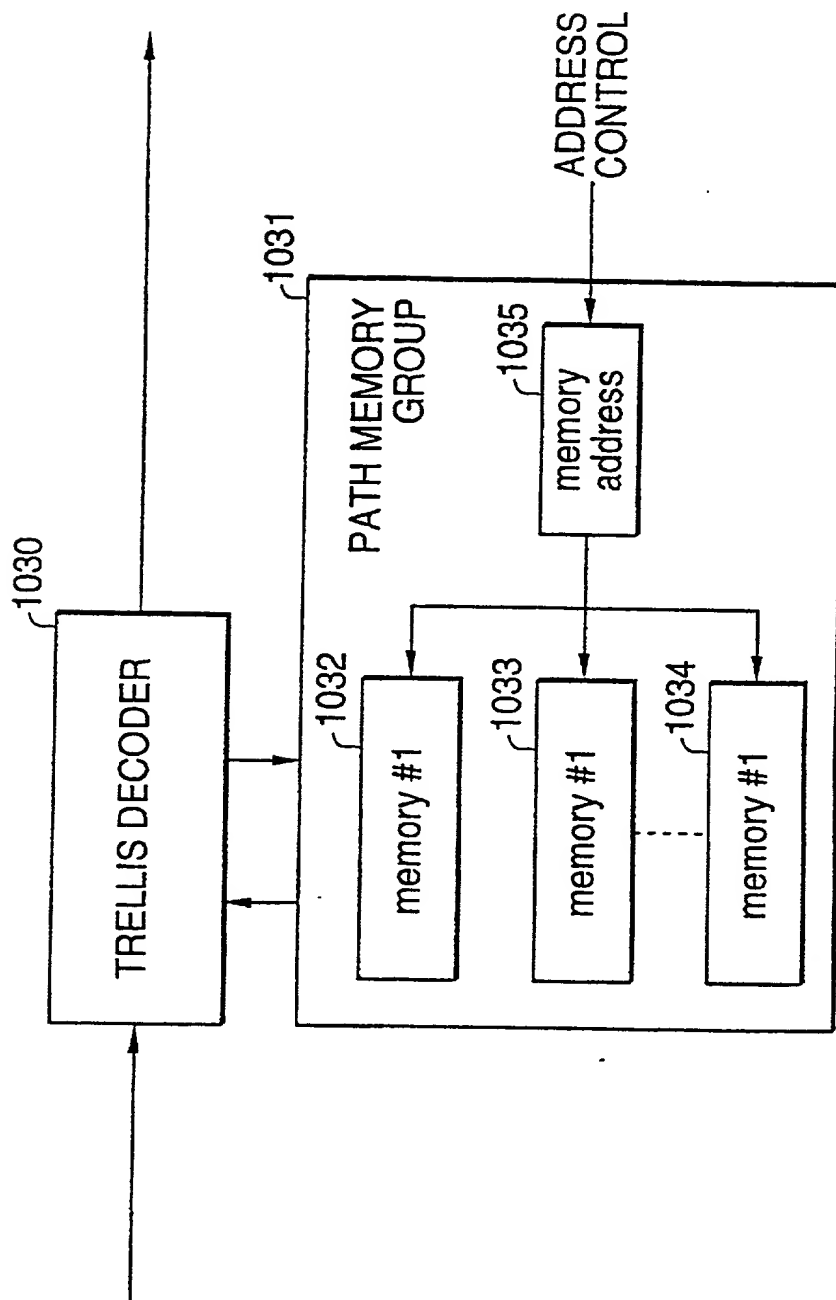


FIG. 178


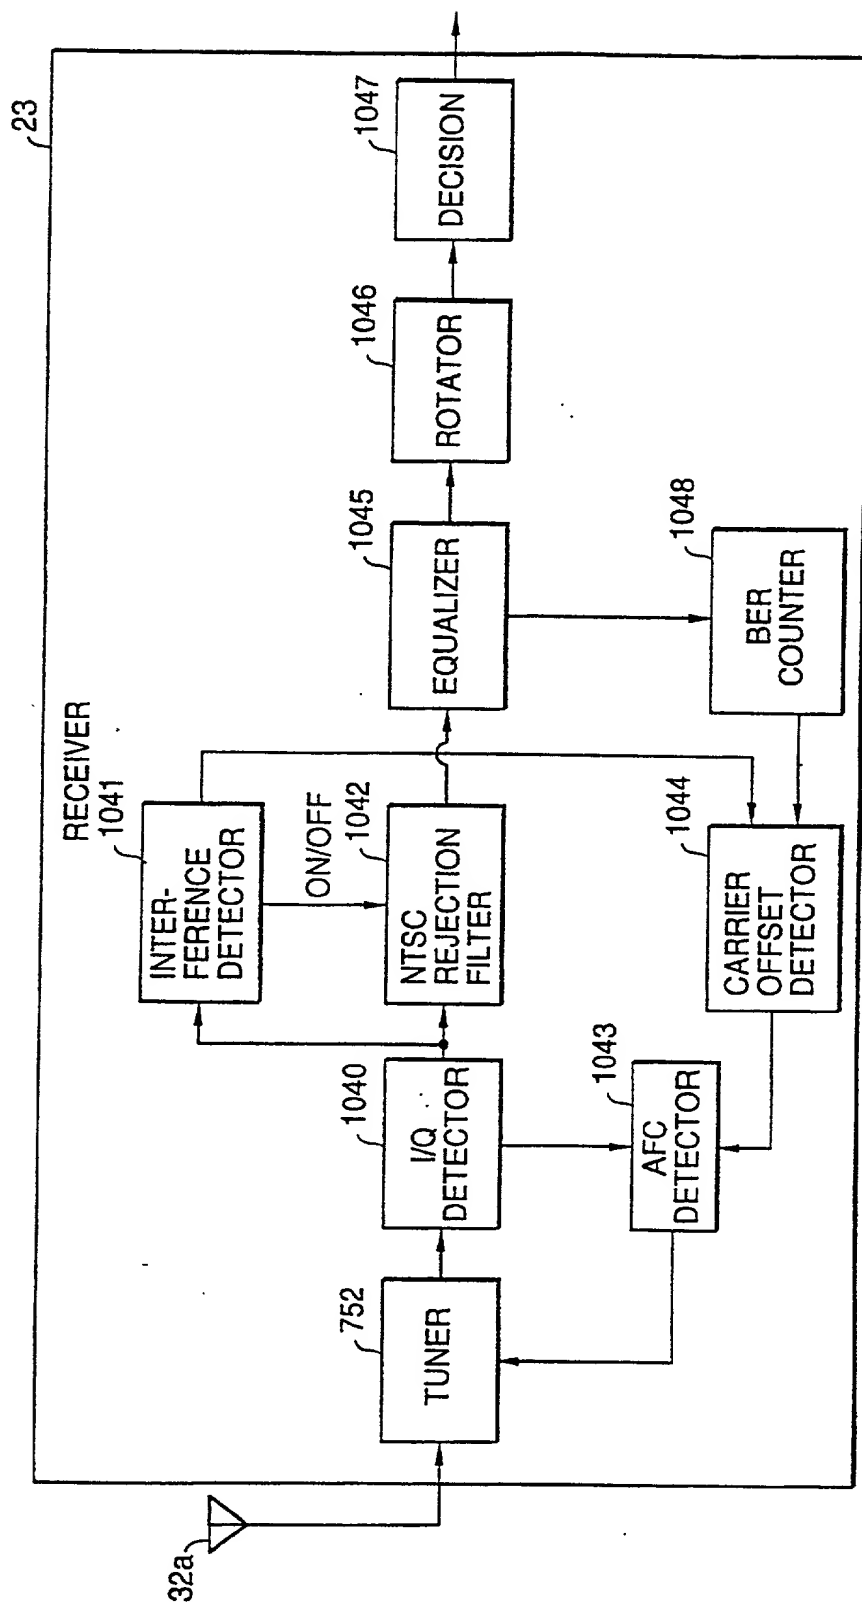


FIG. 179

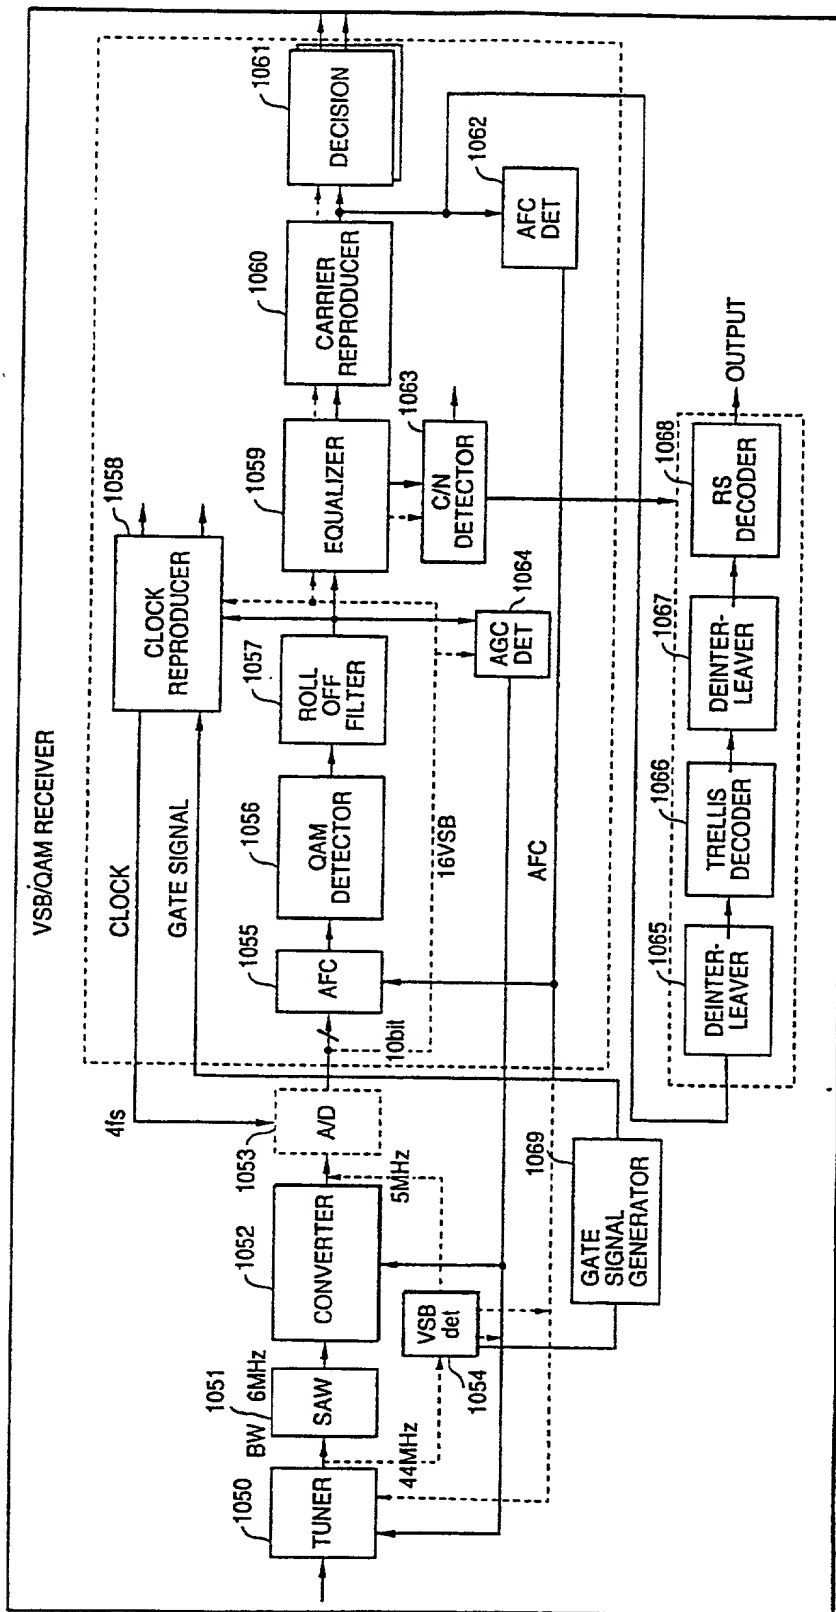

REISSUE DECLARATION AND POWER OF ATTORNEY

(X) Original () Supplemental () Substitute () PCT () DESIGN

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: COMMUNICATION SYSTEM

of which is described and claimed in:

() the attached specification, or

() the specification in application Serial No. ____, filed ____, and with amendments through (if applicable),

() the specification in International Application No. ____, filed ____, and as amended on ____ (if applicable), or

(X) letters patent number 5,600,672 granted on February 4, 1997 and in the attached specification for which I solicit a reissue patent.

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	3-62798	March 27, 1991	Yes
Japan	3-95813	April 25, 1991	Yes
Japan	3-155650	May 29, 1991	Yes
Japan	3-182236	July 23, 1991	Yes
Japan	4-60739	March 17, 1992	Yes
Japan	5-132984	May 10, 1993	Yes
Japan	5-261612	September 24, 1993	Yes
Japan	5-349972	December 27, 1993	Yes
Japan	6-79668	March 24, 1994	Yes

I verily believe that the above original patent is partly inoperative by reason of claiming more or less than I had a right to claim.

A Statement of at least One Error

The original patent claims claim more or less than I had a right to claim. For example, the claims do not recite that the apparatus includes an error correction coder operable to trellis encode the second data stream of a VSB signal having first and second data streams along with a modulator operable to modulate the first data stream in such a way that the first data stream includes data for demodulation including information representing the number of signal points of the second data stream in a signal space and such that the number of signal points of the first data stream is equal to or less than 4.

All errors being corrected in this reissue application up to the time of filing of the present declaration arose without any deceptive intention on my part or on my behalf.

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED
07/857,627	March 25, 1992	ABANDONED
09/244,037	February 4, 1999	PENDING

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils Pedersen, Reg. No. 33,145; and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from AOYAMA & PARTNERS as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, D.C. 20006

WENDEROTH, LIND & PONACK, L.L.P.
Area Code (202) 721-8200

Direct Facsimile Messages to:
Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME OSHIMA	FIRST GIVEN NAME Mitsuaki	SECOND GIVEN NAME
Residence & Citizenship	CITY Kyoto-shi	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS Matsushita Electric Industrial Co., Ltd., 1006, Kadoma, Osaka 571, Japan	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Second Inventor	FAMILY NAME SAKASHITA	FIRST GIVEN NAME Seiji	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS Matsushita Electric Industrial Co., Ltd., 1006, Kadoma, Osaka 571, Japan	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Third Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Fourth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Fifth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.


1st Inventor _____ Date _____
Mitsuaki OSHIMA
2nd Inventor _____ Date _____
Seiji SAKASHITA
3rd Inventor _____ Date _____
4th Inventor _____ Date _____
5th Inventor _____ Date _____
6th Inventor _____ Date _____

The above application may be more particularly identified as follows:

U.S. Application Serial No. _____ Filing Date September 29, 2000

Applicant Reference Number 532125 MaI Atty Docket No. 2000 1328

Title of Invention COMMUNICATION SYSTEM



REISSUE DECLARATION AND POWER OF ATTORNEY

(X) Original () Supplemental () Substitute () PCT () DESIGN

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: COMMUNICATION SYSTEM

of which is described and claimed in:

- () the attached specification, or
 () the specification in application Serial No. ____, filed ____, and with amendments through (if applicable),
 () the specification in International Application No. ____, filed ____, and as amended on ____ (if applicable), or
 (X) letters patent number 5,600,672 granted on February 4, 1997 and in the attached specification for which I solicit a reissue patent.

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	3-62798	March 27, 1991	Yes
Japan	3-95813	April 25, 1991	Yes
Japan	3-155650	May 29, 1991	Yes
Japan	3-182236	July 23, 1991	Yes
Japan	4-60739	March 17, 1992	Yes
Japan	5-132984	May 10, 1993	Yes
Japan	5-261612	September 24, 1993	Yes
Japan	5-349972	December 27, 1993	Yes
Japan	6-79668	March 24, 1994	Yes

I verily believe that the above original patent is partly inoperative by reason of claiming more or less than I had a right to claim.

A Statement of at least One Error

The original patent claims claim more or less than I had a right to claim. For example, the claims do not recite that the apparatus includes an error correction coder operable to trellis encode the second data stream of a VSB signal having first and second data streams along with a modulator operable to modulate the first data stream in such a way that the first data stream includes data for demodulation including information representing the number of signal points of the second data stream in a signal space and such that the number of signal points of the first data stream is equal to or less than 4.

All errors being corrected in this reissue application up to the time of filing of the present declaration arose without any deceptive intention on my part or on my behalf.

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED
07/857,627	March 25, 1992	ABANDONED
09/244,037	February 4, 1999	PENDING

And I hereby appoint Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nolton, Reg. No. 25,408; Warren M. Check, Jr., Reg. No. 33,367; Nils Pedersen, Reg. No. 33,145; and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., jointly and severally, attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from AOYAMA & PARTNERS as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.
2033 K Street, N.W., Suite 800
Washington, D.C. 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.
Area Code (202) 721-8200

Direct Facsimile Messages to:

Area Code (202) 721-8250

Full Name of First Inventor	FAMILY NAME OSHIMA	FIRST GIVEN NAME Mitsuaki	SECOND GIVEN NAME
Residence & Citizenship	CITY Kyoto-shi	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS Matsushita Electric Industrial Co., Ltd., 1006, Kadoma, Osaka	CITY Osaka	STATE OR COUNTRY Japan ZIP CODE 571-
Full Name of Second Inventor	FAMILY NAME SAKASHITA	FIRST GIVEN NAME Seiji	SECOND GIVEN NAME
Residence & Citizenship	CITY Osaka	STATE OR COUNTRY Japan	COUNTRY OF CITIZENSHIP Japan
Post Office Address	ADDRESS Matsushita Electric Industrial Co., Ltd., 1006, Kadoma, Osaka	CITY Osaka	STATE OR COUNTRY Japan ZIP CODE 571-
Full Name of Third Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Fourth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Fifth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE
Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Mitsuaki OSHIMA Date October 26, 2000
Mitsuaki OSHIMA
2nd Inventor Seiji SAKASHITA Date October 26, 2000
Seiji SAKASHITA
3rd Inventor _____ Date _____
4th Inventor _____ Date _____
5th Inventor _____ Date _____
6th Inventor _____ Date _____

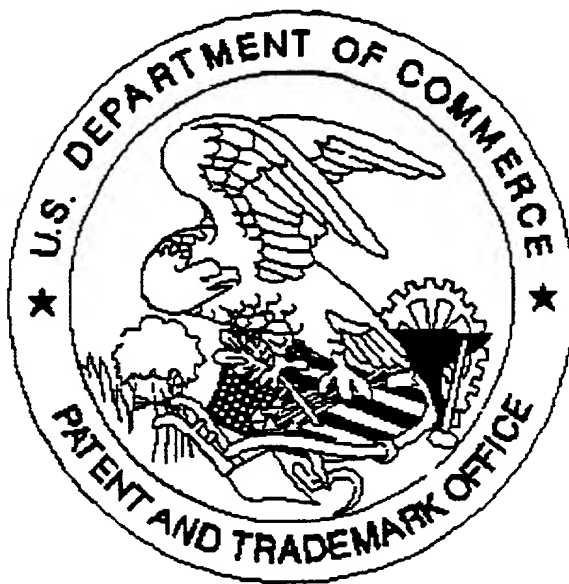
The above application may be more particularly identified as follows:

U.S. Application Serial No. _____ Filing Date September 29, 2000

Applicant Reference Number 532125 MaI Atty Docket No. 2000_1328

Title of Invention COMMUNICATION SYSTEM

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division



Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ *Scanned copy is best available. Drawings.*